



- ### KEY NOTES
- CONNECT TO SWITCHES SUPPLIED WITH BOX COOLER/FREEZER.
 - COORDINATE LOCATION WITH LUCKY'S MARKET.
 - CONNECT TO BUILDING MOUNTED SIGN. FIELD VERIFY LOCATION. CIRCUIT TO BE ROUTED THROUGH CONTACTOR FOR DUSK TO DAWN OPERATION.
 - RUN AN UNSWITCHED LEG OF CIRCUIT INDICATED TO EMERGENCY INSET ON DRIVER.
 - EMERGENCY AND NIGHT LIGHT FIXTURES INTENDED FOR 24 HOUR USE TO BE WIRED AHEAD OF ANY CONTROLS.
 - WALK IN LIGHTING TO BE COORDINATED WITH OTHER DISCIPLINES.
 - PHOTOCELL FOR DAYLIGHTING CONTROL OF ITS RESPECTIVE DAYLIGHTING ZONE. RUN 0-10 VOLT CONTROL WIRES FOR EACH "A" AND "A" FIXTURE BACK TO THE ZONES RESPECTIVE DIMMING CONTROL LOCATED IN THE LIGHTING CONTROL. SEE E201 AND E202 FOR ADDITIONAL DETAIL.
 - 0-10V DIMMING CONTROLLER SWITCHES TO BE SET MANUAL ON WITH FULL DIMMING CAPABILITY THEN AUTOMATIC OFF 15 MIN AFTER NO MOVEMENT.
 - LIGHTING OVERIDE SWITCHES SEE E201, EM1 AND EM4 FOR ADDITIONAL INFORMATION.
 - CEILING FANS SHALL BE MOUNTED TO THE ROOF JOISTS AND SUPPORTED WITH CEILING FAN RATED JUNCTION BOXES. COORDINATE MOUNTING IN THE FIELD. FANS ARE TO OPERATE 24/7. WIRE TO CIRCUIT PER E201.
- CONTRACTOR TO VERIFY IN FIELD WHICH PANEL THE CIRCUIT IS FED FROM AND ADJUST PANEL ACCORDINGLY.

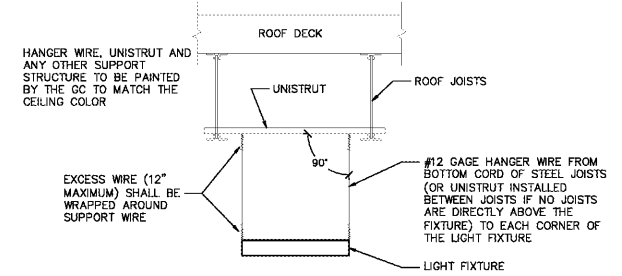

3 LIGHTING SUPPORT DETAIL
E201 NOT TO SCALE

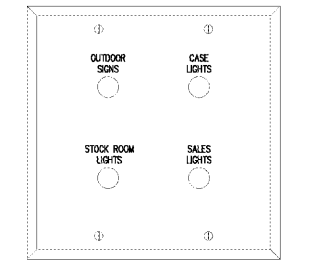

2 LIGHTING OVERRIDE
E201 NOT TO SCALE


- INSTALL BLANK STAINLESS STEEL COVER PLATE ON DOUBLE GANG OUTLET BOX AND PLASTER FINISH.
- DRILL 4 HOLES IN THE CORNER PLATE AND INSTALL MOMENTARY PUSH BUTTON OVERIDE SWITCHES (CARDNER BENDER GSW-22 OR EQUAL).
- PROMOTE LABELS FOR OVERIDE SWITCHES AS NOTED.

ID	CONTACTOR	RATING	POLES	COIL POWER	DESCRIPTION	CONTROL
A	ASCO #18	20 AMP	14	PH-13	CONTACTOR TO CONTROL STORE LIGHTS	ON DURING STORE HOURS
OS	ASCO #18	20 AMP	2	PH-13	CONTACTOR TO CONTROL OUTDOOR LIGHTS AND SIGNS	ON WHEN DARK OUTSIDE
CL	ASCO #18	20 AMP	1	PH-13	CONTACTOR TO CONTROL CASE LIGHTS	ON DURING STORE HOURS
SR	ASCO #18	20 AMP	1	PH-13	CONTACTOR TO CONTROL THE STOCK ROOM LIGHTS	ON DURING STORE HOURS
PC	ASCO #18	20 AMP	1	PH-13	CONTACTOR TO CONTROL THE PASTA COOKER EYE	ON WHEN PASTA COOKER IS OPERATING SEE E201 FOR MORE DETAIL
RP	ASCO #18	20 AMP	1	PH-13	CONTACTOR TO CONTROL THE REFRIGERATION PUMP	ON DURING STORE HOURS AND RETURN TO OFF FOR 15 MIN AFTER STORE CLOSURE SEE E201 FOR MORE DETAIL
DW	ASCO #18	20 AMP	1	PH-13	CONTACTOR TO CONTROL THE DISHWASHER EYE	ON WHEN DISHWASHER IS OPERATING SEE E201 FOR MORE DETAIL


QUANTITY	MANUFACTURER	PART #	DESCRIPTION	COMMENTS
7	HELL	LZM2	LZM2 DIMMING CONTROLLER	0-10 VOLT DIMMING CONTROLLERS SHALL EACH CONTROL A LIGHTING ZONE (E LS-A THROUGH LS-G). SEE ZONES ON E201 & CONTROLS ON DM4.
1	OPC	840-0058	TRANSFORMER TO POWER CONTROL BOARD AND DIMMING CONTROLLER	TRANSFORMER AND POWER TO CONTROL BOARD AND DIMMING CONTROLLER SHALL BE PROVIDED.
2	OPC		MFRSAG	SEE E201 FOR MORE INFORMATION.

NOTES:
1. LUCKY'S SHALL PROVIDE THE CONTRACTOR WITH A CONTROL PANEL CONTAINING ALL OF THE ITEMS ABOVE. CONTRACTOR SHALL INSTALL CONTROL PANEL AND PROVIDE NECESSARY WIRING FROM ELECTRICAL PANELS TO CONTACTORS, FROM CONTACTORS TO ITEMS BEING CONTROLLED AND FROM CONTROL BOARDS TO OTHER CONTROL DEVICES FOR NO DIMMING.

1 LIGHTING PLAN
E201 1/8" = 1'-0"



Lucky's Market
 LUCKY'S MARKET
 6420 NAPLES BLVD.
 NAPLES, FLA. 34108

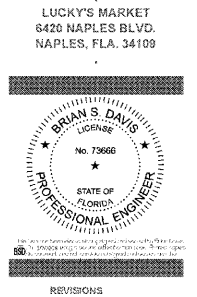

REVISIONS

PERMIT ISSUE
 APRIL 27, 2019
 BID ISSUE 04/27/19
 STORE NUMBER
 57

WD PROJECT NUMBER
 LKYUP001

E201

LIGHTING PLAN