

KEYNOTES

16.145	CONNECT TO EXISTING BRANCH CIRCUIT. VERIFY PRIOR TO ROUGH-IN THAT EXISTING CIRCUIT HAS CAPACITY TO ACCOMMODATE NEW LOAD. VERIFY CONDITION OF BRANCH CIRCUIT, CONDUIT AND WIRE PRIOR TO USE TO INSURE THAT THEY MEET ALL U.L. RATINGS AND REPLACE AS REQUIRED.
16.489	RELOCATE, EXTEND, AND RECONNECT CIRCUITRY AND ELECTRICAL DEVICES FOR RELOCATED EQUIPMENT. VERIFY CONDITION OF BRANCH CIRCUITRY, CONDUIT AND WIRE TO ENSURE THEY MEET ALL U.L. RATINGS AND REPLACE AS REQUIRED. VERIFY FINAL LOCATION OF RELOCATED EQUIPMENT WITH WALMART CONSTRUCTION MANAGER PRIOR TO ROUGH-IN. CONNECT CIRCUIT(S) TO EXISTING BRANCH CIRCUITRY. MINIMUM WIRE SIZE AND PANELBOARD CIRCUIT ARE NOTED. VERIFY SIZE, RATING AND CONDITION OF EXISTING BRANCH CIRCUIT CONDUIT AND WIRE PRIOR TO USE TO ENSURE THAT THEY MEET REQUIRED SIZE, AND ALL U.L. RATINGS AND REPLACE AS REQUIRED.
16.957	

POWER DROP SCHEDULE

NO.	DESCRIPTION
PD1	MOUNT RECEPTACLE(S) ON TOP OF DISPLAY UNIT(S)
PD2	MOUNT RECEPTACLE(S) 6" ABOVE BASE OF DISPLAY UNIT(S) SO THAT RECEPTACLE(S) AND CONDUIT DO NOT INTERFERE WITH SHELF HEIGHT ADJUSTMENTS
PD3	PROVIDE DIRECT CONNECTION TO EQUIPMENT
PD4	OPEN STRUCTURE MOUNT RECEPTACLE AT BAR JOIST AND INSTALL FURNISHED CORD REEL. LAY-IN CEILING: PROVIDE RECESSED CEILING RECEPTACLE AND INSTALL FURNISHED CORD REEL BELOW CEILING. CORD REEL SHALL BE MOUNTED TO CEILING FAN RATED. JUNCTION BOX SECURED TO LAY-IN CEILING WITH T-BAR BOX HANGER. PROVIDE 1/2" THREADED STEEL ROD FROM JUNCTION BOX TO BOTTOM OF STRUCTURAL JOIST OR CHANNEL STRUT BRIDGING ABOVE FOR SUPPORT.

POWER DROP NOTES


- POWER DROPS WILL BE IDENTIFIED BY AN IPTV TAG OR POWER TAG, I.E. 44A, 46E, ETC. ALL CHECKOUT POWER SHALL BE CONSIDERED POWER DROPS.
- A REVISION OF THIS PLAN BASED ON THE FINAL MERCHANDISE LAYOUT MAY BE ISSUED TO SHOW FINAL LOCATIONS FOR THE POWER DROPS. IF THE MERCHANDISE LAYOUT DOES NOT CHANGE, THIS PLAN WILL NOT BE REISSUED. PROVIDE CIRCUITRY TO DISPLAY TRACKS AS THE TRACKS ARE SET. IN ADDITION, THE FOLLOWING POWER DROP NOTES APPLY:
 - THERE WILL BE NO ADDITIONAL CHARGE FOR DROP RELOCATION WITHIN POWER DROP ZONES DEFINED ON DRAWING.
 - AT CLOSE OF PROJECT THE GENERAL CONTRACTOR AND CONSTRUCTION MANAGER SHALL REVIEW ADDITIONAL OR DELETED POWER DROPS FOR EACH ZONE TO VERIFY ANY ADDITIONAL CHARGE CREDITS THAT APPLY DUE TO CHANGES.
 - ADDING OR SUBTRACTING POWER DROPS TO ANY ZONE WILL RESULT IN A FINAL CHARGE ACCORDING TO SPECIAL CONDITIONS.
- PROVIDE JUNCTION BOX AND CIRCUITRY TO NEAREST ABOVE LOCATION SHOWN ON DRAWING. CONDUIT AND CIRCUITRY FROM JUNCTION BOX TO END OF DISPLAY RACK AWAY FROM ACTION ALLEY.

REDESIGN
RETAIL DESIGN COLLABORATIVE

10171 E. 37th Dr.
Aurora, CO 80017
770.213.6365
rtdesign.com

STIPULATION FOR THE CONTRACTOR TO PURCHASE AND INSTALL NEW STARLINE BUS CIRCUIT BREAKER PLUG-IN UNITS AS REQUIRED.

CONTACT: MICHELLE JON MATTHEWS OR RANDY MATTHEWS (501) 821-2203 EXT. 301
WALMART@MICHELLEJ.COM

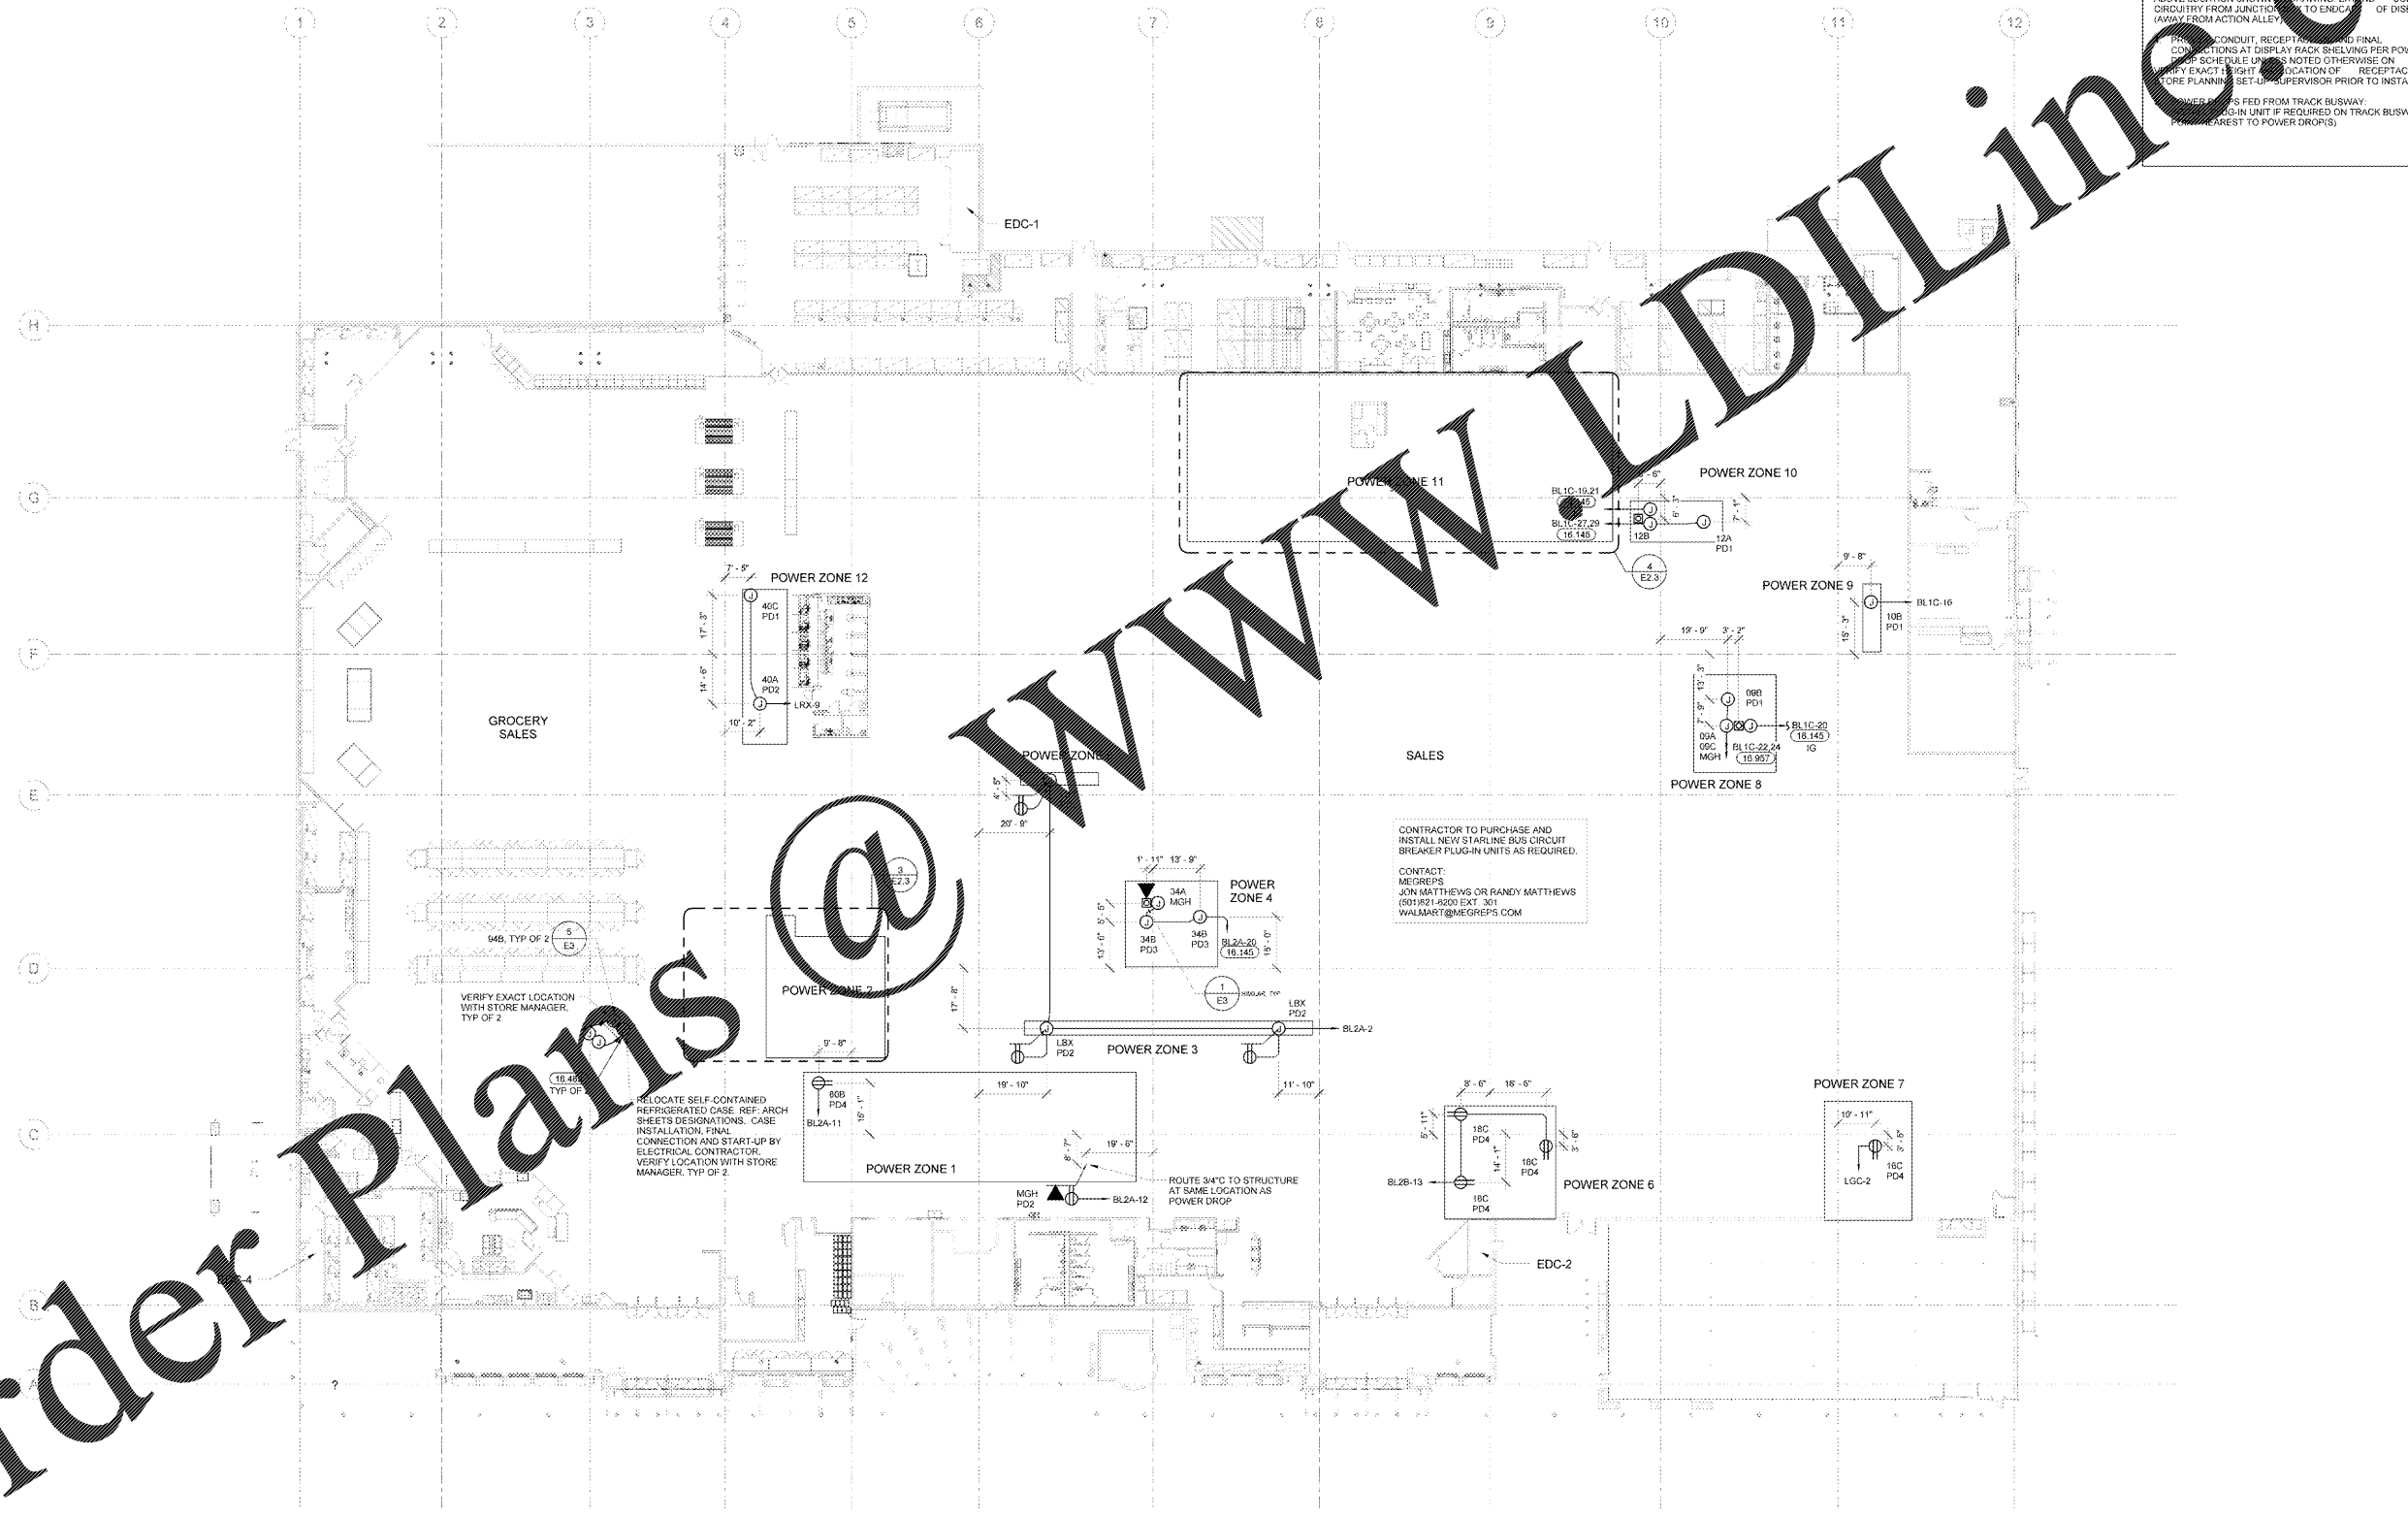

Order Plans @

WWW.LDILine.COM

CONSULTANTS

JASPER L. ADAMS
1001 S. GARDNER ST.
SUITE 202
GORDONSVILLE, VA 23053
PHONE: 804.561.4271
FAX: 804.561.4272
PROJECT: 1612725

Walmart
GORDONSVILLE, VA
161 CAMP CREEK PKWY, LOUISA, VA 23093
STORE NO.: 1612725

ISSUE BLOCK

NO.	DESCRIPTION	DATE

CHECKED BY: BMD
DRAWN BY: JRL
PROTO CYCLE: 02/23/18
DOCUMENT DATE: 04/10/18
BG PROJECT NO: 1612725

This document is the property of Jasper Adams, P.E. and is not to be distributed or used for any other project without the written consent of Jasper Adams, P.E.

NOT FOR CONSTRUCTION

1 POWER DROP PLAN
1" = 20'-0"

EACH SUBCONTRACTOR IS RESPONSIBLE FOR HAVING A THOROUGH KNOWLEDGE OF ALL DRAWINGS AND SPECIFICATIONS IN THEIR RELATED FIELD. THE FAILURE TO ACQUAINT THEMSELVES WITH THIS KNOWLEDGE DOES NOT RELIEVE THE RESPONSIBILITY OF PERFORMING THE WORK PROPERLY. NO ADDITIONAL COMPENSATION SHALL BE ALLOWED BECAUSE OF CONDITIONS THAT OCCUR DUE TO FAILURE TO FAMILIARIZE WORKERS WITH THIS KNOWLEDGE.

EXISTING CONDITIONS WERE TAKEN FROM ORIGINAL DRAWINGS AND MAY NOT REFLECT EXACT "AS-BUILT" CONDITIONS. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO SUBMITTING FINAL BIDS. CONTRACTOR SHALL CAREFULLY COORDINATE NEW WORK AND DEMOLITION WITH ALL OTHER DISCIPLINES AND EXISTING CONDITIONS.

POWER DROP PLAN

SHEET: **E2.1**