



GENERAL NOTES		
NO.	REVISION/DATE	DATE

THE DRAWINGS AND SPECIFICATIONS DEPICTED HEREIN ARE THE EXCLUSIVE PROPERTY OF HOT TOPIC, INC. AND AS SUCH CANNOT BE REPRODUCED IN WHOLE OR PART WITHOUT OUR PRIOR WRITTEN CONSENT.

2016 BOX LUNCH


# BOX LUNCH

18305 E. SAN JOSE AVE.  
CITY OF INDUSTRY, CA 91748  
PH. (626) 839-4681

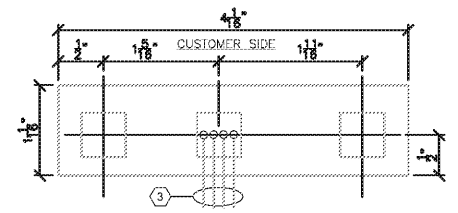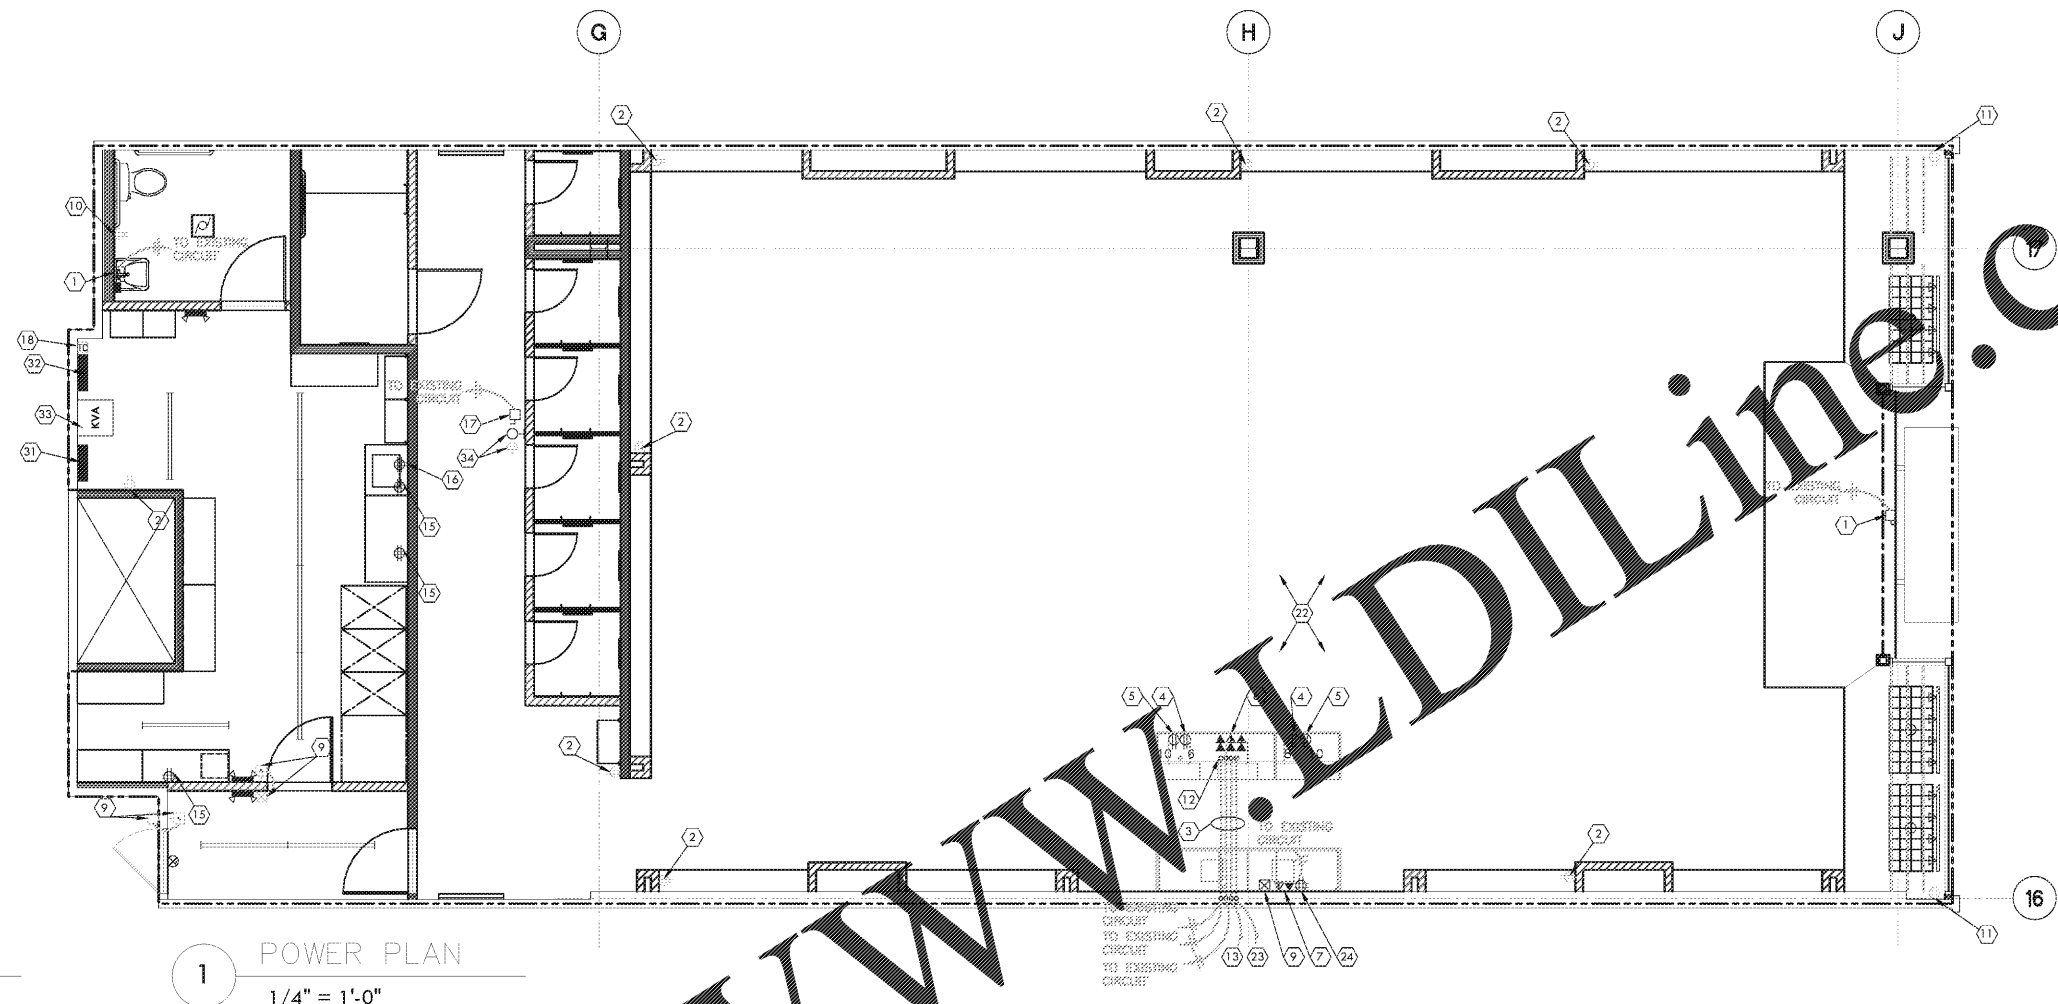

3 cashwrap access panel  
NTS

1 POWER PLAN  
1/4" = 1'-0"

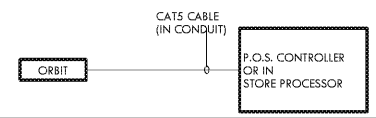

4 shopper trak detail  
1/4" = 1'-0"

**GENERAL CONTRACTOR NOTES:**

- THE ORBIT 5 UNIT WILL BE INSTALLED CENTERED ABOVE THE DOORWAY. THE DISTANCE IN FROM THE DOORWAY WILL VARY DEPENDING ON WHETHER OR NOT THERE IS A DOOR THAT IS USED DURING THE DAY, AND WHICH DIRECTION THE DOOR SWINGS.
  - IF THERE IS NO DOOR AT THE DOORWAY, OR THE DOORS WILL BE PROPPED OPEN DURING THE DAY THE ORBIT 5 WILL BE MOUNTED 6"-12" INSIDE OF THE DOORWAY.
  - IF THERE IS A DOOR THAT SWINGS OUT, THE ORBIT 5 WILL BE MOUNTED 12"-18" INS. THE DOORWAY.
  - IF THERE IS A DOOR THAT SWINGS IN, THE ORBIT 5 WILL BE MOUNTED 4"-6" IN FROM THE FURTHEST IN-SWING OF THE DOOR.
- IF THE MOUNTING BRACKET FOR THE ORBIT 5 IS MOUNTED TO A CEILING, THE BRACKET WILL BE ATTACHED TO THE CEILING. FOR CEILING HEIGHTS HIGHER THAN 15', SHOPPER TRAK WILL INSTALL A MOUNTING BRACKET THAT ATTACHES TO THE WALL ITSELF. IF THE CEILING HAS A TRUSS, THE UNIT WILL BE MOUNTED INSIDE OF THE STORE ITSELF, RATHER THAN TO THE VESTIBULE.
- IF THE STORE HAS A HARD (PLASTER OR SHEETROCK) CEILING, INSTALL A JUNCTION BOX AT LEAST 18" AWAY FROM THE RECOMMENDED ORBIT LOCATION SPECIFIED ABOVE. PROVIDE 1/2" CONDUIT WITH PULL STRING FROM THE COMMUNICATIONS STRUCTURE TO A LOCATION ABOVE ENTRY SIGN. LOOP CONDUIT TO OTHER DOORS AS REQUIRED.

**COMMUNICATION WORK:**

- FOR SINGLE ORBIT 5 INSTALLATIONS, A CATEGORY 5 CABLE MUST BE RUN FROM THE STORE CONTROLLER/SP TO THE FRONT DOOR (MAIN CUSTOMER ENTRANCE).

2 NOT USED  
NTS

**POWER KEYED NOTES**

- RUN ELECTRICAL IN 3/4" RIGID CONDUIT TO PORTAL AND UP TO SIGN. ROUTE CONDUITS AS SHOWN ON PLAN DOWN WALL AND THEN TO A J-BOX. RUN 1/2" MC CABLE THROUGH THE STOREFRONT SILL CHANNEL AND UP THE PORTAL TO SIGN RACEWAY. COORDINATE EXACT CONFIGURATION WITH TENANT REP. AND LOCATION WITH SIGNAGE VENDOR E.C. SHALL INSTALL DISCONNECT SWITCH FOR SIGNAGE CIRCUIT(S) AS REQUIRED BY N.E.C. 600. REFER TO PLANS FOR NUMBER OF CIRCUITS REQUIRED. VERIFY EXACT LOCATION IN FIELD.
- EXISTING DUPLEX RECEPTACLE RECURCUIT AS INDICATED.
- RUN ELECTRICAL IN (1) 1" AND RUN PHONES IN (1) 2" RIGID CONDUIT TO CASHWRAP. ROUTE CONDUITS AS SHOWN ON PLAN DOWN WALL AND BY SAW CUTTING OR CORE DRILLING FLOOR AS REQUIRED BY LANDLORD. PATCH FLOOR AS REQUIRED. COORDINATE EXACT CONFIGURATION WITH TENANT REP. AND LOCATION WITH FIXTURE INSTALLER. ELECTRICAL CONDUIT AND WIRE AT CASHWRAP TO CONNECT TO PRE-INSTALLED J-BOX FOR FINAL CONNECTION.
- DEDICATED DUPLEX OUTLET, (HUBBELL OR EQUAL) WITH DEDICATED GROUND, MTD. WITHIN CABINET AT 6" A.F.F. FIELD VERIFY EXACT LOCATION WITH FIXTURE MANUFACTURER.
- DUPLEX CONVENIENCE OUTLET MOUNTED IN CASH/WRAP COUNTER. FIELD VERIFY EXACT LOCATION WITH FIXTURE MANUFACTURER.
- (5) COMPUTER JACKS AND (1) PHONE JACK IN CASHWRAP. (5) RJ-45 CONNECTIONS AND (1) RJ-14 DUAL PORT CONNECTION. FIELD VERIFY EXACT LOCATION WITH FIXTURE MANUFACTURER AND BOX LUNCH P.M. FURNISHED AND INSTALLED BY BOX LUNCH VENDOR.
- DEDICATED QUADPLEX RECEPTACLE, (HUBBELL OR EQUAL) MOUNTED IN WALL AT 36" A.F.F. AT STOCK ROOM DESK.
- IF NOT EXISTING, PROVIDE A DELIVERY BUZZER SYSTEM SIMILAR OR EQUAL TO THOMAS & BETTS WITH TRANSFORMER, PUSH BUTTON AND BELL (DHP42, E.C. SHALL PROVIDE ALL J-BOXES, CONDUITS & WIRES TO COMPLETELY INSTALL THE SYSTEM. FIELD VERIFY PRIOR TO BID.
- EXISTING G.F.C.I. DUPLEX RECEPTACLE TO REMAIN.
- EXISTING DUPLEX RECEPTACLE FOR SHOW WINDOW TO REMAIN. RECURCUIT IF REQ'D.
- BMT STUB-UP FOR ALL CASHWRAP SYSTEMS, (I.E., OUTLETS, LIGHTING, PHONES, AND LOW VOLTAGE SYSTEMS). EXTEND TO THE DEVICES AS REQUIRED. GANG ALL CONDUITS TOGETHER AND RUN TO THE DEVICES IN THE MOST INCONSPICUOUS MANNER POSSIBLE. SEE DETAIL #3 THIS SHEET.
- 2" CONDUIT BETWEEN IT CABINET/DATA RACK AND CASHWRAP WITH PULL STRING BY G.C. LOW VOLTAGE WIRING WILL BE DONE BY BOX LUNCH.
- EXISTING JUNCTION BOX FOR SPEAKER TO REMAIN.
- PROVIDE QUADPLEX RECEPTACLE MOUNTED AT 96" A.F.F. TO CENTER WITHIN IT CABINET. VERIFY EXACT REQUIREMENTS WITH FIXTURE VENDOR.
- QUADPLEX RECEPTACLE MOUNTED IN WALL AT 84" A.F.F. WITHIN T.T.B. FOR PHONE SYSTEM, ALARM, OR OTHER RELATED EQUIPMENT.
- 480V-3P-WP-30AS-30AF DISCONNECT SWITCH FOR VAV. (21-7FA)
- EXISTING 24 HOUR TIME CLOCK MOUNTED ON WALL NEAR ELECTRICAL PANEL TO REMAIN
- SENSORMATIC ALARM BOX MOUNTED ON SHELF AT 8'-1" A.F.F. IN PORTAL NEXT TO CONTROL BOX. VERIFY AND COORDINATE EXACT LOCATION AND OTHER RELATED ELECTRICAL EQUIPMENT.
- SENSORMATIC DIGITAL DOOR-MAX ANTENNAS. SEE DETAIL #2 THIS SHEET.
- 20A RATED QUADPLEX DEDICATED RECEPTACLE WITH ISOLATED GROUND FOR SECURITY SYSTEM. SPACE IS OPEN TO DECK NO CEILING. THE AC SOURCE MUST BE A 3-WIRE 24 HOUR UNSWITCHED OUTLET WITH LESS THAN 0.5 VAC BETWEEN NEUTRAL AND GROUND. PROVIDE "LOCK-ON" DEVICE ON BREAKER AT PANEL. RACEWAY FROM POWER PACK MOUNTED ABOVE ON BACK SIDE OF SOFFIT DOWN TO EACH ANTENNA. WIRE RUN CANNOT EXCEED 30 FEET AND MUST BE HIDDEN IN RACEWAY. VERIFY EXACT SPECS WITH SENSORMATIC ELECTRONIC CORPORATION C/O ROBERT BENSON @ 1-714-920-0905. SEE DETAIL #2 THIS SHEET. RECEPTACLE AND COVER TO BE BLACK.
- E.C. SHALL FIELD VERIFY EXACT REQUIREMENTS FOR SMOKE/FIRE ALARM SYSTEM. REUSE ANY EXISTING DETECTION SYSTEM. REPLACE ANY DEFECTIVE DEVICES. IF THERE IS NOT AN EXISTING SYSTEM, E.C. SHALL SUPPLY AND INSTALL ALL NECESSARY EQUIPMENT (SMOKE DETECTORS, AUDIO/VISUAL ALARMS, FIRE ALARM PANEL, CONDUIT, WIRE, ETC.) FOR A NEW SYSTEM AS MAY BE REQUIRED BY (LANDLORD AND/OR LOCAL FIRE MARSHALL. INSTALL SMOKE DETECTORS IN SUPPLY OR RETURN DUCTWORK AS REQUIRED BY LOCAL AUTHORITY. FIELD VERIFY AND COORDINATE E.C. TO PROVIDE ALL FIRE ALARM DRAWINGS AS REQUIRED.
- FOR AMP/MUSIC PLAYER AND PHONES RUN 1" CONDUITS WITH PULL STRINGS FOR SPEAKER WIRING TO LOCATIONS AS DIRECTED BY THE TENANT'S MUSIC PROVIDER.
- DEDICATED QUADPLEX RECEPTACLE (HUBBELL OR EQUAL) MOUNTED IN BACKWRAP COUNTER AT 6" ABOVE FINISHED BASE. FIELD VERIFY EXACT LOCATION WITH P.M. E.C. TO LEAVE AN 18" WHIP STUBBED OUT AT 18" A.F.F.
- RUN ELECTRICAL IN 3/4" RIGID CONDUIT - ROUTE CONDUITS AS SHOWN ON PLANS DOWN WALL AND THEN TO A J-BOX. RUN IN THE PORTAL TO SENSORMATIC OUTLET. COORDINATE EXACT CONFIGURATION WITH TENANT REP. AND LOCATION WITH SENSORMATIC VENDOR.
- LOCATION OF EXISTING SHOPPER TRAK. RECURCUIT IF REQ'D.
- EXISTING DISCONNECT SWITCH FOR EXISTING WATER HEATER TO REMAIN.
- EXISTING FIRE ALARM CONTROL PANEL TO REMAIN.
- EXISTING PHONE JACK TO REMAIN.
- NOT USED
- EXISTING PANEL "L1".
- EXISTING PANEL "H1"
- EXISTING TRANSFORMER.
- RECEPTACLE AND SWITCHED LIGHT PROVIDED BY E.C. TO BE INSTALLED PER N.E.C. 210-63 AND 210-70C.

**CONSTRUCTION PLAN AND NOTES**

FLORENCE MALL  
2028 FLORENCE MALL, SPACE #2064  
FLORENCE, KY 41042

**E1.0**

Project: BXL 4601  
 Drawn by: S.D.  
 Date: 8.27.18  
 Scale: AS-NOTED