

RECEIVED
AUG 08 2018
175 E. SUNSHINE ST. SUITE 417
SPRINGFIELD, MO

FOR INFORMATIONAL USE ONLY

- PHOTO DIODE SENSOR**
- LOCATION/MOUNTING**
 - A PHOTO DIODE SENSOR SHALL BE MOUNTED IN A WATERTIGHT ENCLOSURE ON THE NORTHERN MOST SIDE OF THE BUILDING.
 - THE PHOTO DIODE MUST BE MOUNTED IN THE PROPER ORIENTATION. THE WATERTIGHT ENCLOSURE SHALL BE MOUNTED USING THE APPROPRIATE WALL ANCHORS. ANY EXTERIOR WALL PENETRATION SHALL BE SEALED PROPERLY WITH WEATHER-TIGHT CAULK/SILICON.
 - CONNECTIONS**
 - THE PHOTO DIODE LEADS MUST BE EXTENDED USING 18-24 AWG SHIELDED TWISTED PAIR CABLE, AND ROUTED BACK TO THE LCA/LCP J5 PS+/- TERMINALS. TERMINALS ARE POLARITY SENSITIVE.



- LCP-2 (LOAD CONTROL PANEL) - NOT APPLICABLE FOR SITES CONTAINING EXISTING SMART LIGHTING CONTROLS**
- LOCATION/MOUNTING**
 - (1) LCP-2 SHALL BE MOUNTED WITHIN THE ELECTRICAL ROOM
 - THE LCP-2 SHALL BE MOUNTED USING THE APPROPRIATE WALL ANCHORS.
 - POWER REQUIREMENTS**
 - THE 120 VAC POWER SOURCE FOR THE LCP-2 MUST BE OBTAINED FROM A DEDICATED 15-20 AMP SINGLE POLE BREAKER.
 - HIGH VOLTAGE KNOCKOUTS FOR THE LCP-2 ARE LOCATED ON THE SIDE/BOTTOM OF THE CABINET ENCLOSURE. WHEN USING SIDE KNOCKOUTS THE INSTALLER SHALL ONLY UTILIZE KNOCKOUTS BELOW THE GROUNDING BAR WITHIN THE LCP-2 CABINET.
 - LOW VOLTAGE KNOCKOUTS FOR THE LCP-2 ARE LOCATED ON THE TOP OF THE CABINET ENCLOSURE.
 - CONNECTIONS**
 - THE LCP-2 SHALL CONTROL THE FOLLOWING:
 - EXTERIOR SIGNS AND BUILDING LIGHTING
 - EXTERIOR PARKING LOT LIGHTS
 - INTERIOR LIGHTING
 - THE LIGHTING ZONES SHALL BE SEPARATED PER THE SOW.
 - LINE AND LOAD WIRING SHALL BE ROUTED FROM THE ELECTRICAL PANEL CONTAINING THE CIRCUITS TO BE CONTROLLED BACK TO THE LCP-2. SINCE THE LCP-2 DOES NOT REQUIRE NEUTRAL WIRES, LINE AND LOAD WIRING MUST ENTER AND EXIT THE LCP-2 THROUGH THE SAME CONDUIT. LINE SIDE WIRING IS ON THE LEFT SIDE OF THE CONTACTORS AND LOAD SIDE WIRING IS ON THE RIGHT SIDE OF THE CONTACTORS.
 - DO NOT BREACH CONDUIT WIRING CAPACITY, AND INSTALL ADDITIONAL CONDUIT IF NEEDED TO CONTAIN LINE AND LOAD PAIRS.
 - COMMUNICATION**
 - RS-485 CONNECTIONS SHALL BE OBTAINED USING THE A+/B- TERMINALS USING CAT5E CABLE AND WIRED BACK TO AN OPEN CHAIN OF THE HUB.
 - LABELING**
 - THE LCP-2 SHALL BE LABELED PER POWER SOURCE. THE LABEL SHALL BE APPLIED TO THE FRONT CABINET DOOR.

CONTACTOR SCHEDULE

Contactor	Terminal	Circuit	Load Description
K1	R5 / R6	Phase Voltage	Sales Lights
	R7 / R8	Phase Voltage	
	R9 / R10	Phase Voltage	
K2	R11 / R12	Phase Voltage	Manager Level Lights
	R13 / R14	Phase Voltage	
	R15 / R16	Phase Voltage	
K3	R17 / R18	Phase Voltage	Exterior Parking Lights
	R19 / R20	Phase Voltage	
	R21 / R22	Phase Voltage	
K4	R23 / R24	Phase Voltage	Exterior Signs
	R25 / R26	Phase Voltage	
	R27 / R28	Phase Voltage	
K5	R29 / R30	Phase Voltage	Wall Packs
	R31 / R32	Phase Voltage	
	R33 / R34	Phase Voltage	
K6	R35 / R36	Phase Voltage	Stock Room Lights
	R37 / R38	Phase Voltage	
	R39 / R40	Phase Voltage	

FIRE ALARM COORDINATION PER NFPA 2015

IF THE LCP IS OFF, THEN ALL THE LIGHTS WILL TURN ON. IF THE LCP IS ON AND THE FIRE ALARM TRIGGERS, THEN GRIDPOINT WILL MONITOR THE FIRE ALARM SIGNAL AND TURN LIGHTS ON. NOTE: THE FIRE ALARM SIGNAL NEEDS TO STAY ACTIVE FOR AT LEAST 1 MINUTE.

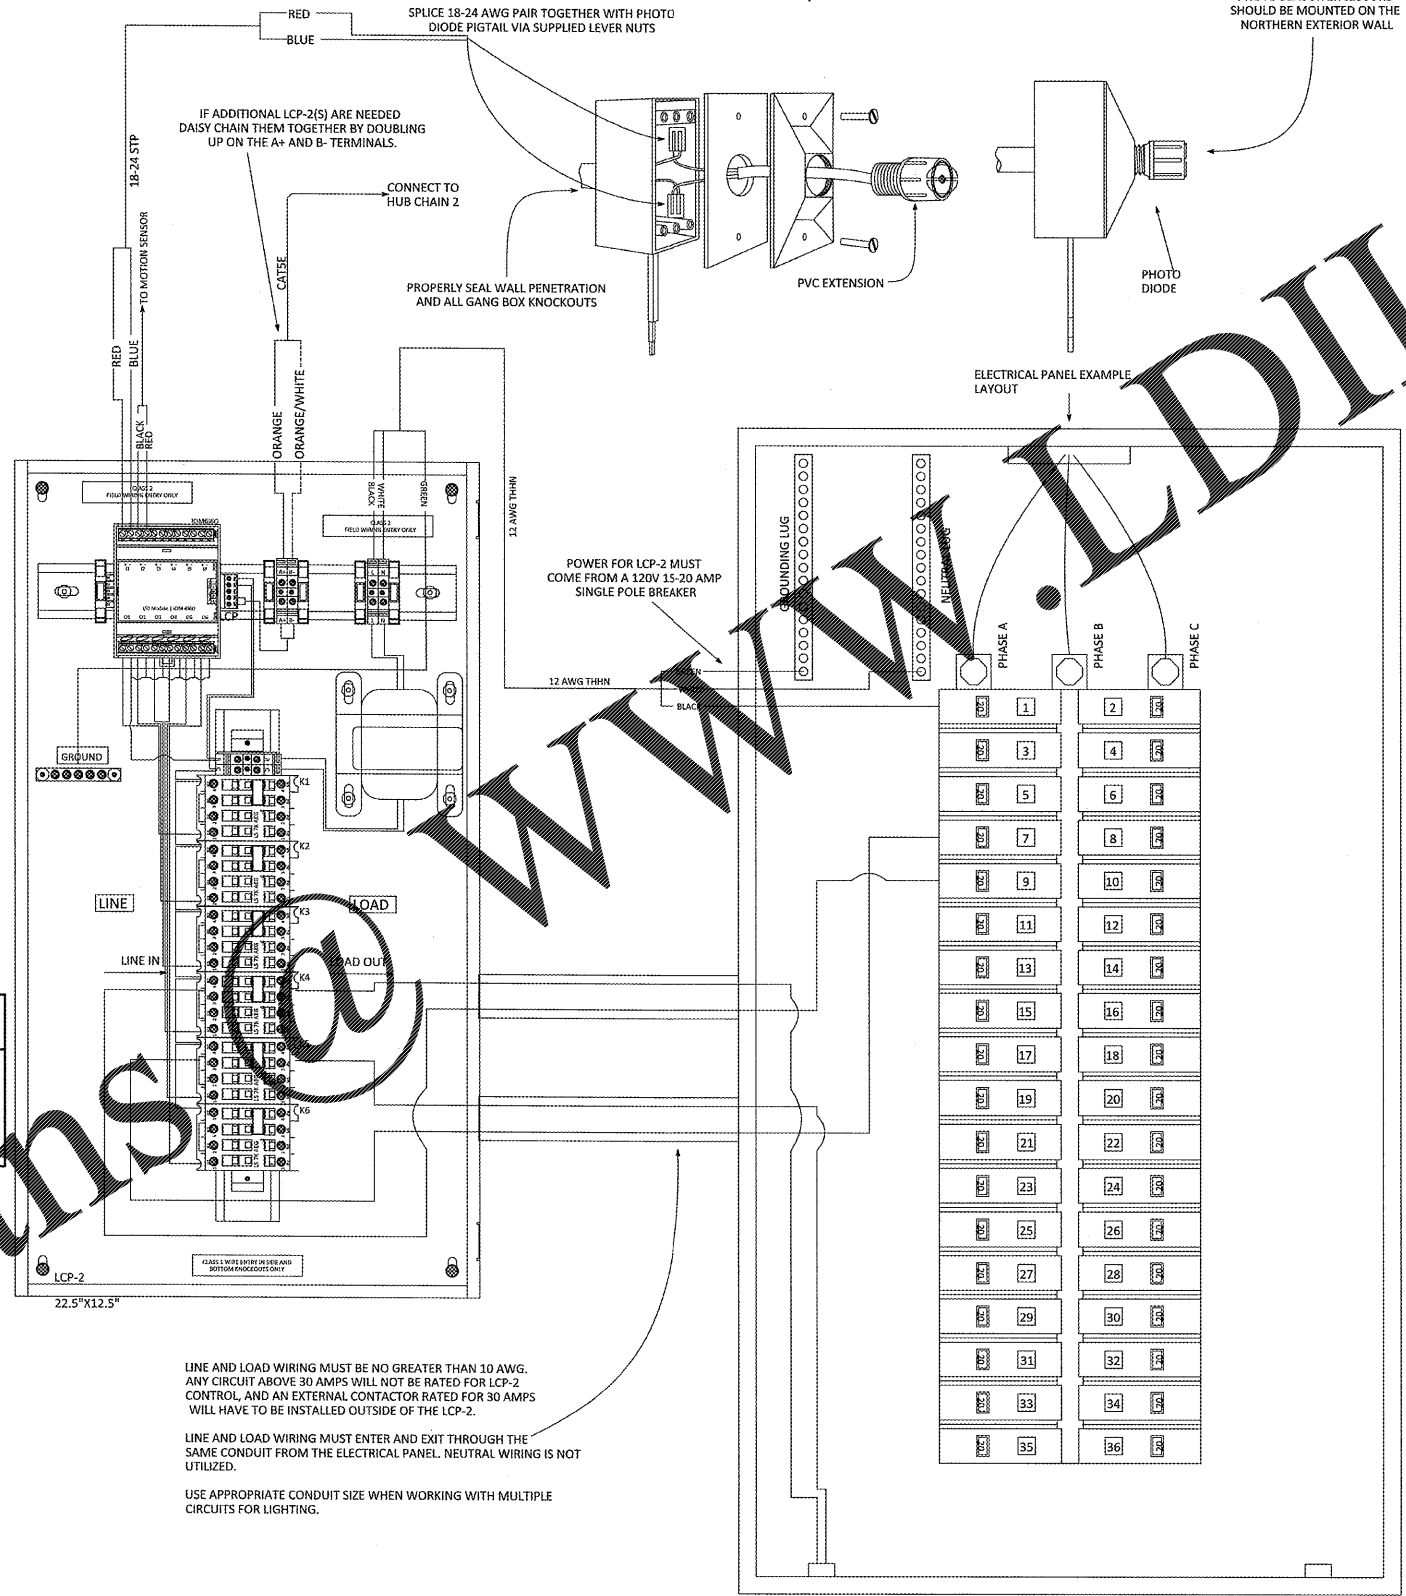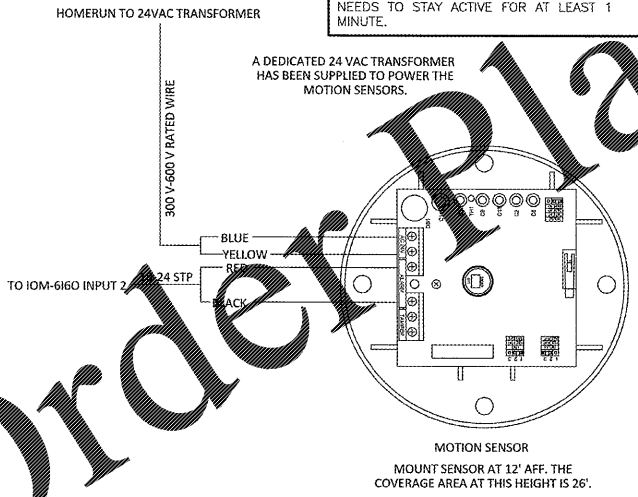

O'REILLY PREFERRED ONE LINE DIAGRAM

GRIDPOINT

5505 VALLEY PARK DRIVE SUITE # 2 - ROANOKE, VA 24019

GRIDPOINT CONTACT

PLEASE CONTACT GRIDPOINT INSTALLATION MANAGEMENT @ 865-800-8908 FOR INSTALLATION CONTACT BASED ON THE STORE LOCATION. EMAIL: SUPPORT@GRIDPOINT.COM

PRINTS ARE FOR:

DESIGN REVIEW PERMIT BIDDING CONSTRUCTION

REVISIONS

DESCRIPTION	DATE	BY
Single motion sensor	05/14/2018	DKD

SHEET TITLE: LIGHTING CONTROL AND MOTION SENSORS

FILE NAME: O'REILLY PREFERRED ONE LINE DIAGRAM

DATE: 2/27/2018 DRAWN BY: DAVID COLWELL

SHEET NO:

EM 1.1

PROJECT: NEW O'REILLY AUTO PARTS STORE
NC STATE HWY 211
SEVEN LAKES, NC

GRIDPOINT EMS

O'Reilly AUTO PARTS

CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

COMM #	4155
DATE:	3-23-18
REVISION DATE:	8-8-18

EM1.1

HA:CREA\0952\01\0952EM1.1_19 Jul 2018 12:46 pm