



WALL MOUNT PLAN VIEW  
LEFT HINGE

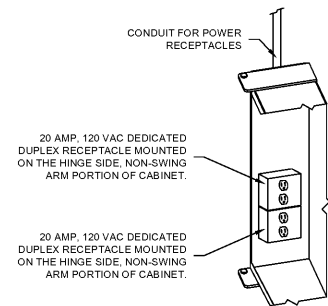


TR CABINET POWER  
BACK PANEL  
HINGED SIDE VIEW

POWER LEFT HINGE

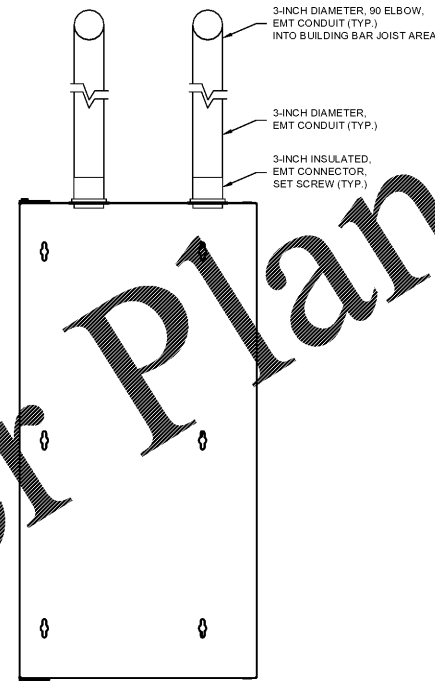


48\"/>

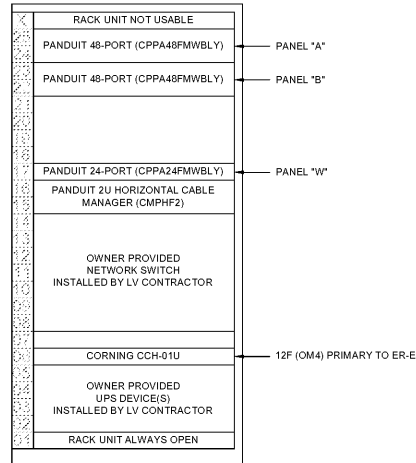

WALL MOUNT ELEVATION  
VIEW - FRONT RAILS

GREAT LAKES WD SERIES  
48-INCH WALL-MOUNT SWING CABINET  
30\"/>

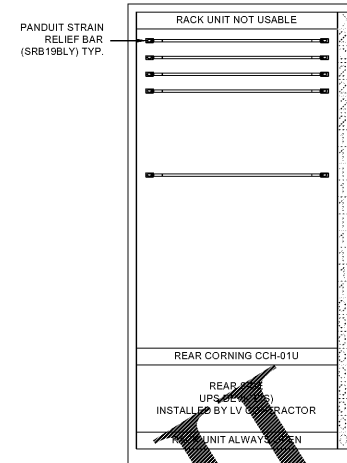


WALL MOUNT ELEVATION  
VIEW - REAR RAILS

**GROUNDING AND BONDING LEGEND:**

- PANDUIT #6 AWG, 1/4-INCH, TWO HOLE, CODE CONDUCTOR, LONG BARREL WITH WINDOW LUG, SLOTTED 45 BENT, FOR RACKS (LCC6-14JAWH-L)
- PANDUIT #6 AWG, 1/2-INCH, TWO HOLE, CODE CONDUCTOR, LONG BARREL WITH WINDOW LUG, STRAIGHT, FOR GUBC (LCC4-12W-L)
- PANDUIT UNIVERSAL BEAM GROUNDING CLAMP (GUBC500-6) FITS ON A WIDE RANGE OF STANDARD (ANGLED) AND WIDE FLANGE (PARALLEL) STRUCTURAL STEEL BEAMS
- PANDUIT GROUNDING STRIP KITS FOR THREADED RAILS (RGS134-1Y)
- BCT BONDING CONDUCTOR FOR TELECOMMUNICATIONS
- GREAT LAKES ENCLOSURE GROUNDING POINTS (MANUFACTURE GROUND WIRE BETWEEN POINTS USING ONE HOLE COMPRESSION LUG)

1. THE CABLE CONTRACTOR SHALL PROVIDE AND INSTALL THE "TELECOMMUNICATIONS GROUNDING SYSTEM" WITHIN TR AS DETAILED IN ABOVE DETAIL AND ASSOCIATED DRAWING SET.
2. THE CABLE CONTRACTOR SHALL PROVIDE AND INSTALL PANDUIT GROUNDING STRIP KIT FOR THREADED RAILS (RGS134-1Y) ON THE FRONT RAILS ON THE ENCLOSURE HINGED SIDE CONTINUING TO THE REAR RAILS OF THE ENCLOSURE HINGED SIDE.
3. THE CABLE CONTRACTOR SHALL PROVIDE AND INSTALL THE "BONDING CONDUCTOR FOR TELECOMMUNICATIONS" (BCT). THE BCT SHALL BE A MINIMUM #6 AWG COPPER CABLE WITH A "GREEN" INSULATING JACKET. THE BCT SHALL BE INSTALLED FROM THE NEAREST BUILDING STEEL TO THE FRONT RAILS OF THE CABINET. BONDING OF THE BCT TO BUILDING STEEL SHALL BE MADE WITH A PANDUIT UNIVERSAL BEAM CLAMP (GUBC500-6) AND A TWO-HOLE COMPRESSION LUG PLACED ON TOP OF THE BEAM CLAMP. AT THE BONDING LOCATION ON BUILDING ON THE PAINT SHALL BE REMOVED AND THE APPROPRIATE ANTI-OXIDANT COMPOUND APPLIED. AT THE ENCLOSURE BONDING LOCATION ON THE FRONT RAILS AT THE TOP, BONDING OF THE GROUND STRIP AND RAILS OF THE ENCLOSURE SHALL BE MADE WITH A TWO-HOLE COMPRESSION LUG. ALL COMPONENTS SHALL BE LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY.
4. THE CABLE CONTRACTOR SHALL PROVIDE AND INSTALL A SEPARATE "BONDING CONDUCTOR" FROM THE ENCLOSURE REAR RACK RAILS TO THE MANUFACTURE PROVIDED GROUNDING POINT ON THE SIDE PANEL OF THE ENCLOSURE. THE BC SHALL BE A #6 AWG COPPER CABLE WITH A "GREEN" INSULATING JACKET. THE BONDING LOCATION ON THE ENCLOSURE REAR RAIL SHALL BE MADE WITH A TWO-HOLE COMPRESSION LUG. THE BONDING LOCATION ON THE ENCLOSURE SIDE PANEL SHALL BE MADE WITH A #6 BARREL VINYL INSULATED RING TONGUE OR EQUIVALENT. ALL COMPONENTS SHALL BE LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY.

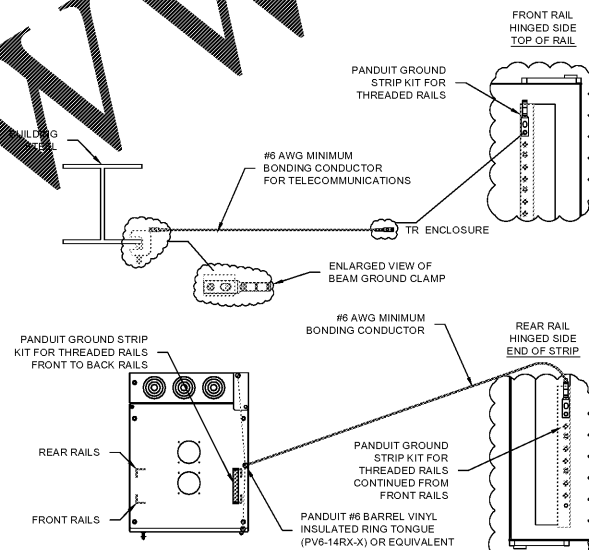

- SHEET NOTES:**
1. GREAT LAKES GL48WD ENCLOSURE SHALL BE MOUNTED TO THE WALL.....
  2. 3/4 INCH FIRE RETARDANT PLYWOOD BACKBOARD SHALL BE INSTALLED TO SUPPORT AT LEAST 350 lbs.
  3. PAINT THE BACKBOARD WITH WHITE FIRE RETARDANT PAINT. DO NOT PAINT OVER THE MANUFACTURERS "FIRE RETARDANT STAMP". THE FIRE RETARDANT STAMP MUST BE VISIBLE.
  4. THE GREAT LAKES ENCLOSURE SHALL BE INSTALLED WITH A LEFT HINGE DOOR OPENING.
  5. PROVIDE AND INSTALL GREAT LAKES 2 FAN UNIT ASSEMBLY, 150 CFM, 115VAC (7217WS) AND MOUNT FAN ON TOP SIDE OF CABINET. PROVIDE FOUR FAN FILTERS (FFK1). EXTRA FAN FILTERS TO REMAIN IN CABINET FOR FUTURE USE.
  6. FRONT RAILS SHALL BE PLACED 6" FROM FRONT EDGE OF THE CABINET ENCLOSURE. REAR RAILS SHALL BE PLACED 12" FROM THE FRONT EDGE OF THE CABINET ENCLOSURE.
  7. REFER TO THE BONDING & GROUNDING SCHEMATIC FOR DETAILS ON ENCLOSURE GROUNDING REQUIREMENTS.
  8. TWO (2) 3-INCH EMT CONDUITS WITH 3-INCH CONNECTORS SHALL BE ATTACHED TO THE KNOCK-OUTS ON THE ENCLOSURE. EXTEND UP TO THE BUILDING BAR JOIST, AND BE USED AS LOW VOLTAGE CABLE ENTRIES INTO THE ENCLOSURE. USE FIRE-STOP PUTTY TO SEAL CONDUITS AT COMPLETION OF PROJECT.
  9. LOW VOLTAGE CABLE SERVICE LOOP SLACK SHALL BE NEATLY COILED (USING VELCRO) AND ATTACHED AT THE BUILDING BAR JOIST.
  10. PROVIDE AND INSTALL ALL PANDUIT COMPONENTS AS SHOWN ON THE DRAWING. ALL PANDUIT PATCH PANELS REQUIRE A PANDUIT STRAIN RELIEF BAR FOR CABLE SUPPORT, MANAGEMENT AND PROPER BEND RADIUS PROTECTION.
  11. THE NEW CORNING 12F MULTIMODE OM4 FIBER CABLES SHALL BE HOUSED IN A 1RU CLOSET CONNECTOR HOUSING (CCH-01U). THE MULTIMODE FIBER STRANDS SHALL BE TERMINATED USING CORNING LC UNICAM CONNECTORS (95-050-99-X) HOUSED ON A CORNING 12 FIBER STANDARD LC PANEL (CCH-CP-12-E4). THE PRIMARY STANDARD LC PANEL SHALL BE LOCATED IN POSITION "A" AND THE SECONDARY STANDARD LC PANEL SHALL BE LOCATED IN POSITION "B".
  12. PROVIDE AND INSTALL THE REQUIRED QUANTITY, LENGTH AND COLOR OF PATCH CORDS AND FIBER JUMPERS. COORDINATE PATCHING WITH THE KROGER PROJECT TEAM.
  13. THE OWNER PROVIDED UPS DEVICE(S) SHALL HAVE THE MOUNTING EARS LOCATED IN THE MIDDLE SLOTS OF THE DEVICE (FOUR TOTAL) TO MOUNT THE UPS DEVICE TO BOTH THE FRONT AND BACK RAILS OF THE ENCLOSURE. THE BOTTOM RACK UNIT SHALL BE LEFT OPEN.
  14. THE CORNING CLOSET CONNECTOR HOUSING SHALL HAVE THE MOUNTING EARS LOCATED IN THE MIDDLE SLOT FACING BACKWARDS TO MOUNT THE CLOSET CONNECTOR HOUSING TO THE BACK RAILS OF THE ENCLOSURE.
  15. THE OWNER PROVIDED HP SWITCH(ES) SHALL HAVE THE MOUNTING EARS LOCATED ON THE FRONT MOUNTING SLOT OF THE SWITCH(ES) TO MOUNT THE SWITCH(ES) TO THE FRONT RAIL OF THE ENCLOSURE.
  16. THE ELECTRICAL CONTRACTOR WILL BE RESPONSIBLE FOR ALL POWER CIRCUIT REQUIREMENTS INTO THE CABINET. POWER SHALL BE LOCATED WITHIN THE ENCLOSURE AS DETAILED ON THE DRAWING.

MID-ATLANTIC COMMOT  
(NEW) ARTISAN  
INFRASTRUCTURE SOLUTIONS

NEW STORE IFB  
R-543  
MERCURY BLVD.  
HAMPTON, VA.

11/1/2018

104,824 98"

R-543  
T4.4

Order Plans

WWW.LDOnline.com