

**Enclosed Safety Switches  
General Duty Safety Switches**

**Table 9: Fusible Safety Switch Short Circuit Current Rating**

Fuse Class	UL Listed Short Circuit Rating
Plug	10 kA
H, K	10 kA
J <sup>1</sup> , R	100 kA
T <sup>2</sup>	100 kA

<sup>1</sup> Only applicable to 200-600 A except D325NT, D325NTR, D326NT and D326NTR.  
<sup>2</sup> Only applicable to D325NT, D325NTR, D326NT, D326NTR, T327N and T327NR.

**Table 10: Non-Fusible Safety Switch Short Circuit Current Rating**

Fuse Class or Circuit Breaker Type <sup>1</sup>	UL Listed Short Circuit Rating
Any Brand Circuit Breaker	10 kA
H or J PowerPact Circuit Breaker	Up to 65 kA <sup>2</sup>
H, K	10 kA
J, R	100 kA <sup>3</sup>
T	100 kA <sup>4</sup>

<sup>1</sup> Ampere rating of fuse or circuit breaker not to exceed switch ampere ratings.  
<sup>2</sup> Only applicable to DU324 and DU324NRB. HD, JD = 25 kA maximum.  
<sup>3</sup> SCCR = 50 kA, applicable to DU222RB, DU322 and DU322RB.  
<sup>4</sup> Only applicable to DU323, DU323RB, DU325 and DU325c.

**Standards**

General duty safety switches are manufactured in accordance with these standards:

- UL 98, Standard for Enclosed and Dead Front Switches. UL Listed File E2875
- NEMA Standards Publication KS1, Enclosed Switches
- Federal Specifications WS-865c for Type NDS (Type 1) and Type LD (Type 3R)

**Table 11: Terminal Lug Data<sup>1</sup>**

Ampere Rating	Conductors Per Phase	Wire Range Wire Bending Space Per NEC Table 312.6 AWG/kcmil	Lug Wire Range AWG/kcmil
30 <sup>2</sup>	1	12-8 (Al) or 14-8 (Cu)	12-6 (Al) or 14-8 (Cu)
30		12-6 (Al) or 14-6 (Cu)	12-6 (Al) or 14-8 (Cu)
60	1	12-3 (Al) or 14-3 (Cu)	12-2 (Al) or 14-2 (Cu)
100	1	12-1 (Al) or 14-1 (Cu)	12-1/0 (Al) or 14-1/0 (Cu)
200	1	6-250 (Al/Cu)	6-300 (Al/Cu)
400 Type 1	1 or 2	1/0-600 (Al/Cu) or 1/0-300 (Al/Cu)	(1) 1/0-600 (Al/Cu) or (2) 1/0-300 (Al/Cu)
400 Type 3R	2	1/0-250 (Al/Cu)	(1) 1/0-600 (Al/Cu) or (2) 1/0-250 (Al/Cu)
600	2	4-500 (Al/Cu)	4-800 (Al/Cu)
800	3	3/0-500 (Al/Cu)	3/0-500 (Al/Cu)

<sup>1</sup> 30-100 A switches suitable for 60°C (140°F) or 75°C (167°F) conductors. 200-800 A switches suitable for 75°C (167°F) conductors.  
<sup>2</sup> Light duty switches only.

**Heavy Duty Enclosed Safety Switches General Information**

**Table 44: Terminal Lug Data<sup>1</sup>**



Rating (A)	Wires Per Phase and Neutral	Wire Range Wire Bending Space Per NEC Table 312.6 AWG/kcmil	Lug Wire Range AWG/kcmil	Optional <sup>2</sup> Versa-Crimp <sup>™</sup> Compression Lug Field-Installed	Optional Copper Only Versa-Crimp <sup>™</sup> Compression Lug Field-Installed <sup>3</sup>
30	1	12-8 (Al) or 14-8 (Cu)	12-6 (Al) or 14-2 (Cu)		C10-14, D8-14, or E5-14
60 <sup>1</sup>	2	12-3 (Al) or 14-3 (Cu)	12-2 (Al) or 14-2 (Cu)		C10-14, D8-14, or E5-14
100 <sup>1</sup>	1	12-1 (Al) or 14-1 (Cu)	12-1/0 (Al) or 14-1/0 (Cu)	VCEL0212H1	VCEL0214E1
200 <sup>1</sup>	1	6-250 (Al/Cu)	6-300 (Al/Cu)	VCEL020512H1	VCEL020516H1
400 <sup>1</sup>	1 or 2	1/0-750 (Al/Cu) or 1/0-500 (Al/Cu)	1/0-600 (Al/Cu) or 1/0-300 (Al/Cu)	VCEL020512H1 <sup>4</sup> or VCEL020516H1 <sup>5</sup>	VCEL020516H1 <sup>5</sup> or VCEL020512H1 <sup>4</sup>
600	2	3/0-500 (Al/Cu)	3/0-500 (Al/Cu)	VCEL020512H1	VCEL020512H1
800	3	3/0-750 (Al/Cu)	3/0-750 (Al/Cu)	H12XRE2 11	
1200	4	3/0-750 (Al/Cu)	3/0-750 (Al/Cu)	H12XRE2 12	

<sup>1</sup> 30-100 A switches suitable for 60°C (140°F) or 75°C (167°F) conductors. 200-1200 A switches suitable for 75°C (167°F) conductors.  
<sup>2</sup> Hubbell Versa-Crimp<sup>™</sup> unless otherwise noted.  
<sup>3</sup> For Type 1, 123R, 12K and 44XVS stainless steel switches only.  
<sup>4</sup> Order C10-14, D8-14 and E5-14 from Thomas and Betts.  
<sup>5</sup> H100XFA and H100XFA1212 — use 75°C (167°F) copper wire only. #3 AWG copper wire required for 60 A rating.  
<sup>6</sup> H100XFA and H100XFA1212 — use 75°C (167°F) copper wire only. #3 AWG copper wire required for 100 A rating.  
<sup>7</sup> H225XJG and H225XJGA — use 75°C (167°F) copper wire only. Lug wire range is #3 AWG - 250 kcmil. Not UL Listed due to inadequate wire bending space (5/8" (127 mm) on the ON end, 6/16" (102 mm) on the OFF end).  
<sup>8</sup> Maximum wire bending space allows for (1) 800 kcmil or (2) 500 kcmil Al/Cu on Type 44XVS stainless steel and Type 123R, 12K use VCEL020512H1 (Al/Cu) or VCEL020516H1 (Cu) only. Order two PK519RH mounting kits when installing VCEL020512H1 lugs. Only one kit is required on two-pole switches. PK519RH consists of four 5/16-18 (7 mm) Nuts.  
<sup>9</sup> For Type 44XVS stainless steel and Type 123R, 12K use VCEL020512H1 (Al/Cu) or VCEL020516H1 (Cu) only. Order two PK519RH mounting kits when installing VCEL020512H1 or VCEL020516H1 lugs. Only one kit is required on two-pole switches. PK519RH consists of four 5/16-18 (7 mm) Nuts.  
<sup>10</sup> For 800 and 1200 A compression lug kits, see Table 37 on page 34 for additional information.

**GENERAL ELECTRICAL NOTES**


- DRAWINGS ARE DIAGRAMMATIC & ARE NOT TO BE SCALED. SEE THE ARCHITECTURAL PLANS & FIELD VERIFY CONDITIONS FOR DIMENSIONS.
- ALL ELECTRICAL WORK SHALL COMPLY WITH THE EDITION OF NFPA 70-NATIONAL ELECTRIC CODE (NEC) AS NOTED ON THE CODE SUMMARY SHEET.
- ALL WIRING SHALL BE IN CONDUIT, EXCEPT THAT MC-CABLE MAY BE SUBSTITUTED ONLY AS FOLLOWS:
  - MC-CABLE (MAXIMUM CABLE LENGTH OF 10'-0") MAY BE INSTALLED ONLY FOR BRANCH CIRCUIT WIRING TO LIGHT FIXTURES.
  - MC-CABLE (MAXIMUM CABLE LENGTHS SHOWN ON DETAIL 2/E2) MAY BE INSTALLED ONLY ABOVE SLAB AND ONLY AT LOCATIONS INDICATED ON SHEET E2.
- FEEDER CONDUIT SHALL BE IMC OR RGS ABOVE GRADE & PVC BELOW GRADE WITH IMC OR RGS ELLS & RISERS. INTERIOR BRANCH CIRCUIT CONDUIT SHALL BE ELECTRICAL METALLIC TUBING. EXTERIOR BRANCH CIRCUIT CONDUIT SHALL BE PVC BELOW GRADE WITH IMC OR RIGID GALVANIZED STEEL CONDUIT CONTINUING ABOVE GRADE. (SPEC 26 05 33)
- COORDINATE ALL WORK WITH OTHER TRADES TO AVOID CONFLICTS. COORDINATION DOES NOT MEAN IT WAS HERE FIRST.
- ALL WIRING IN FINISHED SPACES SHALL BE CONCEALED, UNLESS NOTED OTHERWISE.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING A COMPLETE & FUNCTIONAL SYSTEM IN ACCORDANCE WITH THE INTENT OF THE PLANS, WHETHER OR NOT EVERY ELEMENT THEREOF IS SPECIFICALLY CALLED OUT.
- COORDINATE ALL EQUIPMENT ROUGH-IN CONNECTION REQUIREMENTS.
- ALL OUTLET BOXES SHALL BE METALLIC. (SPEC 26 05 34)
- ALL CAULKING ON BUILDING PENETRATIONS SHALL BE ELASTOMERIC POLYURETHANE (NO EXCEPTIONS), EQUAL TO "YULKEM" 1115. ANY CONTRACTOR WHO USES SILICONE OR ANY OTHER CAULKING WILL BE REQUIRED TO REMOVE & REPLACE WITH ELASTOMERIC POLYURETHANE.
- RECEPTABLES INSTALLED IN RESTROOMS SHALL BE GFCI TYPE OR SHALL BE PROTECTED BY A GFI DEVICE.
- ALL DEVICES SHALL BE IVORY & SHALL BE EQUAL TO THE FOLLOWING:
  - SINGLE POLE SWITCHES ---
  - THREE-WAY SWITCHES ---
  - DUPLEX RECEPTACLE --- (SPEC 26 27 26)
  - GFCI DUPLEX RECEPTACLE ---
  - ISO. GRD. RECEPTABLES ---
- USE DEVICE PLATES MANUFACTURED BY THE DEVICE MANUFACTURER. (SPEC 26 27 26)
- FEEDER & BRANCH CIRCUIT CONDUCTORS SHALL BE COPPER, STRANDED, 600V THHN/THWN INSULATION. EXCEPTION: WIRE SIZES #10 AWG & SMALLER SHALL BE SOLID. (SPEC 26 05 19)
- CONTRACTOR SHALL PROVIDE A TYPED CIRCUIT DIRECTORY FOR ALL PANELS. (SPEC 26 05 53)
- CONTRACTOR SHALL PROVIDE A ONE(1) YEAR WARRANTY ON ALL WORK PERFORMED.
- CONTRACTOR SHALL PROVIDE NEW WORKING LAMPS IN ALL LIGHT FIXTURES AT JOB COMPLETION.
- CONTRACTOR SHALL COORDINATE WITH & SHALL INCLUDE ALL FEES FOR THE SERVING "ELECTRIC UTILITY CO." TO PROVIDE ELECTRIC SERVICE AS SHOWN. CONTRACTOR SHALL ALSO INCLUDE ALL FEES FOR THE "SERVING PHONE COMPANY" TO INSTALL NO LESS THAN 10 PAIR CABLE TO BUILDING.
- CONTRACTOR SHALL ARRANGE FOR & INCLUDE ALL PERMITS & FEES FOR HIS SCOPE OF WORK.
- CONTROL WIRING BY HVAC CONTRACTOR. FINAL CONNECTIONS BY HVAC CONTRACTOR. SEE SHEET M1.
- APPROVED MANUFACTURERS:
 

<b>A. PANELBOARDS &amp; SAFETY SWITCHES (DISCONNECTS):</b>	<b>B. DEVICES:</b>	<b>C. FLOOR BOXES:</b>
--- SQUARE D <sup>1</sup>	--- 'HUBBELL'	--- 'STEEL CITY'
--- 'G.E.'	--- 'LEVITON'	--- 'APPLETON'
--- 'SEIMENS'	--- 'PASS & SEYMOUR'	--- 'HUBBELL'
--- 'CUTLER-HAMMER'		
- MULTIWIRE BRANCH CIRCUITS WITH A "SHARED NEUTRAL" ARE NOT ALLOWED FOR SINGLE PHASE CIRCUITS.

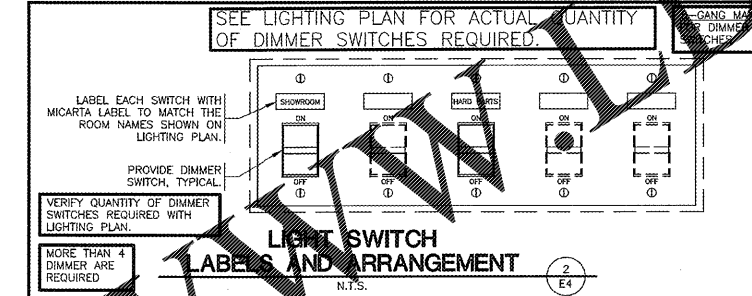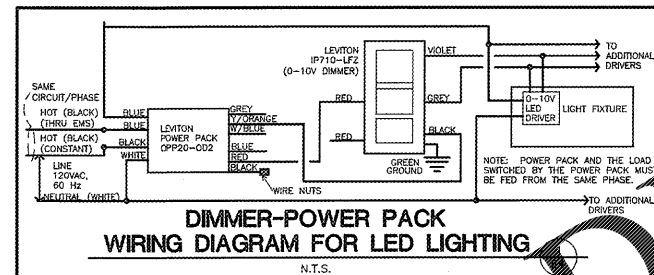

**ELECTRICAL SYMBOL LEGEND & ABBREVIATIONS**

- ⊠ SINGLE POLE SWITCH
- ⊠ TWO POLE SWITCH
- ⊠ THREE-WAY SWITCH
- ⊠ MOTOR STARTING SWITCH WITH PILOT LIGHT
- ⊠ CLASS 1, DIVISION 1 HAZARDOUS LOCATION RATED SWITCH ASSEMBLY
- ⊠ WALL MOUNTED OCCUPANCY SENSOR EQUAL TO "SENSORSWICH WSK D IV"
- ⊠ WALL MOUNTED OCCUPANCY SENSOR EQUAL TO "SENSORSWICH WSK 2P FAN-IV" CONTRACTOR SHALL DISABLE MANUAL SWITCHES PER MANUFACTURERS INSTRUCTIONS. SWITCH SHALL BE FULLY AUTOMATIC.
- ⊠ FAN SPEED SWITCH (SUPPLIED BY HVAC CONTRACTOR / INSTALLED BY ELECTRICAL CONTRACTOR)
- ⊠ 0-10V LED DIMMER SWITCH, EQUAL TO "LEVITON, IP710-LFZ". SEE DETAILS THIS SHEET (5-GANG MAX)
- ⊠ LEVITON POWER PACK OP20-002
- ⊠ SINGLE RECEPTACLE
- ⊠ DUPLEX RECEPTACLE
- ⊠ ISOLATED GROUND DUPLEX RECEPTACLE. DEVICES AND COVERPLATE SHALL BE ORANGE. SEE DETAIL 1/E3
- ⊠ DUPLEX RECEPTACLE. DEVICES AND COVERPLATE SHALL BE RED
- ⊠ ISOLATED GROUND DUPLEX RECEPTACLE. DEVICES AND COVERPLATE SHALL BE RED
- ⊠ QUADPLEX RECEPTACLE (TWO ISO. GRD. DUPLEX RECEPTABLES IN ONE 2-GANG BOX UNDER A SINGLE COVERPLATE)
- ⊠ EXISTING UNPOWERED DUPLEX RECEPTACLE
- ⊠ ISOLATED GROUND QUADPLEX RECEPTACLE (TWO ISO. GRD. DUPLEX RECEPTABLES IN ONE 2-GANG BOX UNDER A SINGLE COVERPLATE. DEVICES AND COVERPLATE SHALL BE RED)
- ⊠ QUADPLEX RECEPTACLE (CIRCUIT TO BE WIRED THRU OCCUPANCY SENSOR) INSTALL A PERMANENT LABEL ON EACH OUTLET STATING "SENSOR CONTROLLED OUTLET". SEE DETAIL ON SHEET
- ⊠ ONE-COUNTER GFCI (GROUND FAULT CIRCUIT INTERRUPTING) DUPLEX RECEPTACLE
- ⊠ WEATHER PROOF GFCI (GROUND FAULT CIRCUIT INTERRUPTING) DUPLEX RECEPTACLE. COVER TO PROVIDE WEATHER PROOF PROTECTION WITH CORD AND PLUG IN USE
- ⊠ TELE-POWER POLE
- ⊠ JUNCTION BOX
- ⊠ REMOTE PHOTO CONTROL
- ⊠ COMPUTER DATA OUTLET BOX.
- ⊠ TELEPHONE OUTLET BOX.
- ⊠ TELEPHONE OUTLET FLOOR BOX. SEE DETAIL 4/E2.
- ⊠ 4" SQUARE STEEL BOX MOUNTED FLUSH ON FLOOR W/QUADPLEX RECEPTACLE (SEE ABOVE RECEPTACLE DESCRIPTION). SEE DETAIL 4/E2 FOR INSTALLATION OF BOX
- ⊠ 4" SQUARE STEEL BOX MOUNTED FLUSH ON FLOOR W/QUADPLEX ISOLATED GROUND RECEPTACLE (SEE ABOVE ISOLATED GROUND RECEPTACLE DESCRIPTION). SEE DETAIL 4/E2 FOR INSTALLATION OF BOX
- ⊠ 4" SQUARE STEEL BOX MOUNTED FLUSH ON FLOOR W/QUADPLEX ISOLATED GROUND RECEPTACLE (SEE ABOVE ISOLATED GROUND RECEPTACLE DESCRIPTION). SEE DETAIL 4/E2 FOR INSTALLATION OF BOX. DEVICES AND COVERPLATE SHALL BE RED.
- ⊠ 2" x 4" RECTANGULAR STEEL BOX MOUNTED FLUSH ON FLOOR W/DUPLEX RECEPTACLE (SEE ABOVE RECEPTACLE DESCRIPTION). SEE DETAIL 4/E2 FOR INSTALLATION OF BOX
- ⊠ NEMA 15-30R - SPECIAL RECEPTACLE
- ⊠ MOTOR
- ⊠ FUSED DISCONNECT (SAFETY) SWITCH W/ SWITCH AMPACITY / FUSE AMPACITY AS INDICATED
- ⊠ NON-FUSED DISCONNECT (SAFETY) SWITCH
- ⊠ POWER OR LIGHTING PANEL W/PANEL DESIGNATION SHOWN ON PLAN (SIZES & MOUNTING INDICATED ON PLANS)
- ⊠ 24 HOUR EGRESS & SECURITY LIGHT, WIRE DIRECT TO ELECTRIC PANEL AHEAD OF ANY LOCAL SWITCHES AND LIGHTING CONTROL PANEL
- ⊠ WALL/CEILING MOUNTED COMBINATION "EXIT/EMERGENCY" SIGN W/SHADING INDICATING FACES
- ⊠ EMERGENCY LIGHTING FIXTURE WITH BATTERY
- ⊠ FEEDING PANEL AND CIRCUIT NUMBER(S)
- ⊠ NOTE: EQUIPMENT GROUND CONDUCTOR NOT SHOWN
- ⊠ CIRCUIT CONDUCTORS
- ⊠ GROUNDING CIRCUIT CONDUCTOR (OR NEUTRAL)
- ⊠ MOTION DETECTOR - SEE EM SHEETS FOR MORE INFORMATION
- ⊠ OCCUPANCY SENSOR EQUAL TO "LEVITON, OSC20-MAW" WITH POWER PACK

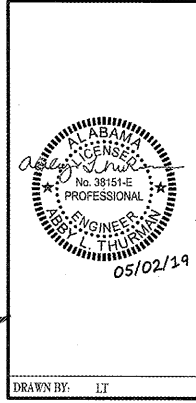

**CRAIG A. SCHNEIDER, AIA**  
ARCHITECT  
1736 East Sunshine, Suite 417  
Springfield, Missouri 65804  
Tel: 417.862.2658  
Fax: 417.862.2655  
e-mail: architect@electricplans.com

**NEW O'REILLY AUTO PARTS STORE**  
US HWY 43  
WINFIELD, AL  
**ELECTRICAL NOTES**

**O'Reilly AUTO PARTS**  
CORPORATE OFFICES  
233 SOUTH PATTERSON  
SPRINGFIELD, MISSOURI 65802  
(417) 862-2674 TELEPHONE

COMM # 4308  
DATE: 05-03-19  
REVISION  
DATE:

