RESPONSIBILITY SCHEDULE & NOTES

SCOPE OF WORK	EXISTING	FURNISH: LANDLORD	FURNISH: TENANT	FURNISH: TENANT CONTRACTOR	INSTALL: LANDLORD	INSTALL: TENANT	INSTALL: TENANT CONTRACTOR	NOT APPLICABLE	REMARKS
DIVISION I: GENERAL DATA									
BARRICADE				•			•		
BARRICADE GRAPHICS			•			•		•	PER LEASE
DIVISION II: SITE CONSTRUCTION									
DEMOLITION				•			•		
DIVISION III: CONCRETE									
CONCRETE PATCHING				•			•		CREATE SMOOTH LEVEL SURFACE TO ACCEPT NEW FLOORING
DIVISION IV: MASONRY									
MASONRY				•			•		ALL MASONRY WALL TO REMAIN. ALERT PROJECT MANAGER OF ANY DISCREPANCY
DIVISION V: METALS									
STRUCTURAL METAL FRAMING				•			•		
LIGHT GAUGE METAL FRAMING				•			•		
UNISTRUT				•			•		FOR SUSPENSION OF ALL HANGING ITEMS
EXPANSION JOINTS								•	
BRAKE METAL				•			•		SEE FINISH SCHEDULE
DIVISION VI: WOOD & PLASTICS									
ROUGH FRAMING				•			•		LAYOUT, MATERIALS, FURRING, BLOCKING, & ETC.
FINISH CARPENTRY				•			•		
WOOD CASED OPENINGS				•			•		
WOOD BASE									SEE A3.0 FOR RESPONSIBILITY
DIVISION VII: THERMAL & MOISTURE PROTECTION									
WATERPROOF MEMBRANE	•			•			•		G.C. TO VERIFY THE INTEGRITY
BATT INSULATION				•			•		
ROOFING PENETRATIONS	•			•			•		PER LL REQUIREMENTS
DIVISION VIII: DOORS & WINDOWS									
METAL DOORS & FRAMES	•			•			•		REFER TO DOOR SCHEDULE
DOOR HARDWARE	•			•			•		REFER TO DOOR SCHEDULE
FITTING ROOM DOORS, FRAME & HARDWARE			•				•		REFER TO DOOR SCHEDULE
ACCESS PANELS				•			•		
ROLLING GRILLE BRACING, SWITCHES & LOCKS			•			•			TENANT G.C. COORDINATE INSTALLATION
STOREFRONT GLAZING, HEADS & BASE				•			•		
EXIT DOOR PANIC HARDWARE			•			•			REFER TO A1.0 & E4.1. G.C. TO PROVIDE POWER ONLY
DIVISION IX: FINISHES									
ACOUSTICAL CEILING								•	
GYPSUM BOARD, FRAMING AND ACCESSORIES				•			•		
REVERSE IMAGE VINYL GRAPHICS			•			•			COORDINATE W/TENANT VENDOR
DPC FLOORING			•			•			
TILE-SETTING MATERIALS & ACCESSORIES - PORCELAIN TILE									SEE SHEET A3.0
WALL COVERINGS			•				•		SEE SHEET A3.0
VINYL BASE				•			•		NON-SALES AREA
PANELS, WOOD TRIM, STOREFRONT WOOD			•				•		STOREFRONT/STRUCTURAL WINDOWS
PAINT & PAINTING				•			•		
WALL & CORNER GUARDS				•			•		NON-SALES AREA
UNFINISHED WOOD CORNER MOLDING			•				•		SALES FLOOR COLUMNS
WALK-OFF MAT								•	
WINDOW SECURITY FILM								•	
DIVISION X: SPECIALTIES									
TOILET ROOM ACCESSORIES	•			•			•		SEE A1.4 FOR ACCESSORIES. G.C. TO CLEAN, REFURBISH AND REPLACE DAMAGED/MISSING ACCESSORIES
STOREFRONT SIGN			•			•			PROVIDE PANEL & BLOCKING FOR SIGN INSTALLER & ELEC. CONN. COORDINATED BY G.C.
STOCK ROOM SHELVING SYSTEMS / LADDER SYS.			•				•		
FITTING ROOM BENCH TOP & COAT HOOKS			•				•		
MIRRORS (TOILET ROOM)	•			•			•		G.C. TO CLEAN AND REFURBISH TO LIKE NEW CONDITION
MIRRORS (FITTING ROOM)			•				•		
BANNER TRACK SYSTEM			•				•		
ALU SYSTEM			•				•		
BACKURAP, DENIM, FITTING ROOM GRAPHICS			•			•			COORDINATED BY G.C.
DIVISION XI: EQUIPMENT									
DIVISION XII: FURNISHINGS									
PERIMETER WALL RAIL SYSTEM			•				•		SEE A-5.0 FOR ADDITIONAL INFORMATION
PERIMETER WALL DISPLAYS			•				•		"C" SHELVES, GRID FRAMES, MIRRORS, CASEWORK AND FLOOR FIXTURES
CASH WRAP, BACKURAP MILLWORK			•				•		
MANAGER'S DESK/ CHAIR/ FILE CABINET & SAFE			•				•		
DIVISION XIII: SPECIAL CONSTRUCTION									
DIVISION XIV: CONVEYING SYSTEMS									
DIVISION XV: MECHANICAL									
SPRINKLER PIPING & HEADS	•			•			•		RE-WORK AS REQUIRED
FIRE EXTINGUISHER(S)				•			•		AS REQUIRED BY LOCAL CODE
PLUMBING (SAN, DCW, VENT STUB-IN)	•			•			•		
PLUMBING FIXTURES	•			•			•		REUSE EXISTING IF CODE COMPLIANT
DIFFUSERS & GRILLES				•			•		REFER TO MECHANICAL DRAWINGS
MECHANICAL EQUIPMENT				•			•		NEW RTU ON NEW DUNNAGE. SEE MECHANICAL PLANS FOR MORE INFO.
AIR CURTAIN								•	
FIRE DAMPERS								•	WALL AND/OR COMBINATION SMOKE/FIRE DAMPERS
TOILET EXHAUST FAN, DUCTWORK, ROOF CAP	•			•			•		REUSE EXISTING EXHAUST DUCT, REPLACE EXHAUST FAN
AIR BALANCE REPORT				•					
TEMPERATURE CONTROL SYSTEM				•			•		
SMOKE EVAC & CONTROLS								•	
DIVISION XVI: ELECTRICAL									
MAIN SERVICE CONDUIT	•			•			•		VERIFY W/ RISER AND IN FIELD. G.C. TO PROVIDE AND INSTALL IF NOT EXISTING
MAIN SERVICE WIRING	•			•			•		VERIFY W/ RISER AND IN FIELD. G.C. TO PROVIDE AND INSTALL IF NOT EXISTING
FEEDER CABLE	•			•			•		
CONDUIT, WIRING & DEVICES				•			•		
LIGHTING FIXTURES /LAMPS			•				•		
TELEPHONE CONDUIT & PULL WIRE				•			•		
TIME CLOCK				•			•		
DATA CONDUIT W/ PULL STRING				•			•		SEE SHEET E-4.0
DATA CABLING			•			•			CONSTRUCTION PROJECT MANAGER COORDINATES
CASH WRAP CABLE & RELATED CONNECTORS			•			•			
CASH WRAP CONDUIT & TERMINATION				•			•		
REGISTERS, COMPUTERS, PRINTERS, ETC.			•			•			
TENANT ELECTRICAL PANELS	•			•			•		MODIFY PER NEW WORK
TENANT ELECTRICAL TRANSFORMERS	•			•			•		
POWER TO SIGN				•			•		EXISTING CIRCUIT
FIRE ALARM	•			•			•		COORDINATE W/ LANDLORD & LOCAL CODES. MODIFY PER NEW WORK.
CCTV			•			•			(1) CAMERA AT ENTRY
LIGHTHAUS SYSTEMS				•			•		TO REMAIN IF EXISTING. RELOCATE IF EXISTING. NO NEW LIGHTHAUS
BURGLAR ALARM								•	
AUDIO SYSTEM			•			•			
WIFI DSL LINE			•			•			CONDUIT WITH PULL WIRE BY CONTRACTOR, COORDINATED BY CONSTRUCTION PROJECT MANAGER
BLACK PLUGMOLD/ACCESSORIES			•				•		SEE DETAIL A1.1
CARBON MONOXIDE AND GAS DETECTORS				•			•		FURNISHED AND INSTALLED BY G.C.

1. TENANT'S CONTRACTOR IS RESPONSIBLE FOR THE SCOPE OF WORK AS INDICATED IN THE DRAWINGS UNLESS OTHERWISE NOTED IN THE RESPONSIBILITY SCHEDULE ABOVE. ANY QUESTIONS OR DISCREPANCIES SHOULD BE BROUGHT TO TENANT PROJECT CONSTRUCTION MANAGER'S ATTENTION PRIOR TO SUBMISSION OF A BID.
2. ALL G-SHEETS ARE APPLICABLE TO ALL TRADES AND VENDORS.
3. TENANT'S CONTRACTOR IS TO PROVIDE SCHEDULE AND PROJECT CALENDAR TO TENANT'S PROJECT CONSTRUCTION MANAGER TO SHARE WITH OTHER VENDORS (E.G.-FIXTURE SUPPLIER, FLOORING SUPPLIER/INSTALLER, SIGNAGE MANUFACTURER, LIGHTING SUPPLIER AND MISCELLANEOUS LOW VOLTAGE INSTALLERS).
4. FOR MATERIALS PROVIDED BY OTHERS, TENANT'S CONTRACTOR IS TO RECEIVE AND IS TO REPORT MISSING ITEMS OR DAMAGES TO TENANT PROJECT CONSTRUCTION MANAGER WITHIN 48 HOURS OF RECEIPT. IF TENANT'S CONTRACTOR FAILS TO DO SO, THEN THE TENANT'S CONTRACTOR IS RESPONSIBLE FOR COSTS RELATED TO REPLACING MISSING OR DAMAGED TENANT FURNISHED MATERIALS.
5. TENANT'S CONTRACTOR IS RESPONSIBLE TO COORDINATE PROPER RECEIPT OF ALL TENANT SUPPLIED ITEMS INCLUDING BUT NOT LIMITED TO HAVING ALL NECESSARY EQUIPMENT FOR OFF-LOADING CARPET FROM DELIVERY TRUCK.
6. TENANT'S CONTRACTOR IS RESPONSIBLE FOR RELOCATING ALL EXISTING FIXTURES THAT ARE TO REMAIN FROM THE TEMPORARY LOCATION BACK TO THE SITE AFTER CONSTRUCTION IS COMPLETE.
7. TENANT IS TO PROVIDE TENANT CONTRACTOR WITH A COPY OF VENDOR ORDER RELEASE PACKAGE. TENANT'S CONTRACTOR TO ENSURE THAT THIS IS MAINTAINED ON SITE BY FIELD SUPERINTENDENT.
8. TENANT'S CONTRACTOR IS TO FURNISH TENANT PROJECT CONSTRUCTION MANAGER WITH AS-BUILT DWGS. REFLECTING ACTUAL CONDITIONS UPON COMPLETION OF JOB.

FOOT LOCKER, INC.

FOOTACTION

AREA SITE PLAN

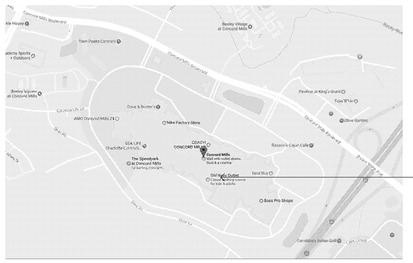

MALL NAME
8111 CONCORD MILLS BLVD.
CONCORD, NC 28027
SPACE # 615B

MALL KEY PLAN

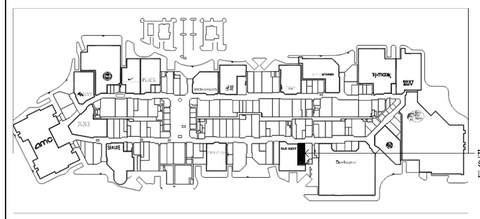

PROJECT DIRECTORY

TENANT
FOOTACTION
FOOTLOCKER INC.
330 WEST 34TH STREET
NEW YORK, NY 10001

PROJECT CONSTRUCTION MANAGER
DEAN ERMIDES
TEL: 954-326-6810
EMAIL: DERMIDES@FOOTLOCKER.COM

FL PROJECT DESIGNER:
RAYMOND CHAN
TEL: 212-720-4671
EMAIL: RCHAN@FOOTLOCKER.COM

SHOPPING CENTER INFORMATION
CONCORD MILLS
8111 CONCORD MILLS BOULEVARD
CONCORD, NC 28027
CONTACT: DALE JOHNSON
TEL: 704-979-5000
EMAIL: DAJOHNSON@SIMON.COM

LANDLORD INFORMATION
SIMON PROPERTIES
225 WEST WASHINGTON STREET
INDIANAPOLIS, IN 46204-3438
CONTACT: MATTHEW WINEBRENNER
TEL: 317-263-7097
EMAIL: MATTHEWWINEBRENNER@SIMON.COM

ARCHITECT
SARGENTI ARCHITECTS
461 FROM ROAD - 2ND FLOOR
PARAMUS, NJ 07652
CONTACT: WESLEY SHORT
TEL: 973-859-9367
EMAIL: WSHORT@SARGARCH.COM

ENGINEER
MPW ENGINEERING, LLC
110 W. 7TH STREET, STE. 600
TULSA, OK. 74119
CONTACT: STEVE KREIDLER, EI
TEL: 918-925-3095
EMAIL: STEVE.KREIDLER@MPWENGINEERING.COM

PLEASE DIRECT ALL INQUIRES TO
PROJECT CONSTRUCTION MANAGER

CODE INFORMATION

APPLICABLE CODES:
ALL WORK DONE UNDER THIS CONTRACT SHALL COMPLY WITH THE PROVISIONS OF THE SPECIFICATIONS, DRAWINGS AND CONSTRUCTION CRITERIA OF THE LANDLORD, AND SHALL SATISFY ALL APPLICABLE CODES, ORDINANCES AND REGULATIONS OF ALL AUTHORITIES HAVING JURISDICTION. ANY MODIFICATIONS TO THE CONTRACT WORK REQUIRED BY SUCH AUTHORITIES SHALL BE PERFORMED BY TENANT'S CONTRACTOR. ALL PERMITS AND LICENSES NECESSARY FOR THE EXECUTION OF THE WORK SHALL BE SECURED AND PAID FOR BY THE TENANT'S CONTRACTOR(S). APPLICABLE CODES INCLUDE, BUT ARE NOT LIMITED TO THE FOLLOWING:

APPLICABLE CODES: (INCLUDING LOCAL AMENDMENTS)

BUILDING CODE:	NORTH CAROLINA STATE BUILDING CODE 2012
MECHANICAL CODE:	NORTH CAROLINA STATE MECHANICAL CODE 2012
ELECTRICAL CODE:	NORTH CAROLINA ELECTRICAL CODE 2014
PLUMBING CODE:	NORTH CAROLINA STATE PLUMBING CODE 2012
FIRE CODE:	NORTH CAROLINA STATE FIRE PREVENTION CODE 2012
ACCESSIBILITY CODE:	ANSI A117.1 - 2009
ENERGY CODE:	NORTH CAROLINA STATE ENERGY CONSERVATION CODE 2012

OCCUPANCY GROUP: M - MERCANTILE

TYPES OF CONSTRUCTION - FIRE RESISTANCE RATING REQUIREMENTS FOR BUILDING ELEMENTS (TABLE 601):

TYPE: II B - FULLY SPRINKLERED
- STRUCTURAL FRAME = 0 HR.
- FLOOR CONSTRUCTION = 0 HR.
- ROOF CONSTRUCTION = 0 HR.
- REQUIRED SEPARATION OF OCCUPANCIES = 0 HR. (TABLE 508.3.3)
- CORRIDOR WALL W/ SPRINKLER SYSTEM = 0 HR. (TABLE 1017.1)
- TENANT SPACE SEPARATIONS = 1 HR.
- STORAGE SEPARATION FROM SALES [FULL SPRINKLER SYSTEM] = 0 HR.

MEANS OF EGRESS: (CHAPTER 10)
MINIMUM EGRESS REQUIREMENTS (TABLE 1004.1.1):
MERCANTILE
AREAS ON OTHER FLOORS = 60 GROSS
BASEMENT AND GRADE FLOOR AREAS = 30 GROSS
STORAGE AND STOCKROOM = 300 GROSS

EGRESS WIDTH PER OCCUPANT SERVED (SECTION: 1005.1)

MERCANTILE: GROUP 'M' - .15" PER PERSON
[W/ SPRINKLER SYSTEM]
DOOR [KFL MAIN] = 72" NET WIDTH (AT ENTRY GRILLES)
DOOR [REAR] = 32" NET WIDTH (AT REAR DOORS)
TOTAL NET EGRESS DOOR WIDTH =104" [PROVIDED]

OCCUPANT LOAD:
SALES: 3,205 SF. / 30 = 107 PERSONS
STOCK (+ NON-SALES) : 1,843 SF. / 300 = 7 PERSONS
TOTAL PERSONS = 111 PERSONS

DOOR 104" @ .15 = 1360 PERSON CAPACITY
ACTUAL CAPACITY = 114 PERSONS
EGRESS CAPACITY = 1360 PERSONS
PROPOSAL IS LESS THAN ALLOWABLE - OKAY

SIZE OF DOORS (SECTION 1008.1.1)
MINIMUM 32" CLEAR DOOR WIDTH REQUIRED

EXIT ACCESS (SECTION 1014)
AISLES IN GROUP 'M' = 36" (SECTION 1017.2)
CORRIDOR WIDTH = 44" (SECTION 1018.2)
DEAD ENDS = 20 FEET (SECTION 1018.4)

EXIT ACCESS TRAVEL DISTANCE: (TABLE 1016.1)
GROUP 'M' [W/ SPRINKLER SYSTEM] = 250 FT.

MINIMUM PLUMBING FACILITIES (TABLE 403.1):

PROVIDED:
(1) EXG UNISEX TOILET ROOM TO REMAIN
(1) EXG DRINKING FOUNTAIN

STORE TABULATION

AREA:	SQ. FT.	CALCULATION	OCCUPANT LOAD	RATIO
SALES AREA:	3,205	SQ. FT/ 30 PERSONS	107	93%
STOCK AREA:	1,738	SQ. FT/ 300 PERSONS	6	2%
NON-SALES AREA:	105	SQ. FT/ 300 PERSONS	1	100%
TOTALS	5,048		114	

LESS THAN 500 OCCUPANTS OR MORE THAN 50 REQUIRES 2 EXITS
2 ARE PROVIDED

LANDLORD COMMENTS

FIELD VERIFICATION REQUIREMENT:

TENANT, TENANT'S DESIGN TEAM, AND TENANT'S CONTRACTORS SHALL FIELD VERIFY ALL FIELD CONDITIONS PRIOR TO HE START OF ANY CONSTRUCTION. BE ADVISED THAT ALL CHANGES AND MODIFICATION TO THE LANDLORD'S APPROVED DRAWINGS SHALL BE RESUBMITTED TO LANDLORD FOR RE-APPROVAL. ANY CONSTRUCTION COMPLETED WITH OUT LANDLORD APPROVAL SHALL BE CORRECTED AS APPROVED BY LANDLORD AT TENANT'S EXPENSE.

SIMON GENERAL COMMENTS:
- PLANS REVIEWED AND APPROVED BY LANDLORD'S TENANT COORDINATOR MUST BE PRESENT ON THE JOB SITE AND BE ACCOMPANIED BY PLANS APPROVED FOR BUILDING PERMIT. ANY PROPOSED DEVIATION FROM THE LANDLORD APPROVED PLANS MUST BE NUMBERED AND CLOUDED ON THE PLANS, AND THEN RESUBMITTED BY THE TENANT TO THE LANDLORD FOR RE-APPROVAL PRIOR TO ANY CONSTRUCTION CHANGES TAKING PLACE IN THE FIELD.
- TENANT'S GC IS REQUIRED TO CHECK IN WITH LANDLORD'S ON SITE PROPERTY MANAGER PRIOR TO THE START OF TENANT CONSTRUCTION. CONTACT MALL MANAGEMENT OFFICE.
- CONTACT PROPERTY MANAGEMENT FOR CONSTRUCTION BARRICADE REQUIREMENTS, INCLUDING BARRICADE GRAPHICS.
- TENANT'S GC IS RESPONSIBLE TO COMPLY WITH ALL MALL RULES AND REGULATIONS AND AS INSTRUCTED ON SITE BY MALL MANAGEMENT.
- ANY DAMAGE TO LANDLORD'S PROPERTY DURING TENANT DEMOLITION OR CONSTRUCTION (MALL FLOORING, BULKHEAD, NEUTRAL PIER/ETC.) WILL BE REPAIRED PER MALL SPECIFICATIONS, AT TENANT'S EXPENSE.
- ANY LANDLORD EQUIPMENT, COMPONENT AND/OR SERVICE FEEDING OTHER ACCESSIBLE TO THE LANDLORD, TENANT SHALL INSTALL ACCESS PANELS AS REQUIRED TO MAINTAIN ACCESS. ACCESS PANELS SHALL BE LABELLED TO PROPERLY IDENTIFY SYSTEM. COORDINATE WITH MALL OPERATIONS.
- ALL LANDLORD COMMENTS FROM PREVIOUS REVIEW(S) ARE TO BE INCORPORATED INTO THE FINAL SET OF APPROVED DRAWINGS AND ARE TO BE ADHERED TO IN THE FIELD.
- ALL LANDLORD COMMENTS ON THIS SET OF DRAWINGS SHALL APPLY TO THE ENTIRE DOCUMENT SET, EVEN IF NOT REPEATED ON EVERY SHEET IN DRAWING SET.
- THE RE-USE OF ANY EXISTING CONSTRUCTION, FINISHES, EQUIPMENT, OR ELECTRICAL, PLUMBING OR HVAC SYSTEMS CURRENTLY IN THE SPACE IS CONDITIONAL UPON IT BEING APPROPRIATE FOR RE-USE. ANY EXISTING CONDITION OR EQUIPMENT TO BE RE-USED MUST BE RESTORED TO LIKE NEW CONDITIONS. THE LANDLORD MAKES NO WARRANTY ON THE RE-USE OF ANY EXISTING CONDITION IN THE SPACE.
- IF AT ANY POINT A FAILURE, UPGRADES AND/ OR IMPROVEMENTS TO EXISTING SYSTEMS OCCUR, IT IS THE SOLE RESPONSIBILITY OF THE TENANT TO REPAIR OR REPLACE, AT TENANT EXPENSE.
- LANDLORD AND TENANT RESPONSIBILITIES ARE AS DEFINED IN LEASE AGREEMENT.

LIST OF DRAWINGS

SHEET	SHEET TITLE	REVISION DATE AND NO. 1	2	3	4	5	6	7
G1.0	COVER SHEET	4/20/17 1						
G1.0A	APPENDIX B							
G1.1	SPECIFICATIONS							
G1.2	MECHANICAL AND ELECTRICAL SPECIFICATIONS							
D1.0	DEMOLITION PLAN	4/20/17 1						
D2.0	DEMOLITION REFLECTED CEILING PLAN	4/20/17 1						
A0.1	LIFE SAFETY PLAN	4/20/17 1						
A1.0	CONSTRUCTION PLAN	4/20/17 1						
A1.1	PARTITION TYPES	4/20/17 1						
A1.2	COLUMN DETAILS							
A1.3	CONSTRUCTION DETAILS							
A1.4	TOILET ROOM DETAILS							
A2.0	STOREFRONT PLANS AND ELEVATIONS	4/20/17 1						
A2.1	STOREFRONT SECTIONS AND DETAILS							
A2.2	ENLARGED STOREFRONT PLAN DETAILS							
A3.0	FINISH PLAN	4/20/17 1						
A4.0	INTERIOR ELEVATIONS	4/20/17 1						
A5.0	FIXTURE PLAN	4/20/17 1						
A5.1	FIXTURE SECTIONS AND DETAILS							
A5.2	CASHWRAP AND BACKURAP DETAILS							
A6.0	REFLECTED CEILING PLAN	4/20/17 1						
A6.1	CEILING DETAILS							
E1.0	ELECTRICAL POWER PLAN	4/20/17 1						
E2.0	ELECTRICAL LIGHTING PLAN							
E3.0	ELECTRICAL POWER RISER & SCHEDULES							
E4.0	ELECTRICAL DATA/VOICE SYSTEMS DETAILS							
E4.1	LOW VOLTAGE NOTES AND DETAILS							
M1.0	MECHANICAL PLAN	4/20/17 1						
M2.0	MECHANICAL DETAILS AND PLUMBING SPECIFICATIONS							

SYMBOLS

CALL OUT — XX / XX — DETAIL NUMBER /LETTER / DETAIL SHEET
SECTION — XX / XX
REVISION IDENTIFIER — 1
ELEVATION — XX
MINIMUM CLEARANCE
FINISH IDENTIFIER REF. TO DOOR SCHEDULE — FP-1
EQUIPMENT IDENTIFIER REF. TO EQUIPMENT. SCHEDULE — 1
WALL SECTION REF. TO PARTITION SCHEDULE — A
MINIMUM CLEARANCE
5'-0" CLEAR
COLUMN GRID LINE — A
PLAN DETAIL — XX
DOOR IDENTIFIER REF. TO DOOR SCHEDULE — 1

ABBREVIATIONS

AFF.	ABOVE FINISH FLOOR	LAV.	LAVATORY	R.O.	ROUGH OPENING
BRG.	BEARING	MFR.	MANUFACTURER	RUG.	ROLL UP GRILLE
BLDG.	BUILDING	MAX.	MAXIMUM	SIM.	SIMILAR
B.O.S.	BOTTOM OF SOFFIT	MIN.	MINIMUM	SPEC.	SPECIFICATION
CLG.	CEILING	MISC.	MISCELLANEOUS	SQ.	SQUARE
CL	CENTER LINE	N.I.C.	NOT IN CONTRACT	STD.	STANDARD
CONST.	CONSTRUCTION	O.C.	ON CENTER	TYP.	TYPICAL
DIA.	DIAMETER	OPP.	OPPOSITE	U.N.O.	UNLESS NOTED
DIM.	DIMENSION	PL.	PLATE		OTHERWISE
EQ.	EQUAL	R. RAD.	RADIUS	VERT.	VERTICAL
FT.	FEET	R.C.P.	REFLECTED CEILING	V.I.F.	VERIFY IN FIELD
FLUOR.	FLUORESCENT		PLAN	W/	WITH
GA.	GAUGE	REQ'D	REQUIRED	W/O	WITHOUT
G.C.	GENERAL CONTRACTOR	REV.	REVISION	WD.	WOOD
G.W.B.	GYPSUM WALL BOARD	RM.	ROOM		
H. HT.	HEIGHT				
HOR.	HORIZONTAL				

FOOT LOCKER, INC.

STORE PLANNING DEPT.
330 WEST 34TH STREET
NEW YORK, NY 10001

ARCHITECT:
SARGENTI ARCHITECTS
461 FROM ROAD
PARAMUS, NJ 07652
973.253.9393 TEL
973.253.9390 FAX
WWW.SARGARCH.COM

ENGINEER:
MPW ENGINEERING, LLC
110 W. 7TH STREET • SUITE 600 • TULSA, OK 74119
(918) 582-4088 • (918) 582-4087 FAX

SEAL

REVISIONS

NO.	DESCRIPTION	DATE
	PERMIT, BID, L.L.	3/21/17
1	LANDLORD COMMENTS	4/2017

DATE:	03/21/17
SCALE:	AS NOTED
GROSS AREA:	5,048 SQ. FT.
SALES AREA:	3,205 SQ. FT.
PROJECT # :	1703-17
DRAWN BY:	MB

FOOTACTION

PROJECT TITLE
CONCORD MILLS
8111 CONCORD MILLS BLVD
CONCORD, NC 28027
SPACE 615B

STORE NO. 57183

SHEET TITLE
COVER SHEET

G1.0

SHEET NO. 1 OF 28