

14 13 12 11 10 9 8 7 6 5 4 3 2 1

POWER DROP SCHEDULE

NO	DESCRIPTION
PD1	MOUNT RECEPTACLE(S) ON TOP OF DISPLAY UNIT(S)
PD2	MOUNT RECEPTACLE(S) 6" ABOVE BASE OF DISPLAY UNIT(S); SO THAT RECEPTACLE(S) AND CONDUIT DO NOT INTERFERE WITH SHELF HEIGHT ADJUSTMENTS
PD3	PROVIDE DIRECT CONNECTION TO EQUIPMENT
PD4	OPEN STRUCTURE: MOUNT RECEPTACLE AT BAR JOIST AND INSTALL FURNISHED CORD REEL

POWER DROP NOTES

POWER DROPS WILL BE IDENTIFIED BY AN IPTV TAG POWER POLE, 44A, 46E, ETC. ALL CHECKOUT REAR SHALL BE CONSIDERED POWER DROPS.

A PORTION OF THIS PLAN BASED ON THE FINAL MERCHANDISE LAYOUT MAY BE ISSUED TO SHOW FINAL LOCATIONS FOR THE POWER DROPS. IF THE MERCHANDISE PLAN DOES NOT CHANGE, THIS PLAN WILL NOT BE REISSUED. PROVIDE CIRCUTRY TO DISPLAY RACKS AS THE RACKS ARE SET. IN ADDITION, THE FOLLOWING POWER DROP NOTES APPLY:

- THERE WILL BE NO ADDITIONAL CHARGE FOR DROP RELOCATION WITHIN POWER DROP ZONES DEFINED ON DRAWINGS.
- AT CLOSE OF PROJECT THE GENERAL CONTRACTOR AND CONSTRUCTION MANAGER SHALL REVIEW ADDITIONAL OR DELETED POWER DROPS WITHIN EACH ZONE TO VERIFY ANY ADDITIONAL CHARGES OR CREDITS THAT APPLY DUE TO CHANGES.
- ADDING OR SUBTRACTING A POWER DROP TO ANY ZONE WILL RESULT IN A CHARGE OR CREDIT ACCORDING TO SPECIAL CONDITIONS.
- PROVIDE JUNCTION BOX AND CIRCUITRY TO NEAREST JOIST ABOVE LOCATION SHOWN ON DRAWING. EXTEND CONDUIT AND CIRCUITRY FROM JUNCTION BOX TO ENDCAP OF DISPLAY RACK.
- WHEN EXPOSED VERTICAL CONDUIT FROM STRUCTURAL CONNECTION TO GONDOLA EXCEEDS 10 FEET, INTERMEDIATE METALLIC CONDUIT (IMC) SHALL BE USED IN LIEU OF ELECTRICAL METALLIC CONDUIT (EMT). THE IMC CONDUIT AND COUPLINGS SHALL BE THREADED AND BE SECURELY FASTENED AT THE GONDOLA AND AT STRUCTURE.
- PROVIDE CONDUIT, RECEPTACLE(S) AND FINAL CONNECTIONS AT DISPLAY RACK SHELVING PER POWER DROP SCHEDULE UNLESS NOTED OTHERWISE ON DRAWING. VERIFY EXACT HEIGHT AND LOCATION OF RECEPTACLE(S) WITH STORE PLANNING SET-UP SUPERVISOR PRIOR TO INSTALLATION.
- POWER DROPS FED FROM TRACK BUSWAY: INSTALL PLUG-IN UNIT AT A POINT ON TRACK BUSWAY NEAREST POWER DROP(S).

KEYNOTES

16.145 CONNECT CIRCUIT(S) TO EXISTING BRANCH CIRCUITRY. MINIMUM WIRE SIZE AND PANELBOARD CIRCUIT ARE NOTED. VERIFY SIZE RATING AND CONDITION OF EXISTING BRANCH CIRCUIT CONDUIT AND WIRE PRIOR TO USE TO ENSURE THAT THEY MEET REQUIRED SIZE AND ALL U.L. RATINGS AND REPLACE AS REQUIRED.

16.146 FITTING ROOM POWER AND 3/4" DATA CONDUIT SHALL DROP AT THIS LOCATION. EXTEND DESK POWER AND DATA CONDUIT DOWN WALL, THEN 48" TO DESK. FITTING ROOM CONDUIT AND RECEPTACLES SHALL BE 8" ABOVE OPEN GRID. HARDWARE (1) LIGHT PER ROOM DIRECTLY TO RECEPTACLE JUNCTION BOX.



STIPULATION FOR REUSE: THIS DRAWING IS THE PROPERTY OF CYNERGY ENGINEERING, LLC. IT IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREON. IT IS NOT TO BE REPRODUCED, COPIED, REPRODUCED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF CYNERGY ENGINEERING, LLC.

CONSULTANTS: [Blank]



ISSUE BLOCK

NO	DATE	DESCRIPTION


CHECKED BY: DEB
 DRAWN BY: BDJ
 PHOTO CYCLE: 02/8/2020
 DOCUMENT DATE: 04/15/2020

DOCUMENTS WITHOUT SIGNATURE AND REQUIRED SEAL OF APPROVER ARE NOT FOR CONSTRUCTION

CYNERGY ENGINEERING, PLLC
 CA # P-0884
 EXPIRES 06/30/2020
 MATTHEW RUTKOWSKI, P.E.
 ENGINEER OF RECORD

POWER DROP PLAN

SHEET: E2.1

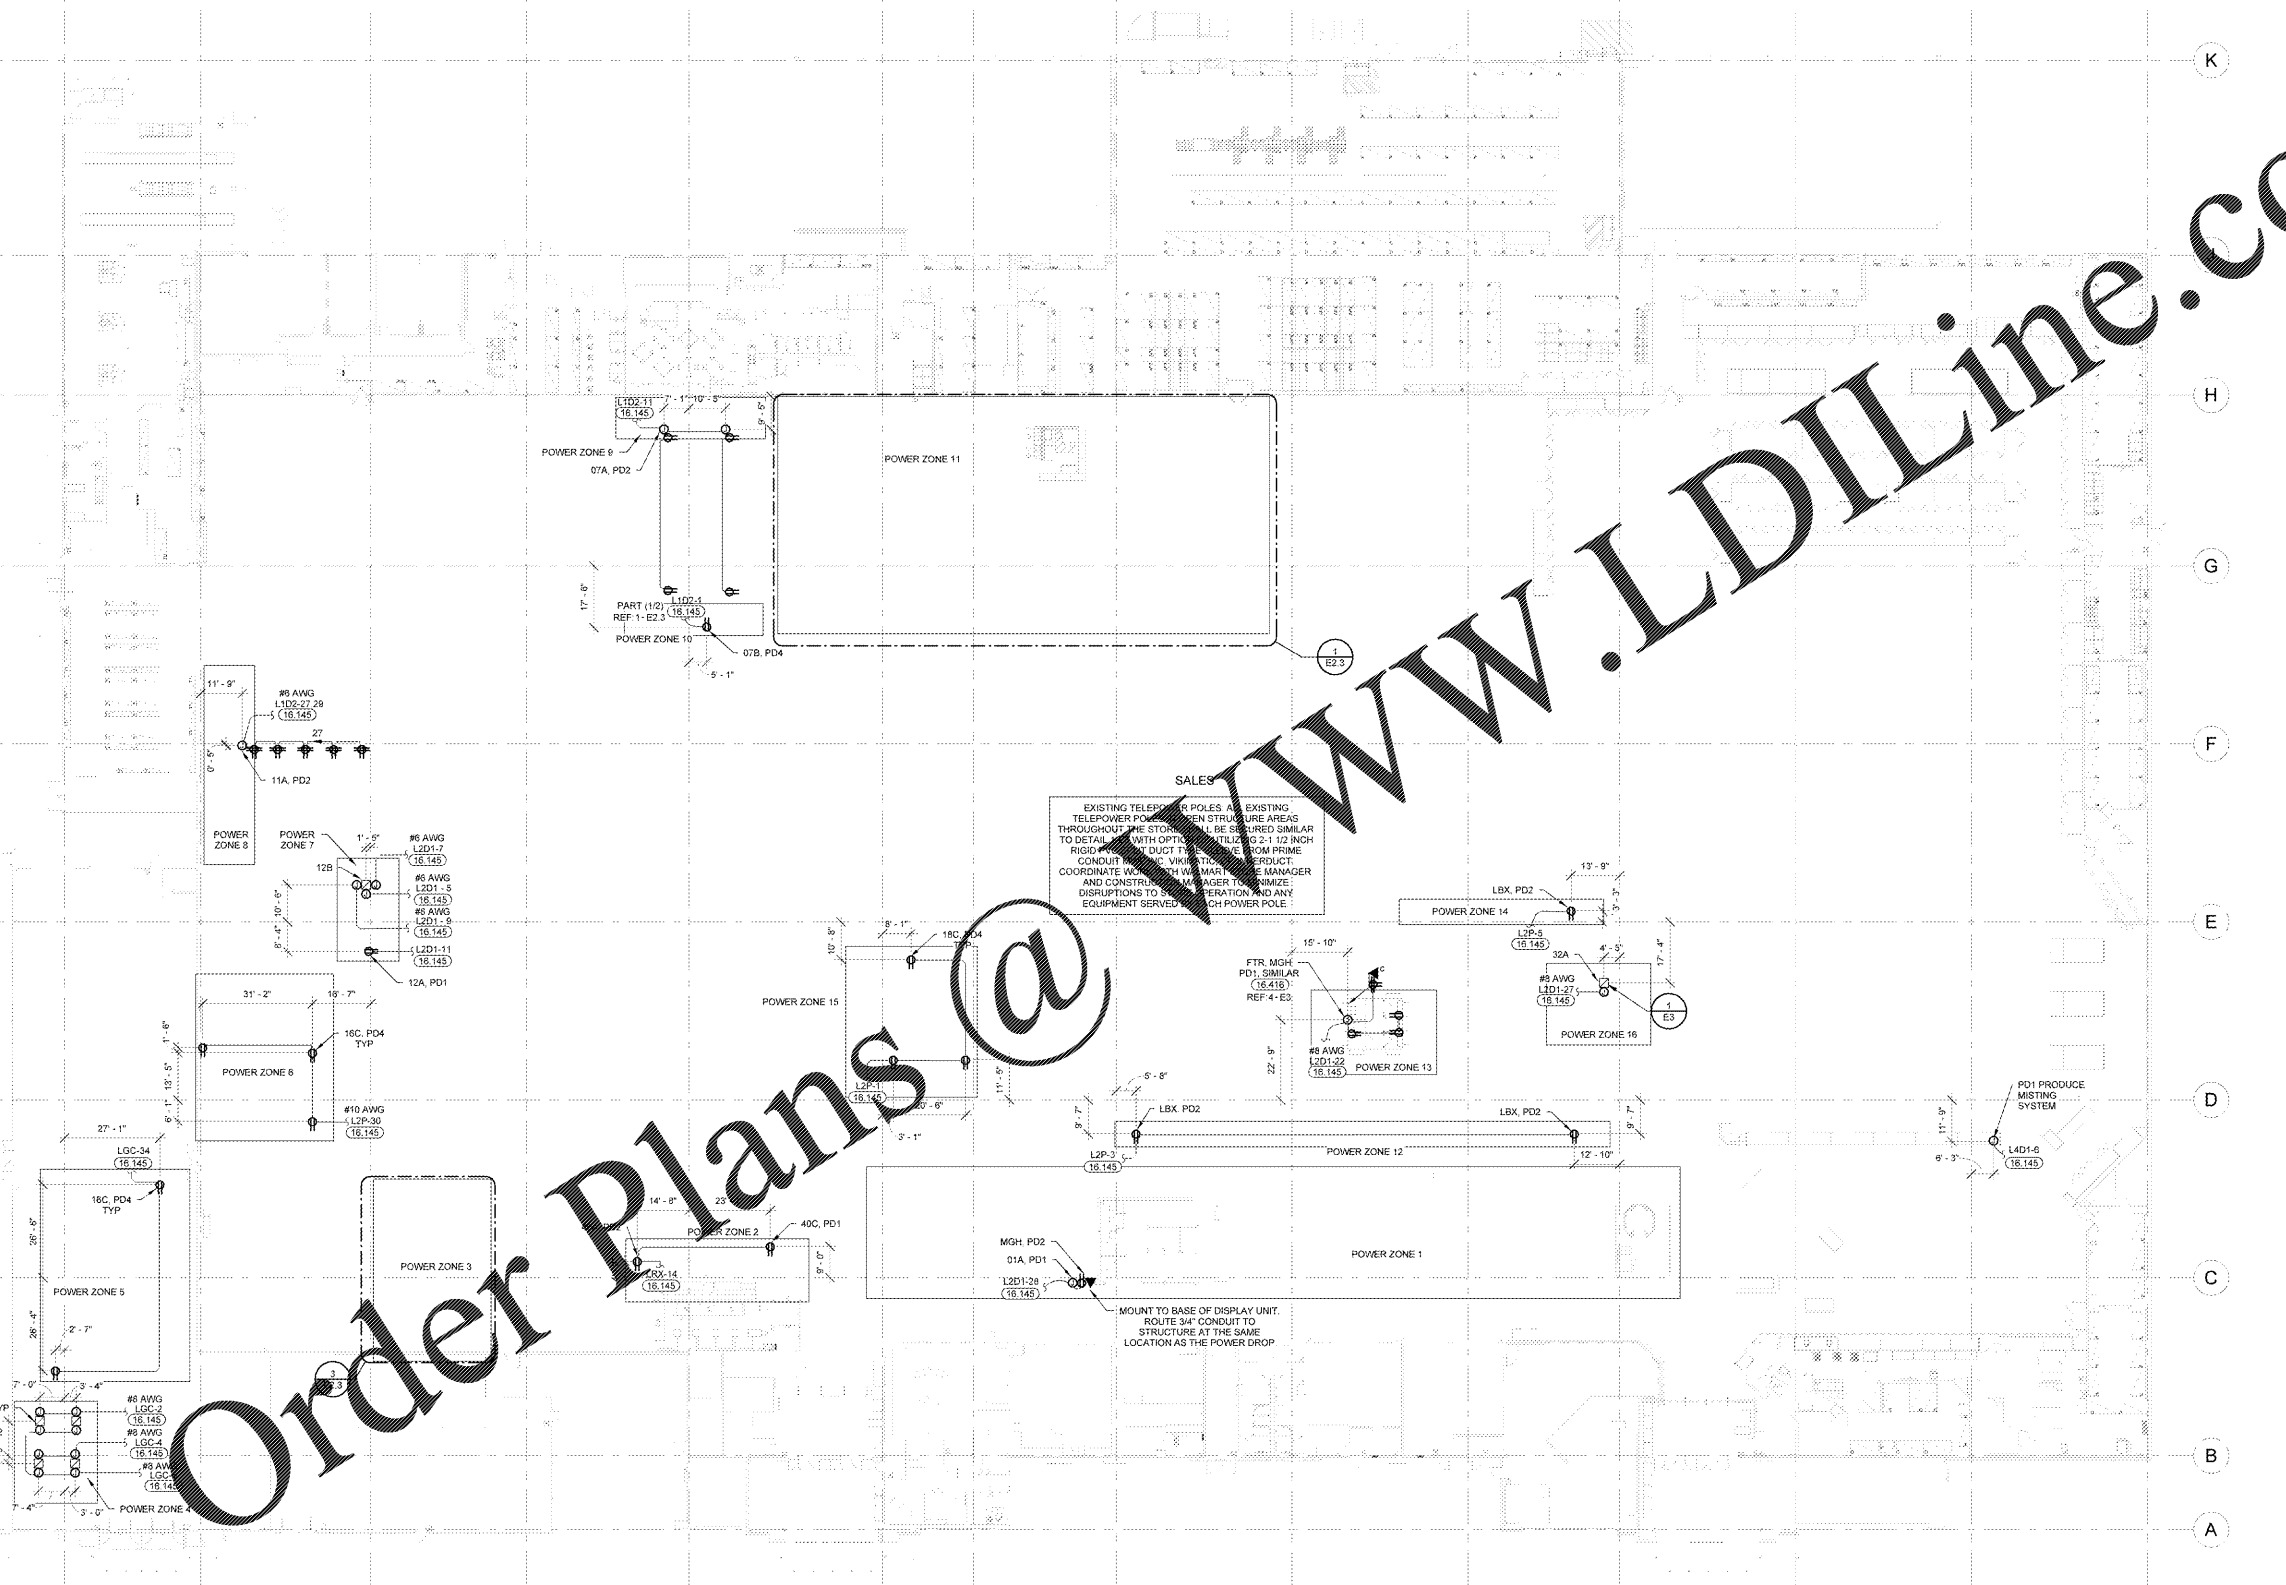

1 POWER DROP PLAN
 1" = 20'-0"

EXISTING CONDITIONS WERE TAKEN FROM ORIGINAL DRAWINGS AND MAY NOT REFLECT EXACT 'AS-BUILT' CONDITIONS. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO SUBMITTING FINAL BIDS. CONTRACTOR SHALL CAREFULLY COORDINATE NEW WORK AND DEMOLITION WITH ALL OTHER DISCIPLINES AND EXISTING CONDITIONS.

EACH SUBCONTRACTOR IS RESPONSIBLE FOR HAVING A THOROUGH KNOWLEDGE OF ALL DRAWINGS AND SPECIFICATIONS IN THEIR RELATED FIELD. THE FAILURE TO ACQUAINT THEMSELVES WITH THIS KNOWLEDGE DOES NOT RELIEVE THE RESPONSIBILITY OF PERFORMING THE WORK PROPERLY. NO ADDITIONAL COMPENSATION SHALL BE ALLOWED BECAUSE OF CONDITIONS THAT OCCUR DUE TO FAILURE TO FAMILIARIZE WORKERS WITH THIS KNOWLEDGE.