
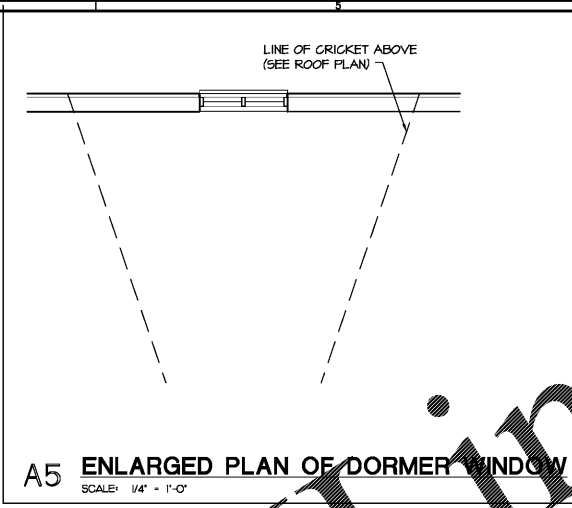



30 AUG 2017 10:04:50 AM 1004-FBC-Hoyden\1004-FBC-Hoyden\1004-SD\A200-A120-Phase One.dwg  
 PLOTTED BY: mgriffin

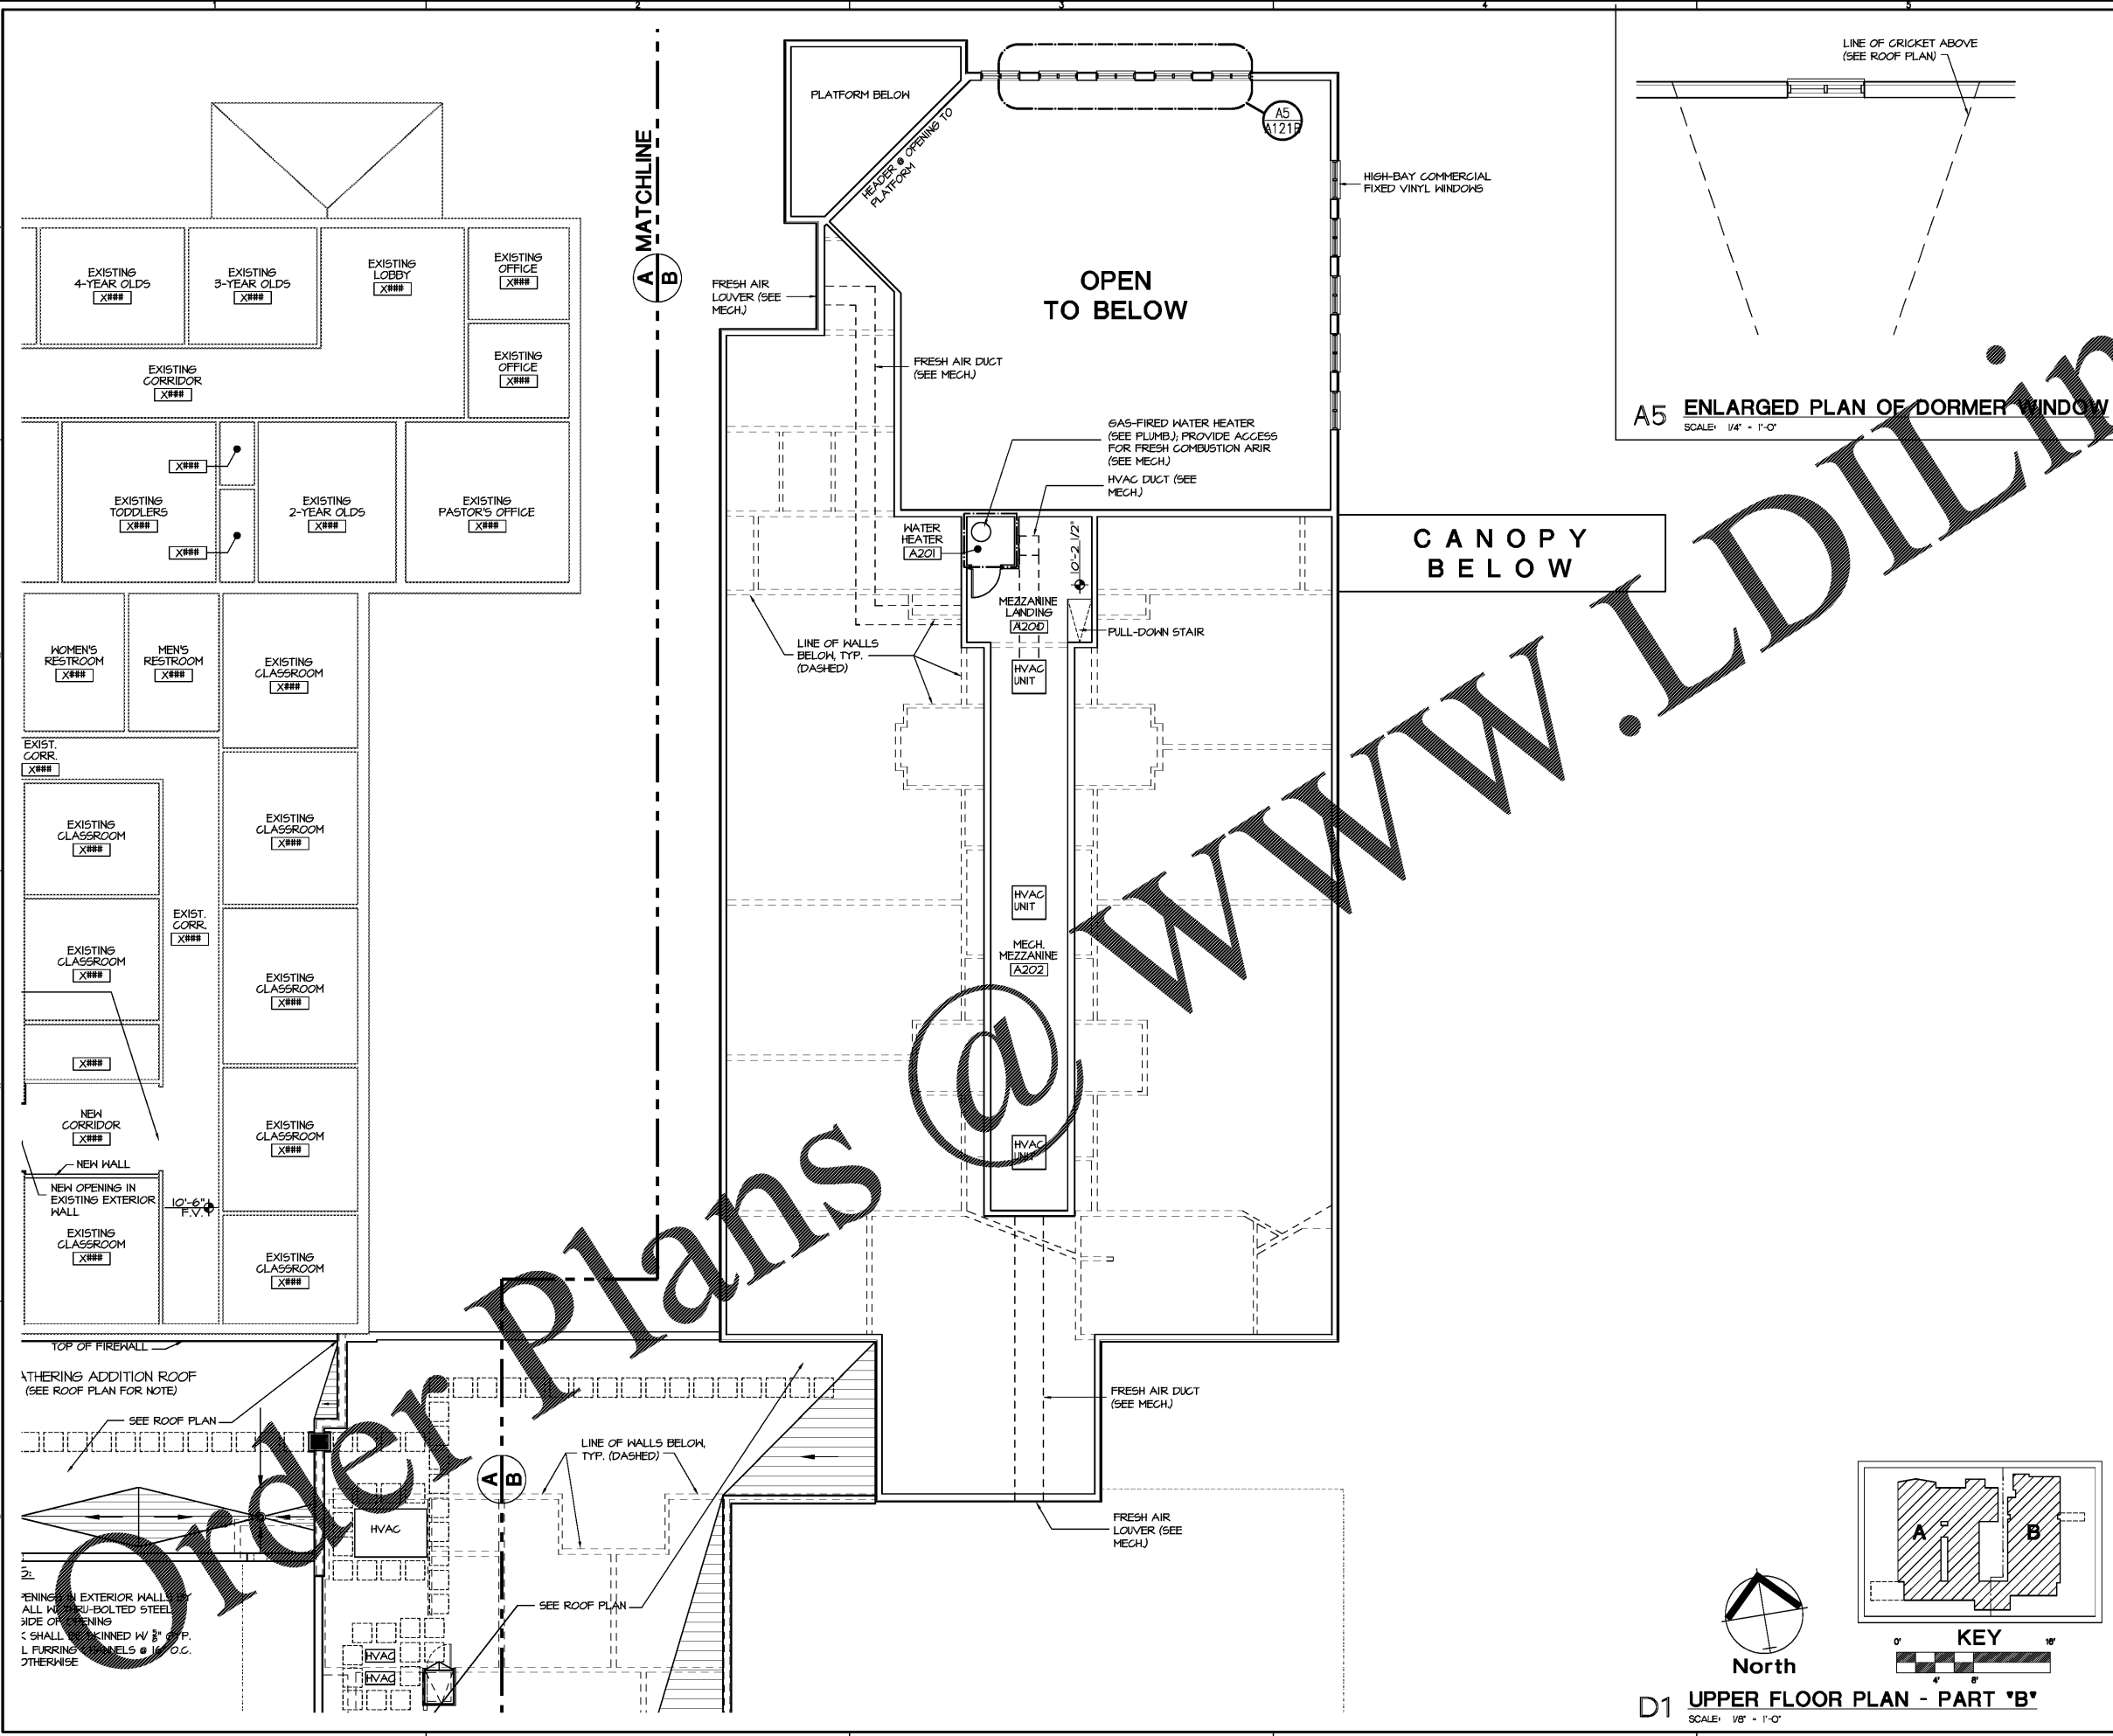

- ### FLOOR PLAN GENERAL NOTES
- GENERAL - REFER ALSO TO GENERAL NOTES OF SHEET A121A FOR ADDITIONAL INFORMATION.
  - FIRE RESISTANCE - MAINTAIN INTEGRITY OF PARTITION WALLS AND SMOKE PARTITIONS THROUGHOUT, UNLESS NOTED OTHERWISE. MAINTAIN INTEGRITY OF ALL EXISTING FIREPROOFING, FIRESTOPPING, FIRE RATED WALLS, COVERS, ENCLOSURES, ETC. ENSURE FIRE RESISTANCE MEETS OR EXCEEDS THE ORIGINAL REQUIREMENTS SPECIFIED. PATCH ALL AREAS DAMAGED OR REMOVED DUE TO NEW CONSTRUCTION TO MATCH THAT OF THE ORIGINAL OR AS REQUIRED FOR NEW.
  - FIRE EXTINGUISHERS - MAINTAIN MAXIMUM TRAVEL DISTANCE TO A FIRE EXTINGUISHER SHALL NOT EXCEED 75' FROM ANY POINT WITHIN THE BUILDING. ALL NEW FIRE EXTINGUISHERS SHALL BE INSTALLED IN RECESSED CABINETS AT ACCESSIBLE LOCATIONS, UNLESS NOTED OTHERWISE. RELOCATE ANY EXISTING FIRE EXTINGUISHERS NOT LOCATED IN CABINETS TO NEW CABINETS WHERE POSSIBLE. ALL EXISTING EXTINGUISHERS SHALL BE RECERTIFIED PRIOR TO RELOCATION.
  - EXISTING SYSTEMS - ALL EXISTING SYSTEMS SUCH AS FIRE ALARMS, ELECTRICITY, WATER, SEWER, FIRE SPRINKLERS, ETC. SHALL REMAIN ACTIVE AT ALL TIMES DURING DEMOLITION & CONSTRUCTION. ANY EXCEPTION TO THIS SHALL BE COORDINATED WITH THE OWNER AND ARCHITECT PRIOR TO THE NEED.
  - FINISHES - ALL EXISTING FINISHES SHALL REMAIN, UNLESS INDICATED OTHERWISE. CONTINUE EXISTING FINISHES INTO NEW EXTENDED AREAS THAT ARE ADJACENT. PATCH & REPAIR EXISTING TO MATCH NEW. REPAINT ALL PATCHED OR EXTENDED WALLS TO NEAREST CHANGE OF DIRECTION, WALL TERMINATION, OR INTERSECTION.
  - FLOORS - EXISTING CONCRETE FLOOR SLABS SHALL BE VERIFIED IN FIELD TO BE LEVEL WITHIN TOLERANCES ALLOWED FOR NEW CONSTRUCTION. FLOORS FOUND NOT TO BE WITHIN TOLERANCES SHALL BE LEVELLED APPROPRIATELY TO MEET REQUIREMENTS. ANTICIPATED AREAS THAT WILL REQUIRE LEVELING ARE INDICATED ON THE FLOOR PLANS.
  - CONFLICTS - ANY CONFLICT FOUND WITH EXISTING CONDITIONS AND REQUIREMENTS FOR NEW CONSTRUCTION SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE ARCHITECT. IF THE CONFLICT AFFECTS THE PROGRESS OF THE WORK, VERIFY WITH ARCHITECT SOLUTION NECESSARY PRIOR TO PROCEEDING WITH THAT PORTION OF THE WORK AND IN A TIMELY FASHION SO AS NOT TO DELAY THE WORK. COORDINATE ALL TRADES TO ASCERTAIN NO FURTHER WORK WILL BE IMPACTED BY THE CONFLICT, OR ITS SOLUTION.
  - SEALED DOOR OPENINGS - ALL DOOR OPENINGS SO INDICATED SHALL BE SEALED IN EXISTING PARTITIONS THAT REMAIN WITH CONSTRUCTION TO MATCH THE EXISTING WALL THICKNESS, FINISH AND RATINGS, IF ANY.
  - EXISTING CONSTRUCTION - ALL EXISTING CONSTRUCTION WITHIN THE CONSTRUCTION LIMITS SHALL BE PATCHED AND REPAIRED AS NECESSARY TO UPGRADE TO A CONDITION THAT MATCHES THE NEW CONSTRUCTION. EXISTING WALLS THAT CONTAIN PLUMBING, ELECTRICAL OR OTHER SERVICES REQUIRING MODIFICATION SHALL BE CUT BACK TO THE NEAREST STUD TO ALLOW REQUIRED WORK. AFTER COMPLETION, RECONSTRUCT TO A CONDITION THAT MATCHES NEW CONSTRUCTION, FLUSH WITH ADJACENT SURFACES. EXISTING FLOORS WHERE CONSTRUCTION HAS BEEN REMOVED SHALL BE PATCHED AND LEVELLED TO MATCH THE EXISTING. TAKE NECESSARY PRECAUTIONS TO ENSURE WEATHERTIGHT BUILDING ENVELOPE IS MAINTAINED THROUGHOUT DURATION OF CONSTRUCTION.
  - ALTERNATE PRICING - FOR AREAS INDICATED TO BE AN ALTERNATE PRICE, DO NOT DUPLICATE WORK SHOWN IN THE BASE BID. CREDIT ANY WORK SHOWN IN BASE BID THAT IS DELETED (OR UNNECESSARY) FOR THE ALTERNATE. WALLS IN THE ALTERNATE ARE FILLED WITH SOLID, SHADED FILL.

- ### FLOOR PLAN KEYNOTES
- (SEE LIFE SAFETY PLANS FOR LOCATION OF FIRE WALLS & RATINGS)
- ROOF ACCESS LADDER & HATCH ABOVE
  - FLOOR DRAIN (SEE PLUMB)
  - DOORS HELD OPEN W/ MAGNETIC HOLD-OPENS
  - NEW AREA DRAIN (SEE A020)

- ### FLOOR PLAN LEGEND
- EXISTING CONSTRUCTION TO REMAIN (SHADED LINE)
  - EXISTING CONSTRUCTION TO BE DEMOLISHED
  - MANUFACTURED STONE WATER TABLE ON WOOD STUD EXTERIOR WALL W/ STRUCTURAL EXTERIOR PLYWOOD SHEATHING AND 1" RIGID CONTINUOUS INSULATION (6MB ON STUDS, UNLESS NOTED OTHERWISE)
  - NON-RATED INTERIOR PARTITION, NEW (6MB ON STUDS, UNLESS NOTED OTHERWISE)
  - 1-HOUR FIRE-RATED PARTITION
  - 2-HOUR FIRE-RATED PARTITION
  - 3-HOUR FIRE-RATED PARTITION
  - SECTION CUT OR DETAIL/ENLARGED PLAN BUBBLE
  - KEYNOTE - SEE LIST ABOVE
  - WALL TYPE - SEE SHEET A401
  - DOOR IDENTIFICATION NUMBER (SEE DOOR SCHEDULE ON A610)
  - WINDOW IDENTIFICATION NUMBER (SEE WINDOW SCHEDULE)
  - CORRIDOR ROOM TITLE AND NUMBER (SEE FINISH SCHEDULE ON A600)

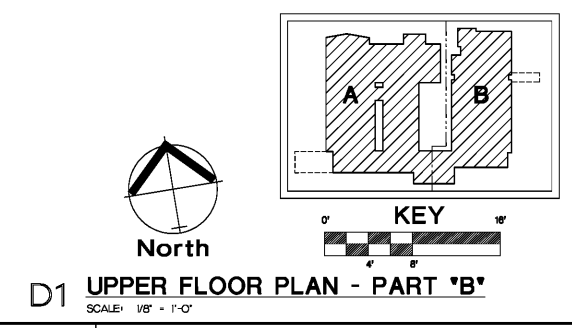

**D1 UPPER FLOOR PLAN - PART 'B'**  
 SCALE: 1/8" = 1'-0"

**SCHEMATIC DESIGN - FOR PERMITTING ONLY**  
 Corley Timothy Sweeney McCormac  
 ARCHITECTS, INC.  
 THREE RIVERCHASE OFFICE PLAZA / SUITE 124 / HOOPER, ALABAMA 35244  
 T 205.443.3720 F 205.443.3790 W ctsmarchitects.com  
 ALABAMA  
 09-29-17  
 1904  
**FIRST BAPTIST CHURCH**  
**CHILDREN'S ADDITION**  
 HAYDEN.  
**UPPER FLOOR PLAN**  
**PART "B"**  
**A121B**