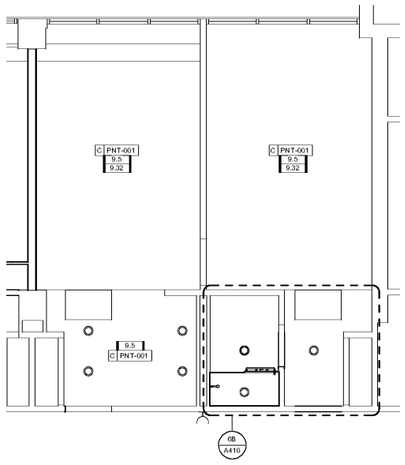

6C CONSTRUCTION PLAN RCP - KS1
SCALE: 1/4" = 1'-0"

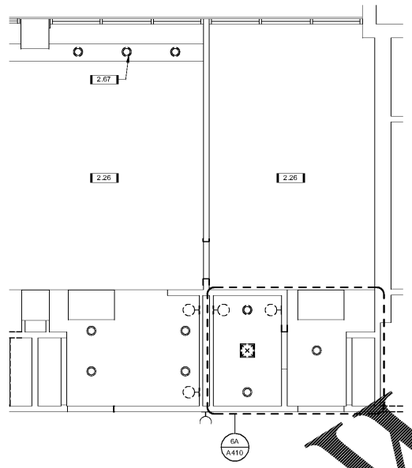

5C DEMOLITION PLAN RCP - KS1
SCALE: 1/4" = 1'-0"

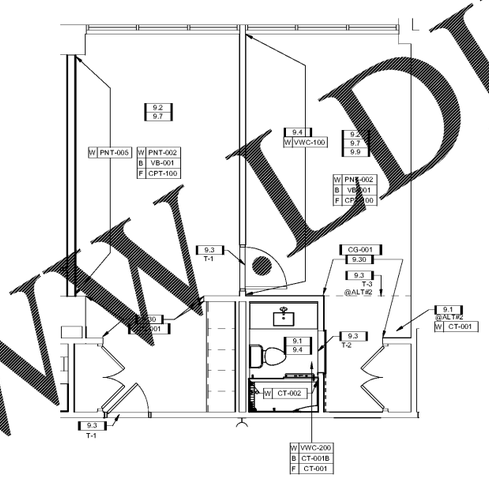

3C FINISH PLAN - KS1
SCALE: 1/4" = 1'-0" DRAWING REF: A112

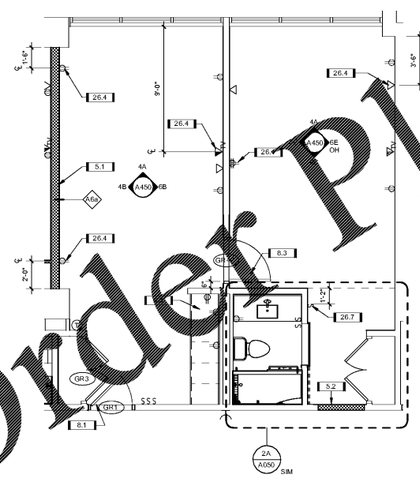

6A CONSTRUCTION PLAN - KS1
SCALE: 1/4" = 1'-0" DRAWING REF: A112

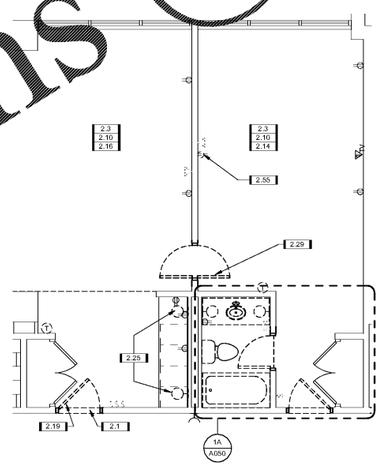

5A DEMOLITION PLAN - KS1
SCALE: 1/4" = 1'-0" DRAWING REF: A112

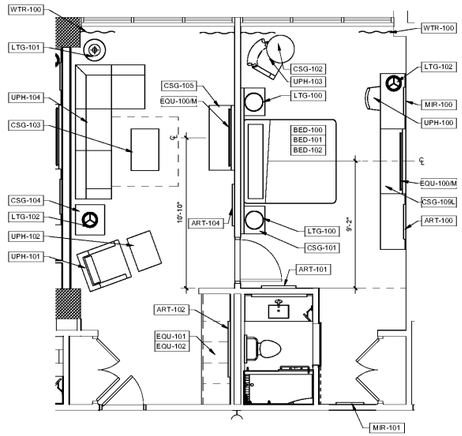

3A FF&E PLAN - KS1
SCALE: 1/4" = 1'-0" DRAWING REF: A112

GENERAL GUESTROOM NOTES

1. RELOCATE OUTLETS AS NEEDED TO COORDINATE WITH NEW FF&E LAYOUTS.
2. REFER TO FINISH NOTES ON A001 FOR MORE DETAILS.
3. STORE & PROTECT GUEST ROOM SAFES. INSTALL ONCE RENOVATION IS COMPLETE.
4. GC/ PROPERTY TO QUANTIFY HOW MANY WALLS ALREADY HAVE VWC REMOVED.
5. REFER TO NOTES - PATCH & REPAIR.
6. GC TO VERIFY PRESENCE OF ORANGE PEEL TEXTURE ON ALL WALL TO RECIEVE PAINT, ADD TEXTURE AS NECESSARY.
7. REFER TO 6A/A440 FOR TYPICAL ACCESSIBLE GUEST BATHROOM CEILING AREA DEMO WORK.
8. REFER TO 6B/A440 FOR TYPICAL ACCESSIBLE GUEST BATHROOM CEILING AREA NEW WORK.
9. REFER TO 6A/A410 FOR TYPICAL GUEST BATHROOM CEILING AREA DEMO WORK.
10. REFER TO 6B/A410 FOR TYPICAL GUEST BATHROOM CEILING AREA NEW WORK.
11. REFER TO A001 FOR PATCH AND REPAIR NOTES.
12. CARBON MONOXIDE DETECTORS ARE BATTERY OPERATED AND NOT TIED INTO THE FACP.
13. REPLACE ALL STAINED/DISCOLORED SMOKE DETECTORS.
14. PROVIDE NEW THRESHOLD T-1 AT CONNECTOR DOORS. REFER TO OVERALL PLANS FOR LOCATION OF ROOMS.

KEYNOTES

2.1 REMOVE DOOR THRESHOLD.
2.3 REMOVE CARPET/ CARPET PAD.
2.10 REMOVE WALL COVERING AND CORNER GUARDS (IF ANY), DO NOT ALLOW THE UNDER SURFACE/ SOME DRYWALL TO BE TORN. PATCH AND REPAIR WALLS AS REQUIRED TO RECEIVE NEW FINISHES.
2.14 REMOVE WINDOW TREATMENT, AND HARDWARE. VALANCE REMAINS.
2.16 REMOVE WINDOW TREATMENTS AND HARDWARE.
2.19 REMOVE DOOR / SALVAGE DOOR HARDWARE.
2.25 REMOVE WALL SCONCE, JUNCTION BOX AND WIRING.
2.26 REMOVE CEILING TEXTURE. PREPARE TO RECEIVE NEW SMOOTH FINISH.
2.29 REMOVE DOOR, DOOR FRAME, AND SALVAGE DOOR HARDWARE.
2.55 REMOVE ELECTRICAL OUTLET, JUNCTION BOX, AND PREPARE WALL FOR NEW ENLARGED JUNCTION BOX.
2.67 REMOVE EXISTING FIXTURE, WIRING, & J-BOX.
5.1 NEW PARTITION.
5.2 NEW PARTITION TO MATCH ADJACENT CONSTRUCTION.
6.3 PROVIDE NEW BASE CABINET TO HOUSE EXISTING FRIDGE. CABINET TO MATCH EXISTING BASE CABINETS.
8.1 PROVIDE NEW DOOR AND HARDWARE.
8.3 PROVIDE NEW DOOR, DOOR FRAME, AND HARDWARE.
9.1 PROVIDE NEW TILE AND SETTING BED.
9.2 NEW CARPET AND PAD.
9.3 PROVIDE NEW THRESHOLD.
9.4 NEW VINYL WALL COVERING.
9.5 PAINT CEILINGS.
9.7 PAINT WALLS, REFER TO FINISH PLAN. GC TO VERIFY PRESENCE OF ORANGE PEEL TEXTURE. PROVIDE ORANGE PEEL TEXTURE AS NECESSARY.
9.9 PAINT EXISTING WOOD VALANCE.
9.30 FULL HEIGHT CORNER GUARD ABOVE BASE.
9.32 SKIM COAT CEILING FOR SMOOTH SURFACE.
26.4 NEW RECEPTACLE. REFER TO ELECTRICAL DRAWINGS.
26.7 PROVIDE NEW WALL SWITCH AND JUNCTION BOX.

Baskervill
P.O. [illegible] RICHMOND, VA 23218-[illegible]

OWNER
PEACHTREE HOTEL GROUP

PROJECT
2.160425.0
DOUBLETREE BIRMINGHAM ALABAMA CONVERSION

8 PERIMTER PARK SOUTH BIRMINGHAM, AL 35243

STATE OF ALABAMA
Brooks Palmer
8992
06/13/2017
REGISTERED ARCHITECT

COPYRIGHT 2017 BASKERVILL. USE OF THIS WORK IN WHOLE OR IN PART IS FORBIDDEN WITHOUT EXPRESSED WRITTEN CONSENT.

ISSUE
6/12/2017 - CONSTRUCTION SET

DRAWING TITLE
ENLARGED GUESTROOM PLANS - KING SUITE KS1

DRAWING NO.
A413

Order Plans @ WWW.DILine.com

6/13/2017 11:12:27 AM