

GENERAL NOTES

- 1. LU + SMITH ENGINEERS HAS NOT PERFORMED ANY ASBESTOS INSPECTION AND IS NOT AWARE OF, NOR WILL BE RESPONSIBLE FOR ANY ASBESTOS RELATED ITEMS...

DUCTWORK:



- 1. PROVIDE FINAL CONNECTION TO ALL EQUIPMENT FURNISHED BY OWNER AND/OR OTHERS.

EQUIPMENT:

- 1. PROVIDE SMOKE DETECTORS FOR ALL MECHANICAL EQUIPMENT PER APPLICABLE CODE AND NFPA.

PIPING:

- 1. EQUIPMENT DRAIN PIPING: ALL SIZES, TYPE DWV COPPER, WROUGHT COPPER DRAINAGE PATTERN FITTINGS, 95-4 SOLDER.

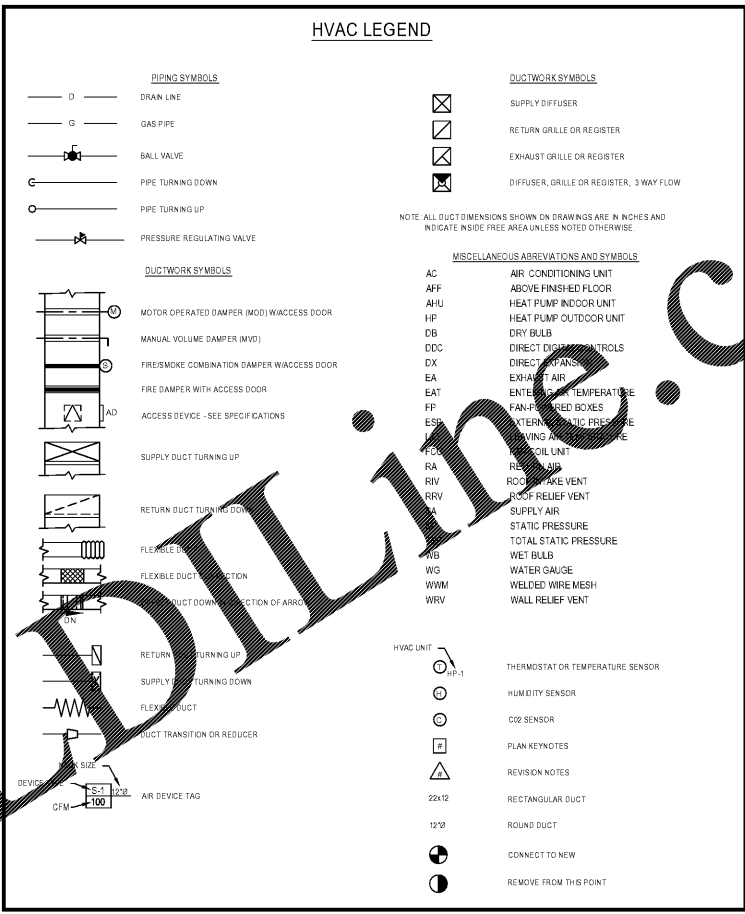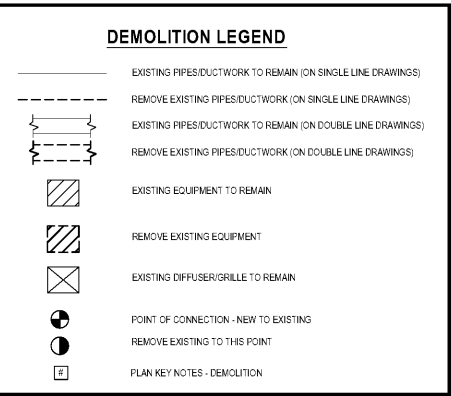

VARIABLE AIR VOLUME BOX SCHEDULE (INFORMATION PROVIDED BY OTHERS)

Table with columns for TAG, MFG, QTY, MODEL, SIZE, and various performance metrics like INLET SP, MIN SP, DOWN SP, etc.

\*\* Actual coil discharge is at maximum airflow, not heating airflow. MCA and MSCP values may vary from unit nameplate due to component changes related to actual product selections and devices applied.

Order Plans



PROJECT 2.160425.0 DTbH BIRMINGHAM ALABAMA CONVERSION



COPYRIGHT 2017 BASKERVILLE. USE OF THIS WORK IN WHOLE OR IN PART IS FORBIDDEN WITHOUT EXPRESSED WRITTEN CONSENT.

ISSUE 06/12/2017 - CONSTRUCTION DRAWINGS

Sheet List Table with columns SHEET NUMBER and SHEET TITLE.

DRAWING TITLE LEGEND, NOTES AND SCHEDULES

DRAWING NO