

Aug 22, 2017 - 11:01 am \\PALMETTO\Grimball\Active Projects on Maple\N-S Projects\PineWood Lake Community Center\Rose08.DWG.17.dwg

Order Plans

12" PINE TO REMAIN

TREE PROTECTION FENCING

8" PINE TO REMAIN
18" PINE TO REMAIN

TREE PROTECTION FENCING

14" OAK TO BE REMOVED
14" GUM TO BE REMOVED
14" OAK TO BE REMOVED


8" OAK TO BE REMOVED

8" OAK TO BE REMOVED

10" OAK TO BE REMOVED

FENCING:
4' HIGH ORANGE LAMINAR SAFETY NETTING ON POSTS OR 2"x4" POSTS (4') WITH DOUBLE 1"x4" RAILS

EXISTING GRADE

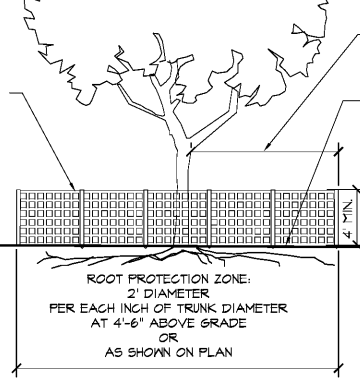

ROOT PROTECTION ZONE:
1' RADIUS FOR EACH INCH OF TRUNK DIAMETER AT 4'-6" ABOVE GRADE (TYP.)

3" PINE BARK MULCH AT ROOT ZONE

NOTES:

1. PROVIDE PROTECTION FENCE FOR ALL TREES TO REMAIN. FENCES SHALL BE IN PLACE PRIOR TO BEGINNING CONSTRUCTION.
2. NO GRADING, CLEARING, EQUIPMENT OR MATERIALS STORAGE, PARKING OR OTHER ACTIVITIES THAT COULD DISTURB OR COMPACT THE SOIL SHALL BE ALLOWED WITHIN FENCED PROTECTION AREA.
3. REFER TO PROJECT MANUAL FOR ADDITIONAL TREE PROTECTION REQUIREMENTS RELATED TO DEMOLITION, EXCAVATION, UTILITIES WORK, ETC. CONFLICTS, ETC.

A TREE PROTECTION FENCING
L-2 NOT TO SCALE

GRAND TREES REMOVED

TREE NUMBER	D.B.H.	SPECIES
1	26"	OAK
2	26"	OAK
3	24"	OAK
4	26"	OAK
5	36"	OAK
6	36"	OAK
7	26"	OAK
8	26"	OAK
9	26"	OAK
10	26"	OAK
11	28"	OAK
12	30"	PECAN
13	24"	OAK
14	24"	PECAN
15	24"	PECAN
17	24"	PECAN
18	24"	PECAN
TOTAL: 18		

PROPOSED TREES

QUANTITY	D.B.H.	SPECIES
20	4"	LIVEL OAK
24	3"	NUTTELL OAK
14	3"	TULIP POPLAR
TOTAL PROPOSED TREES: 68		

SUMMARY

TOTAL REQUIRED TREES PER EACH GRAND TREE 3: 1	54
TOTAL TREES PROVIDED	58

NOTE:
SEE CIVIL PLAN FOR ADDITIONAL TREE REMOVAL + DEMOLITION

POLE BARN

12" GUM TO REMAIN

22" GUM TO REMAIN

18" GUM TO REMAIN

18" OAK TO REMAIN

18" PECAN TO REMAIN

24" PECAN TO BE REMOVED (18)

8" CEDAR TO REMAIN

24" PECAN TO BE REMOVED (17)


TREE PROTECTION FENCING

18" GUM TO BE REMOVED

WATER QUALITY BUFFER DO NOT DISTURB

MATCH LINE

PRELIMINARY
NOT FOR CONSTRUCTION



Revisions	Date



GRIMBALL & ASSOCIATES
COTTERILL
LANDSCAPE ARCHITECTS & LAND PLANNERS
600 BELTLINE BOULEVARD COLUMBIA, SC 29205 (803)738-9525

PINEWOOD LAKE PHASE TWO
TREE REMOVAL & PROTECTION PLAN 2 OF 2

Drawn by: TGV
Checked by: MDG
Date: 8.08.17
Drawing No. L.2
Sheet No. 2 OF 4