


ELECTRICAL LEGEND

- ⊕ 120 VOLT SIMPLEX RECEPTACLE
- ⊕ 120 VOLT DUPLEX RECEPTACLE
- ⊕ 120 VOLT DUPLEX RECEPTACLE MOUNTED UNDER COUNTER
- ⊕ 120 VOLT DUPLEX RECEPTACLE CEILING MOUNTED
- ⊕ 208 VOLT, 1 OR 3 PHASE SINGLE RECEPTACLE
- ⊕ 208 VOLT, 3 PHASE SINGLE RECEPTACLE (TWIST LOCK)
- ⊕ 120 VOLT DUPLEX RECEPTACLE (WEATHER PROOF)
- ⊕ 120 VOLT QUAD RECEPTACLE (WEATHER PROOF)
- ☎ TELEPHONE
- DATA
- LINE/DATA
- ⊕ MOUNT AND NON-FUSED DISCONNECT
- 2-POLE WALL SWITCH
- ⊕ JUNCTION BOX
- HOMERUN
- SPECIAL PURPOSE OUTLET, 208/240 VOLT AS INDICATED, GROUND TYPE

- NOTES:**
1. P.O.S. L.V. WIRING BY P.O.S. INSTALLER POWER WIRING BY E.C.
 2. L.V. SPEAKER WIRING BY SPEAKER INSTALLER.
 3. MONITOR CABLE WIRING BY MONITOR INSTALLER, POWER WIRING BY E.C.

NOTE: REFER TO PANEL SCHEDULES SHEET E3 FOR INDICATION OF WHICH CIRCUITS WILL BE CIRCUITED THROUGH THE ENERGY CONTROL PANEL.

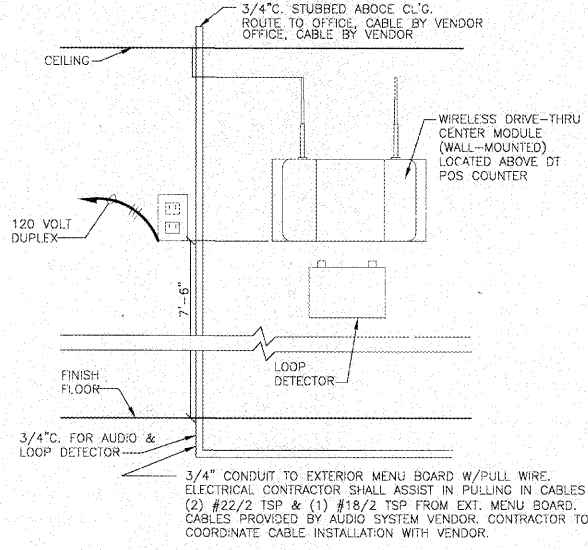

DRIVE THRU AUDIO SYSTEM DETAIL


C/R SYSTEM PLANS

1. COORDINATE WITH OWNER FOR INFORMATION ON INSTALLATION AND WIRING REQUIREMENTS FOR P.O.S., COMPUTERIZED CASH REGISTER SYSTEM. INSTALLED BY ELECTRICAL CONTRACTOR. VERIFY REQUIREMENTS WITH POS SUPPLIER PRIOR TO BID.
2. PROVIDE (2) 2" CONDUIT FOR TELEPHONE & HIGH SPEED INTERNET. COORDINATE STUB OUT OF WALL W/OWNER.
3. 1/2" CONDUIT TO ABOVE CEILING FOR SPEAKER WIRING. TERMINATE IN 2 X 4 BOX WITH 1/2" KNOCK OUT IN COVER.
4. SECURITY SYSTEM TO BE PROVIDED UNDER SEPARATE CONTRACT.
5. INSTALL SINGLE J-BOX WITH SS COVER WITH 3/4" RUBBER GROMMET HOLE. EXTEND 3/4" CONDUIT TO ABOVE CEILING (FOR FAST TRACK TIMER). SEE AUDIO SYSTEM DETAIL SHEET E4.
6. MOUNTED IN CEILING.
7. 1-1/2" CONDUIT FROM BELOW FRONT COUNTER TO ABOVE CEILING WITH PULL WIRE FOR POS WIRING.
8. ELECTRICAL, DATA, AND PHONE OUTLETS IN OFFICE FOR REFERENCE ONLY. VERIFY PLACEMENT AND MOUNTING WITH OWNERS REPRESENTATIVE PRIOR TO INSTALLATION.
9. 3-1/2" CONDUITS TO ABOVE CEILING FOR POS.
10. ALL POS EQUIPMENT TO BE CIRCUITED TO AN UNGATED GROUND SYSTEM.
11. POWER POLE TO HAVE TWO DUPLEX RECEPTACLE FOR POS EQUIPMENT. PROVIDE 2" K.O. FOR POS CABLES. ALL RECEPTACLES TO BE INSTALLED ABOVE HEIGHT OF TRANSFER CABINET FACING TO INSIDE OF TRANSFER CABINET. GC ORDER STATION PANEL, SEE KE-1 FOR ADDITIONAL INFORMATION.
12. (2) 1" CONDUIT STUBBED ABOVE CEILING TERMINATED AT 2x4 JUNCTION BOX 18" A.F.F. PROVIDE WITH 1" KNOCK OUT GROMMET IN COVER.
13. MOUNT BELLY WIRING FOR SECURITY CAMERA.
14. MOUNT ON WALL ADJACENT TO COUNTER STRUCTURE. COORDINATE W/OWNER.

CODED NOTES

NOTE: SEE SHEETS CPI-1.0 THRU CPI-2.3 FOR CPI INFORMATION RELATED TO WIRING OF CONTROLS & ENERGY MANAGEMENT.

NRD
 National Restaurant Designers
 ARCHITECTS & ENGINEERS
 5005 CARRINGTON MILL BLVD. SUITE 105
 MORRISVILLE, NORTH CAROLINA 27560
 PH: 919 544 7351 FAX: 919 544 9392
 A DIVISION OF LARRY ASSOCIATES



Starbuck
 HARDEE'S REVERSE PROTOTYPE
 BURLINGAME, NC 28428

BODDIE-NOELL ENTERPRISES, INC.
 P.O. BOX 808
 ROCKY MOUNT, NC
 27802-1908
 (252) 937-2800

OWNER: BN

REVISIONS	
NO.	DESCRIPTION

C/R SYSTEMS PLAN

DATE: 6-23-17

SHEET NUMBER:
E1.1