


- NOTES**
- JUNCTION BOX MOUNTED BEHIND FASCIA IN SOFFIT AREA FOR FUTURE TENANT SIGN (VERIFY EXACT LOCATION WITH GENERAL CONTRACTOR). ROUTE HOMERUN THRU TENANT TIME CLOCK.
 - DUPLEX RECEPTACLE FOR SHOW WINDOW LIGHTING MOUNTED FLUSH IN CEILING.
 - TENANT TELEPHONE JUNCTION BOX. EXTEND 1" EMPTY CONDUIT WITH PULLSTRING TO TELEPHONE TERMINAL CABINET.
 - EXTEND CIRCUITING TO LIGHTING THIS ROOM. EXHAUST FAN TO OPERATE WITH LIGHTING.
 - TELEPHONE TERMINAL CABINET.
 - EXTEND (2) 4" EMPTY CONDUITS WITH PULLSTRING TO PROPERTY LINE FOR TELEPHONE SERVICE. COORDINATE ROUTING OF CONDUIT WITH TELEPHONE COMPANY.
 - (2) 4" EMPTY SPARE CONDUITS. REFER TO THE RISER DIAGRAM.
 - PROVIDE OUTLET FOR ELECTRIC WATER COOLER. VERIFY REQUIREMENTS PRIOR TO ROUGH-IN. PROVIDE GFI RECEPTACLE FOR ELECTRIC WATER COOLER. IF RECEPTACLE IS CONCEALED WITHIN WATER COOLER, PROVIDE GFI CIRCUIT BREAKER. VERIFY REQUIREMENTS PRIOR TO ROUGH-IN.
 - EXTEND (3) 2" TO PUBlix ELECTRICAL ROOM FOR FUTURE CIRCUITING.
 - PROVIDE CONNECTION TO VFD FOR EACH PUMP.
- GENERAL NOTES**
- CONTRACTOR SHALL MAINTAIN A MINIMUM 24" SEPARATION BETWEEN OUTLETS IN ALL FIRE RATED PARTITIONS.
 - ALL EXPOSED CONDUIT SHALL BE LOCATED WITHIN JOIST SPACE AREA OR ATTACHED DIRECTLY TO THE JOIST. CONDUIT SHALL NOT BE SUSPENDED FROM STRUCTURE.

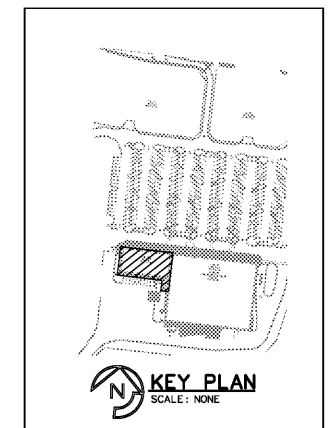

WMC EQUIPMENT SCHEDULE

UNIT DESIGNATION	WIRE AND CONDUIT		DISCONNECTING MEANS
	FEEDER	BRANCH	
RTU-1,2,3,4,5,6,7	3/4" WITH 3 #8, 1 #8 EG	3/4" WITH 3 #8, 1 #8 EG	60/2/250/NEC-3R
EF-1,2,3,4,5,6,7,8	1/2" WITH 2 #12, 1 #12 EG	1/2" WITH 2 #12, 1 #12 EG	TOGGLE SWITCH
UH-1	1/2" WITH 2 #10, 1 #10 EG	1/2" WITH 2 #10, 1 #10 EG	30/2/250/NEC-1
CD-1	1/2" WITH 2 #10, 1 #10 EG	1/2" WITH 2 #10, 1 #10 EG	WP 30A 2-POLE TOGGLE SW
AW-1	N/A	1/2" WITH 2 #12, 1 #12 FROM CD-1	2-POLE TOGGLE SW

GENERAL NOTES:
(1) EC IS ADVISED THAT FIRE RESISTER MAY BE REQUIRED.
(2) ELECTRICAL AND CONTROL CONDUCTORS SHALL BE INSIDE THE CURB OF

1925 Prospect Ave.
Orlando, FL 32814
P (407) 661-9100
F (407) 661-9101
www.cpe.com

CLIENT NAME
WindCrest Companies
605 E. Robinson Street, Suite 340
Orlando, Florida 32801

PROJECT NAME
Publix/Retail @ Lake Crossing
South Lake Drive & Platt Springs Road
Leesburg, South Carolina

REVISION SCHEDULE

No.	Description	Date
A	100% Final Submission	03/17/17
B	100% Public Submission	05/17/17
A	INTEGRATED FOR BUILD/INSTALL	06/10/17

DATE 03/17/17
DESIGNER SW
CHECKED CS
DATE 03/17/17

Job Number: 51207
Colwill Engineering
Consulting Engineers, Inc.
Engineering Business No. CO 2007-PE
3750 East Adams Drive, Tampa, Florida 33606
Tel: 813-841-9900 Fax: 813-841-9406
© 2017 ALL RIGHTS RESERVED

E200