


FOOTING SCHEDULE (2000 PSF)

MARK	SIZE	THICK	REINFORCING
F30	3'-0"	1'-0"	2" x 2" - 6" EACH WAY TOP AND BOTTOM

SOLS LABORATORY SHALL TEST SOIL BEARING PRESSURE AT CENTER OF EACH FOOTING PRIOR TO PLACING CONCRETE. STRUCTURAL FILL SUPPORTING SLAB OR FOOTINGS SHALL BE PLACED IN MAXIMUM 4" LIFTS WITH EACH 8" LIFT TESTED BY LABORATORY FOR COMPACTION LISTED IN GENERAL NOTES.

FOOTING SCHEDULE
SS03 NOT TO SCALE

1 FOUNDATION PLAN
SS03 SCALE: 3/8"=1'-0"

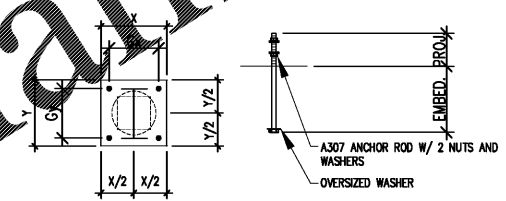


COLUMN	BASE PLATE		GAGE		ANCHOR ROD		
	THICK.	X	Y	Gx	Gy	DIA.	EMBD.
HSS4x4x1/4	3/4"	10"	10"	7"	7"	3/4"	8"
HSS8x4x1/4	3/4"	14"	10"	11"	7"	3/4"	8"

4 COLUMN BASE PLATE SCHEDULE
SS03 NOT TO SCALE

2 FRAMING PLAN
SS03 SCALE: 3/8"=1'-0"

Project
Sam's Mart
E. Independence Blvd.
Indian Trail, NC 28097

Owner
Sam's Mart
293 Church Place
Suite 200
Matthews, NC 28105

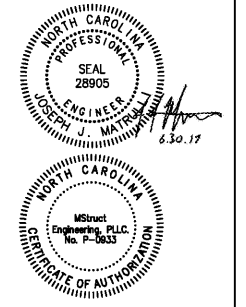

124 Floyd Smith Dr
Suite 375
Charlotte, NC 28262
Tel - 704 - 688-7500

7301 Rivers Avenue
Suite 188
North Charleston, SC 29406
Tel - 843 - 531-6848

www.R4architecture.com

Revision Date

Drawn By PJW
Checked By JJM
Issue Date 6-30-17
Project No 160345

Sheet Title
Vacuum/Vending
Enclosure Plans

Sheet Number
S503



MStruct
Structural Engineering Services, PLLC
Design • Inspection • Testing
1521 Nossau Blvd.
Charlotte, NC 28203
704.507.3099
www.mstruct.com
MStruct Job#: 124-16

WWW.DIline.com

Order Plans

ALL GEOMETRIC DIMENSIONS AND ELEVATIONS ARE UNLESS OTHERWISE SPECIFIED AND THE PROPERTY OF R4 ARCHITECTURE, P.A. ANY UNAUTHORIZED REPRODUCTION OR ALTERATION OF THESE DOCUMENTS IS STRICTLY PROHIBITED. CONTACT R4 ARCHITECTURE, P.A. AT 704-688-7500 FOR MORE INFORMATION.