

Hybrid

REACH-IN FREEZER/COOLER SHEET 1 OF 7

NEW Hybrid » Say Hy To reach-in cases

» a fusion of technology... a new window of opportunity

New Hybrid™ Reach-In Freezers and Coolers combine the selling power and reliability of a supermarket case with a remarkably easy-to-install, modular refrigeration system. Offering super flexibility our 2 to 5 door models provide a plug-and-play solution to enhance your food and beverage sales. And they're great for breakfast.

» less floor space... big advantage

3-door Hybrid™ Reach-In has the same capacity as a 3-door refrigerated case.

Hybrid™ Case Features include:

- 11 shelves for four cases
- 3-door Hybrid™ Reach-In has the same capacity as a 3-door refrigerated case.

REACH-IN FREEZER/COOLER SHEET 2 OF 7

EVOLUTION Quality Made Simple.

» refrigeration without complication

Installation is a breeze—Hybrid™ Reach-Ins are pre-wired and labeled to install with ease and reduce costs. Refrigerant is pre-charged and does not require brazing or evacuation. Using less refrigerant the reduced-charge system also runs more efficiently with lower BTUs and waste. Plus, connections are secure to virtually eliminate leak concerns.

Each case features pre-installed refrigeration piping with pre-charge, condenser coils, condenser fan, fan motor, and electrical connections. An integrated electrical control panel is pre-wired for easy installation.

Low and medium temp cases can be installed together for a complete offering.

REACH-IN FREEZER/COOLER SHEET 3 OF 7

Dollar Tree/Family Dollar Highlight™ Merchandiser Hybrid™ Specs

Medium and Low Temp Hybrid™ Reach-Ins with 30" x 68" Doors. RHCC30 & RHCC30

Note: Electrical specs for Zero Zone display cases manufactured for shipment within the U.S. from January 2008, RHCC30 and RHCC30 energy requirements. "Zero Zone Hybrid™" is subject to change without notice.

PHYSICAL DATA	Medium Temp						Low Temp	
	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	
Range (ft.)	55	55	55	55	55	55	55	
Flange (ft.)	56	56	56	56	56	56	56	
Shelf Depth (in.)	24	24	24	24	24	24	24	
Weight (lbs.)	828	1,078	1,288	1,698	1,078	1,078	1,698	

ELECTRICAL DATA 1, 2, 3, 4, 5	WITH CONDENSATE EVAPORATION SYSTEM						WITHOUT CONDENSATE EVAPORATION SYSTEM	
	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	
FRCCP (amps)	15	15	15	15	15	15	15	
MCA (amps)	33	33	33	33	33	33	33	


ENERGY DATA	WITH CONDENSATE EVAPORATION SYSTEM						WITHOUT CONDENSATE EVAPORATION SYSTEM	
	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	
FRCCP (amps)	15	15	15	15	15	15	15	
MCA (amps)	33	33	33	33	33	33	33	

R-404A CHARGE	WITH CONDENSATE EVAPORATION SYSTEM						WITHOUT CONDENSATE EVAPORATION SYSTEM	
	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	
FRCCP (amps)	15	15	15	15	15	15	15	
MCA (amps)	33	33	33	33	33	33	33	


REFRIGERATION	WITH CONDENSATE EVAPORATION SYSTEM						WITHOUT CONDENSATE EVAPORATION SYSTEM	
	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	
FRCCP (amps)	15	15	15	15	15	15	15	
MCA (amps)	33	33	33	33	33	33	33	

REGULATORY DATA	WITH CONDENSATE EVAPORATION SYSTEM						WITHOUT CONDENSATE EVAPORATION SYSTEM	
	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	RHCC30	
FRCCP (amps)	15	15	15	15	15	15	15	
MCA (amps)	33	33	33	33	33	33	33	


REACH-IN FREEZER/COOLER SHEET 4 OF 7

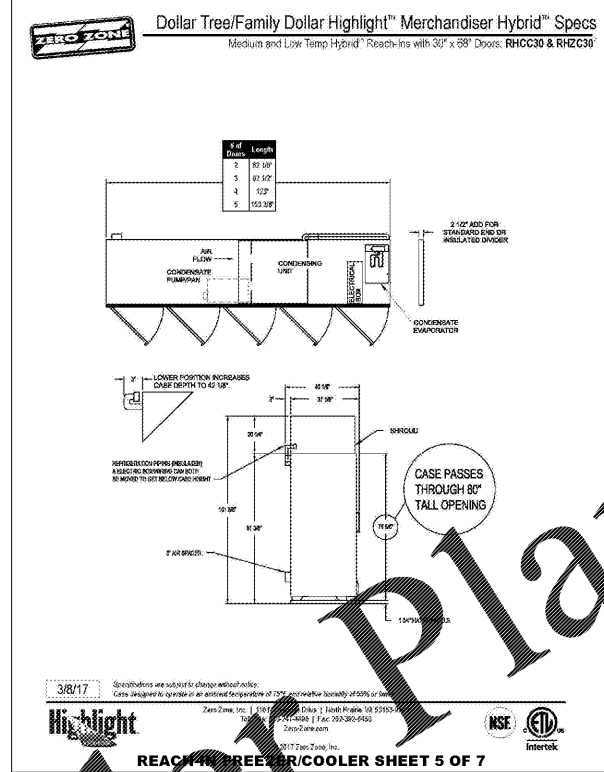

REACH-IN FREEZER/COOLER SHEET 5 OF 7

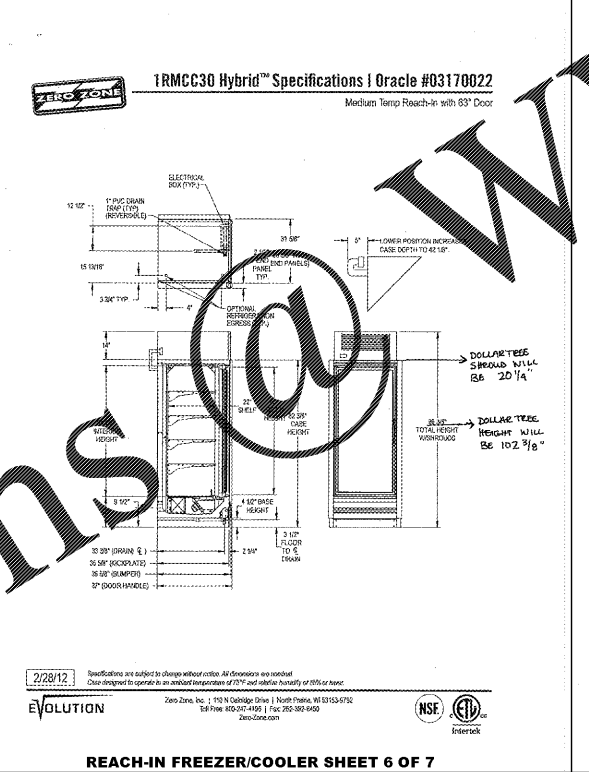

REACH-IN FREEZER/COOLER SHEET 6 OF 7

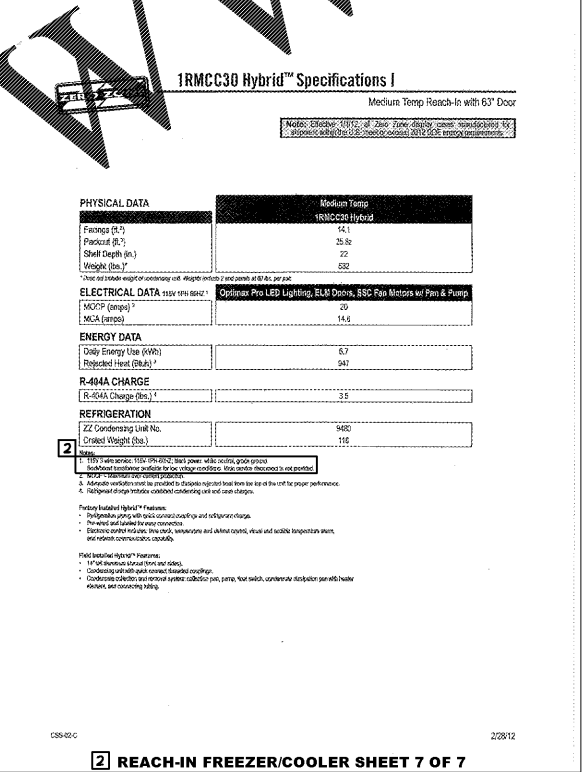

REACH-IN FREEZER/COOLER SHEET 7 OF 7

Order Plans @ www.dollarplans.com

WWW.DOLLARPLANS.COM

date	project	designed	drawn	checked
06/04/09	36409	RK	RK	DB



FOR INFORMATION ONLY NO SIGNATURE REQUIRED

FIGURE 314-24-1000

project
drawing
DOLLAR TREE
SALEM B'TS
801 SENECAL BLVD. SALEM, MO 65660
REACH-IN UNIT DETAILS AND SPECIFICATIONS

DS1