

MECHANICAL CONTRACTORS' NOTES

- THIS PLAN SHOWS ONLY THE REQUIREMENTS FOR EQUIPMENT BEING FURNISHED BY MULTIPLE VENDORS. FOR ALL OTHER REQUIREMENTS, REFER TO ARCHITECTURAL & ENGINEERING DRAWINGS.
- ALL WORK TO BE IN COMPLIANCE WITH PREVALENT CODES.
- WATER AND DRAIN LINES TO BE INSIDE OF WALLS. SURFACE-MOUNTED WORK IS NOT ACCEPTABLE.
- ALL PLUMBING CONNECTION HEIGHTS ARE TO CENTERLINE OF ROUGH-IN UNLESS NOTED OTHERWISE.
- ALL WATER LINES TO BE VALVED AT STUB-UP LOCATIONS.
- PLUMBING CONTRACTOR TO PROVIDE AND INSTALL WATER HAMMER ARRESTORS IN LINE BEFORE ALL SOLID VALVES, I.E. AT DISHWASHER, DISPENSERS, ICE MAKERS, STEAMERS, ETC.
- PLUMBING CONTRACTOR TO PROVIDE AND INSTALL ALL INDIRECT WASTE LINES (A. WALK-IN COOLERS/FREEZERS, REFRIGERATED CASES, HOT WELLS).
- INSULATE ALL WATER LINES RUNNING FROM WATER HEATER TO FINAL HOOK-UP ON EQUIPMENT.
- PLUMBING CONTRACTOR TO MOUNT ALL DISPOSERS, FAUCETS, BASKET DRAIN, TOWN EQUIPMENT WITH FINAL CONNECTION TO ROUGH-IN AFTER EQUIPMENT IS SET IN PLACE.
- COOKING EQUIPMENT GAS PRESSURE TO BE 7-1/2" W.C. FOR NATURAL GAS AND 10" W.C. FOR LP GAS.
- PLUMBING CONTRACTOR TO PROVIDE AND INSTALL A GAS SOLID VALVE WITH INTERLOCK TO EXHAUST VENTILATOR FIRE PROTECTION SYSTEM.
- PLUMBING CONTRACTOR TO PROVIDE AND INSTALL A CHECK VALVE IN GAS SERVICE WATER SUPPLY LINE.
- BEVERAGE CONDUIT TO BE PROVIDED WITH SMOOTH INTERIOR AND ONE MINIMUM 1/2" RADIUS SWEEP BEND AT EACH END. PIPING TO BE SEALED USING CONDUIT JOINT. SHORT RADIIUS FACTORY "ELLS" ARE NOT ACCEPTABLE.
- PLUMBING CONTRACTOR TO PROVIDE AND INSTALL WATER HEATER.
- DIMENSIONS TAKEN FROM GRID LINES OR FINISHED FACE OF WALL.


PLUMBING SYMBOLS

HW	HOT WATER & COLD WATER SUPPLY
DW	DIRECT WASTE CONNECTION
FD	FLOOR DRAIN
TFD	TELL-TALE FLOOR DRAIN
FFD	FLOOR DRAIN WITH FUNNEL
FDS	FLOOR DRAIN WITH SLOPE
FS	FLOOR SINK WITH 1/2" GRATE
FS	FLOOR SINK WITH FULL GRATE
GS	GAS SUPPLY LINE STUB
R	REFRIGERATION LINES (SPLIT & SECTION)
REV	BEVERAGE CONDUIT
FC	FIELD CONNECTION
IW	INDIRECT WASTE
PC	PLUMBING CONTRACTOR
AF	ABOVE FINISHED FLOOR


NOTE:
ALL CONNECTIONS SHOWN ON WALLS ARE TO BE CONCEALED IN WALL CAVITY UNLESS NOTED OTHERWISE.

UNDERFLOOR CONDUIT NOTES

- THE GENERAL CONTRACTOR IS RESPONSIBLE FOR VERIFYING IF P.V.C. IS AN ACCEPTABLE UNDERFLOOR MATERIAL. GENERAL CONTRACTOR (OR HIS SUB-CONTRACTOR) IS ALSO RESPONSIBLE FOR FURNISHING AND INSTALLING ALL APPROVED MATERIALS.
- ABOVE CEILING ROUTES MUST BE COORDINATED WITH PLENUM AND NON-PLENUM CEILINGS.
- STUB-UP LOCATIONS ARE TO BE OBSERVED, BUT UNDERFLOOR ROUTES ARE APPROXIMATE. IN CASE OF BUNGATH ISLAND IN FURNISHING, THE GENERAL CONTRACTOR SHALL USE MORE SWEEP 7/8" FOR REROUTING IF STUB LOCATION CHANGES ARE NECESSARY. THE GENERAL CONTRACTOR MUST INFORM DESIGNER BEFORE PROCEEDING WITH ANY WORK.
- THE GENERAL CONTRACTOR IS RESPONSIBLE FOR FURNISHING AND INSTALLING SEALANT TO STUB OPENINGS AFTER BEVERAGE LINES HAVE BEEN INSTALLED.
- ALL DIMENSIONS ARE TO THE CENTERLINE OF THE STUB-UP.

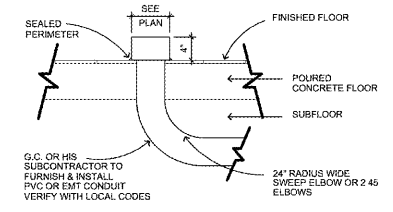

UNDERFLOOR CONDUIT DETAIL
NO SCALE

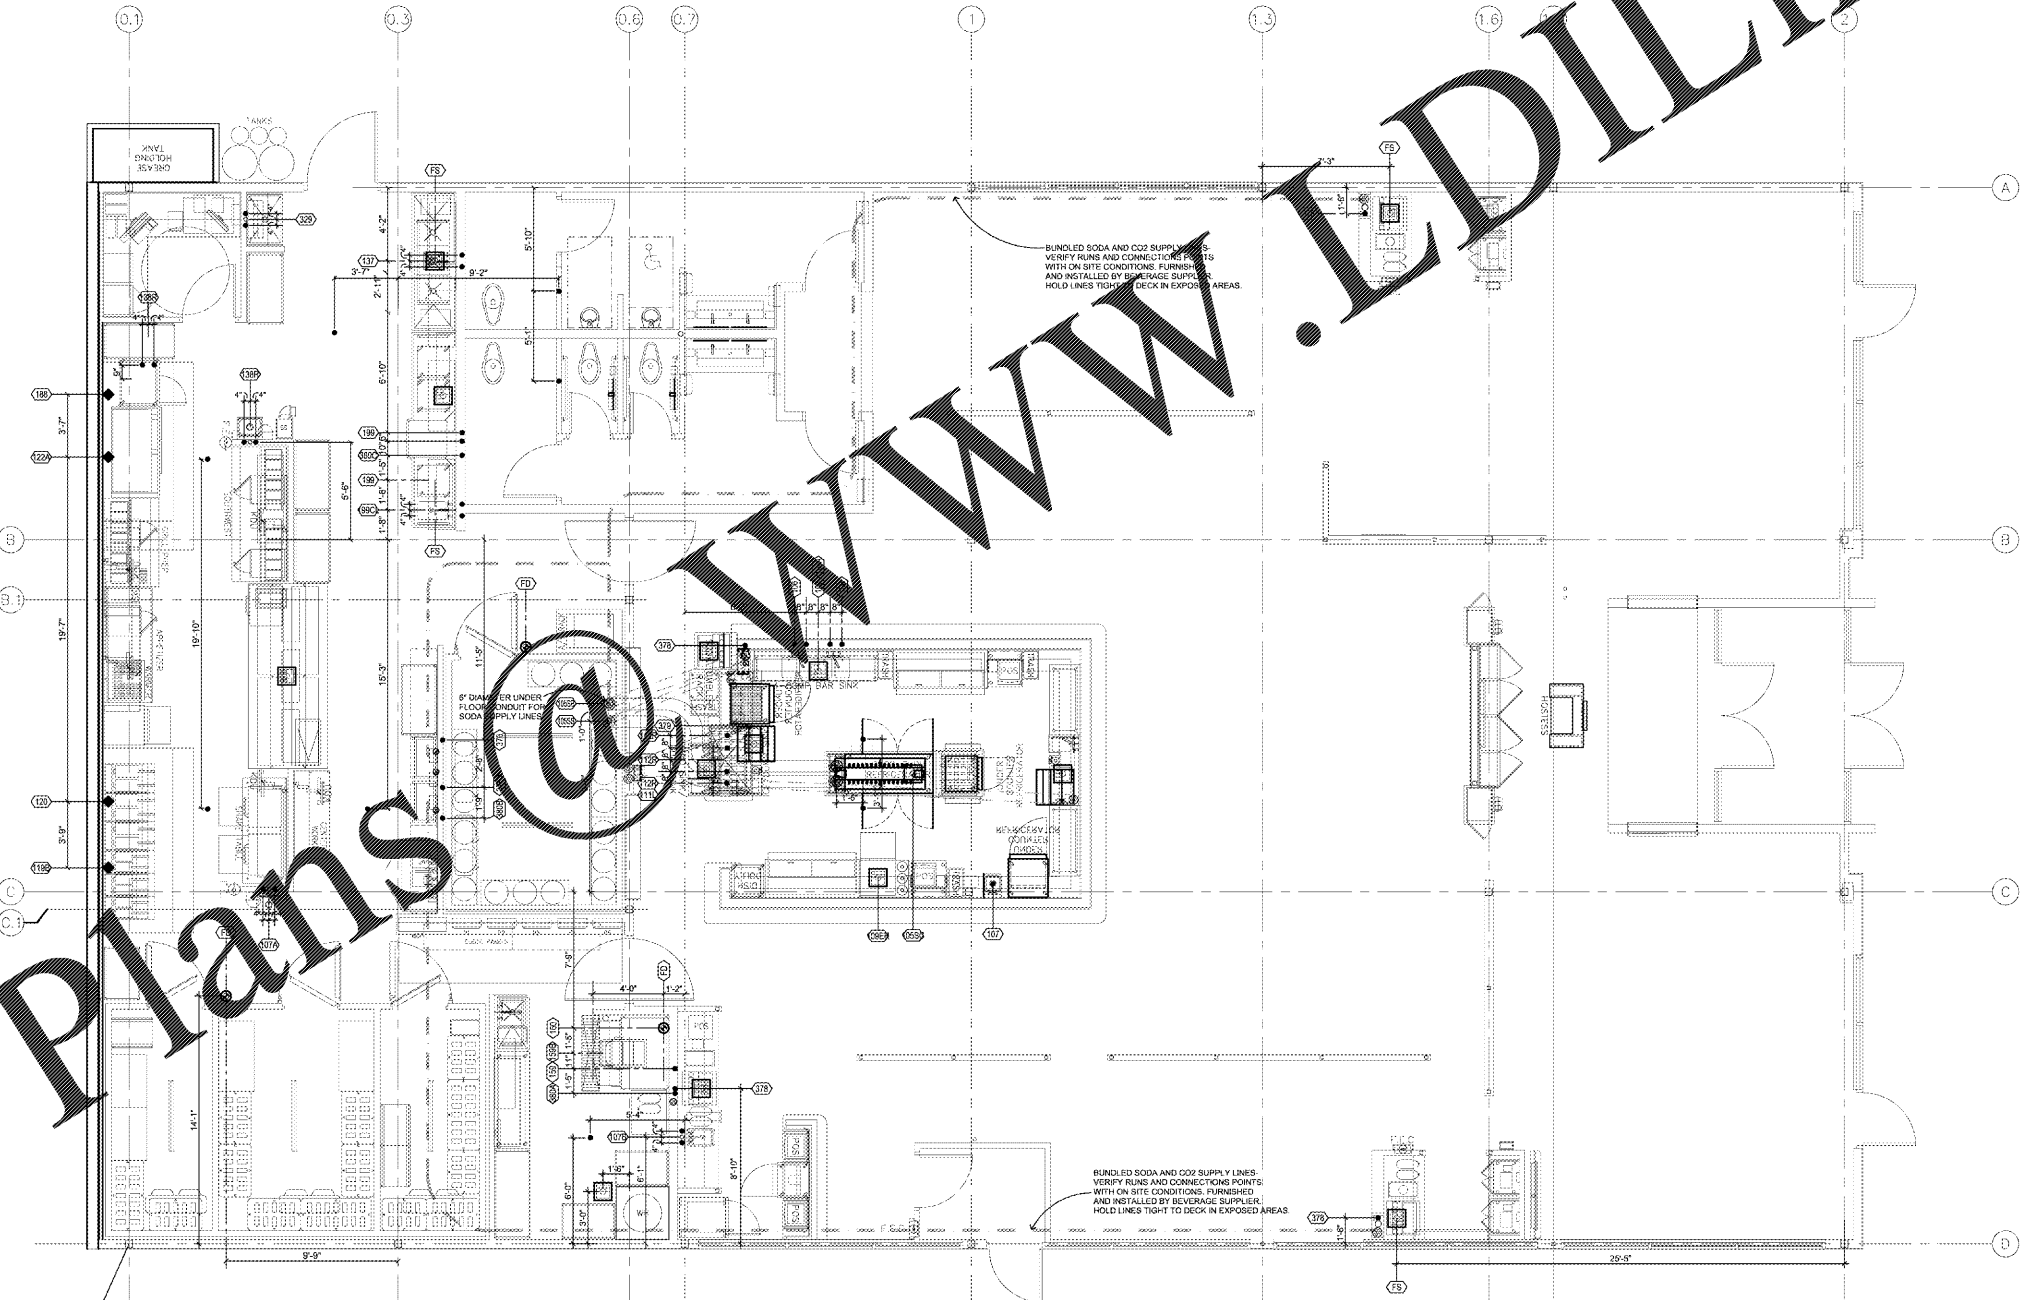

Order Plans @ www.EDLine.com

CERTIFICATION

PRANGER GROUP INC.
PROJECT MANAGER

PROJECT NUMBER
5748

BUFFALO WILD WINGS
BIRMINGHAM
1416 4th AVENUE SOUTH,
BIRMINGHAM, AL 35233



NO.	DESCRIPTION	DRAWING ISSUE	
		DATE	ISSUE
1			
2			
3			
4			
5			
6			
7			

Drawing Title
PLUMBING ROUGH IN PLAN