

MATERIAL SYMBOLS

Table with 2 columns: Material Name and Symbol. Includes Wood, Wood Finish, Aluminum, Steel, Earth, Concrete, Gypsum-Plaster, Masonry-Concrete Block, Rigid Insulation, Batt Insulation, Plywood.

ABBREVIATIONS

Table with 2 columns: Abbreviation and Full Name. Includes AFF (Above Finished Floor), ALUM (Aluminum), BOT (Bottom), BUR (Built-Up Roofing), CIP (Cast-in-Place), etc.

GENERAL NOTES

A. DRAWINGS AND SPECIFICATIONS ARE INTENDED TO BE COMPLEMENTARY... B. CONTRACTOR TO VISIT THE SITE DURING BIDDING... C. LAYOUT OF WORK... D. EXAMINATION... E. CODES AND STANDARDS... F. DEMOLITION... G. ALL WORK SHALL BE PERFORMED IN CONFORMANCE WITH APPLICABLE STANDARD SPECIFICATIONS...

PROJECT DATA

Table with 2 columns: Field Name and Value. Includes Client (Overton Brooks VA Medical Center), Project Name (Renovate Pharmacy Clean Room USP 797), Project Address (510 E. Stoner Ave., Shreveport, LA 71101), Occupancy Type (Health Care 1-2), Project Gross Floor Area (480 SF), Height Above Ground, Number of Stories, Type of Construction (NFPA I(332) IBC IA).

PROJECT DESCRIPTION

THE RENOVATE PHARMACY CLEAN ROOM (USP797) PROJECT INCLUDES RENOVATION OF APPROXIMATELY 500 SQUARE FEET OF AREA WITHIN THE EXISTING PHARMACY DEPARTMENT AT THE OVERTON BROOKS VA MEDICAL CENTER. THE WORK GENERALLY INCLUDES BUT IS NOT LIMITED TO: 1. INSTALLATION OF TEMPORARY PARTITIONS, DOOR AND OTHER PROTECTIVE MEASURES TO ISOLATE THE CONSTRUCTION AREA...

GRAPHIC SYMBOLS


Table with 2 columns: Symbol Name and Symbol. Includes ENLARGED PLAN / DETAIL REFERENCE, GLAZING TYPE TAG, INTERIOR ELEVATION, SPOT ELEVATION, FLOOR LINES IN EXTERIOR ELEVATION, CENTER, PROPERTY LINE, BOUNDARY LINES, MATCH LINE, BREAK LINE, REVISION, REVISION CLOUD, CENTERLINE, DOOR TAG, PARTITION TAG, VIEW / DETAIL TITLE, SECTION / DETAIL, BUILDING SECTION, WALL SECTION, BUILDING ELEVATION, NORTH ARROW, LEVEL ANNOTATION, COLUMN GRID TAG, EQUIPMENT TAG, ROOM TAG, ROOM FINISH TAG, FINISH MATERIAL TAG, PARTITION WITH CORNER GUARD, PARTITION WITH WALL GUARD, PARTITION WITH END CAP, PARTITION WITH ADDITIONAL BRACING.

CODES

2012: INTERNATIONAL BUILDING CODE, NO LOCAL AMENDMENTS. 2003: NFPA 70, NATIONAL ELECTRICAL CODE. 2003: IPC INTERNATIONAL PLUMBING CODE, NO LOCAL AMENDMENTS. 2006: IMC INTERNATIONAL MECHANICAL CODE, NO LOCAL AMENDMENTS. 2003: ICC / ANS I 117.1 - 2003 AMERICAN NATIONAL STANDARD FOR ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES. AMERICANS WITH DISABILITIES ACT, 28 CFR PART 36, NON - DISCRIMINATION ON THE BASIS OF DISABILITY BY PUBLIC ACCOMMODATIONS AND IN COMMERCIAL FACILITIES; FINAL RULE, DATED JULY 26, 1991. OCCUPATIONAL SAFETY AND HEALTH STANDARDS, U.S. DEPARTMENT OF LABOR (OSHA); 29 CFR, PART 1926, AS AMENDED, INCLUDING FINAL RULE. NFPA 101, LIFE SAFETY CODE FOR LOCAL JURISDICTION COMPLIANCE. NFPA 101, LIFE SAFETY CODE FOR FEDERAL CERTIFICATION. (COMPLY WITH THE MOST RESTRICTIVE REQUIREMENTS IF THESE TWO NFPA 101 STANDARDS CONFLICT). 2005: NFPA 99, HEALTH CARE FACILITIES. 2004: NFPA 241, CONSTRUCTION, ALTERATION, AND DEMOLITION OPERATIONS. GUIDELINES FOR DESIGN AND CONSTRUCTION OF HEALTH CARE FACILITIES, FACILITIES GUIDELINES INSTITUTE. JOINT COMMISSION FOR ACCREDITATION OF HEALTHCARE ORGANIZATIONS (JCAHO), STANDARD EC5.50, INTERIM LIFE SAFETY MEASURES (ILSM), AS PUBLISHED IN THE COMPREHENSIVE ACCREDITATION MANUAL FOR HOSPITALS: THE OFFICIAL HANDBOOK (CAMH), 2004 EDITION.

GENERAL SCHEDULING NOTE TO CONTRACTOR

1. WORK FOR EACH AREA IS TO BE COORDINATED WITH THE OOR OR PROJECT ENGINEER. THE BUILDING SHALL REMAIN OCCUPIED THROUGHOUT CONSTRUCTION. WORK SHALL BE ARRANGED TO ALLOW AS LITTLE INTERRUPTION AND INCONVENIENCE AS POSSIBLE. 2. THE CONTRACTOR IS TO SUBMIT A WRITTEN SCHEDULE OF WORK TO THE COR FOR APPROVAL WHICH DETAILS CONSTRUCTION START AND CONSTRUCTION COMPLETION FOR EACH AREA. SCHEDULE OF WORK SHALL BE SUBMITTED AND APPROVED BY THE COR PRIOR TO STARTING ANY WORK ACTIVITIES.

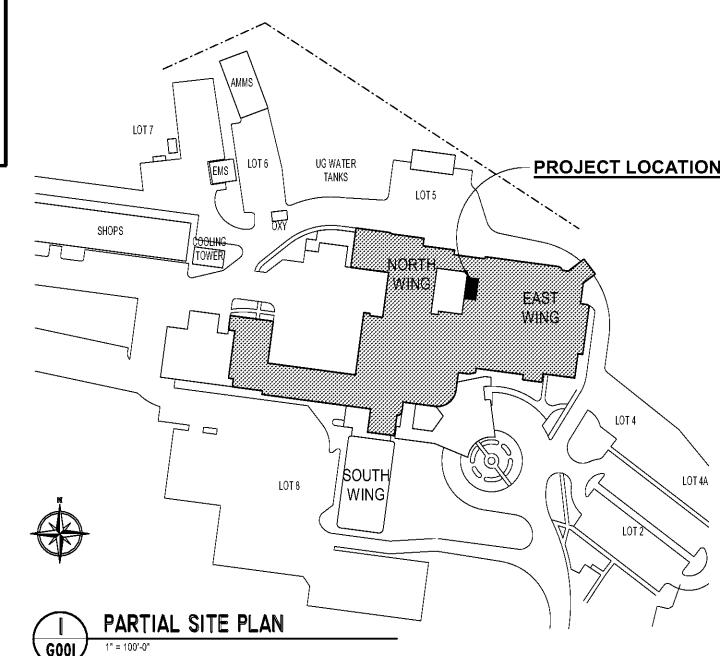

Order Plans @

Project information table including Consultant (EYP/1111 Louisiana, 26th Floor, Houston, TX 77002), Architect/Engineer of Record (LA LACHIN Architects, APC), Office of Construction and Facilities Management, Project Title (RENOVATE PHARMACY CLEAN ROOM (USP 797)), Project Number (667-17-108), Building Number (1), Drawing Number (G001), Issue Date (October 5, 2017), Checked (PF), Drawn (BB).

Vertical text on the left margin: N:\Lachin\Ch... 10/05/2017 12:33:03 AM