



**Chick-fil-A**  
5200 Buffington Road  
Atlanta, Georgia 30349-2998

**INTERPLAN**  
ARCHITECTURE  
ENGINEERING  
INTERIOR DESIGN  
PROJECT MANAGEMENT

604 COURTLAND STREET SUITE 100  
ORLANDO, FLORIDA 32804  
PH 407.645.5008  
FX 407.629.9124

SEAL: THIS SHEET IS NOT FOR CONSTRUCTION. PLEASE THE ARCHITECT OR ENGINEER SIGNATURE AND SEAL APPEAR BELOW.

**CHICK-FIL-A**  
SAR South Cobb Drive FSR  
3100 South Cobb Dr SE, Smyrna, GA 30080

**FSR# 00810**

REVISION SCHEDULE

NO. DATE DESCRIPTION

CONSULTANT PROJECT # 2017.0165

PRINTED FOR THE BID

DATE September 09, 2017


DRAWN BY AD

INFORMATION CONTAINED ON THIS DRAWING IS THE PROPERTY OF INTERPLAN. IT IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREON. ANY REUSE OR MODIFICATION OF THIS DRAWING WITHOUT THE WRITTEN PERMISSION OF INTERPLAN IS STRICTLY PROHIBITED.

SHEET FLOOR PLAN

SHEET NUMBER

**A-201L**

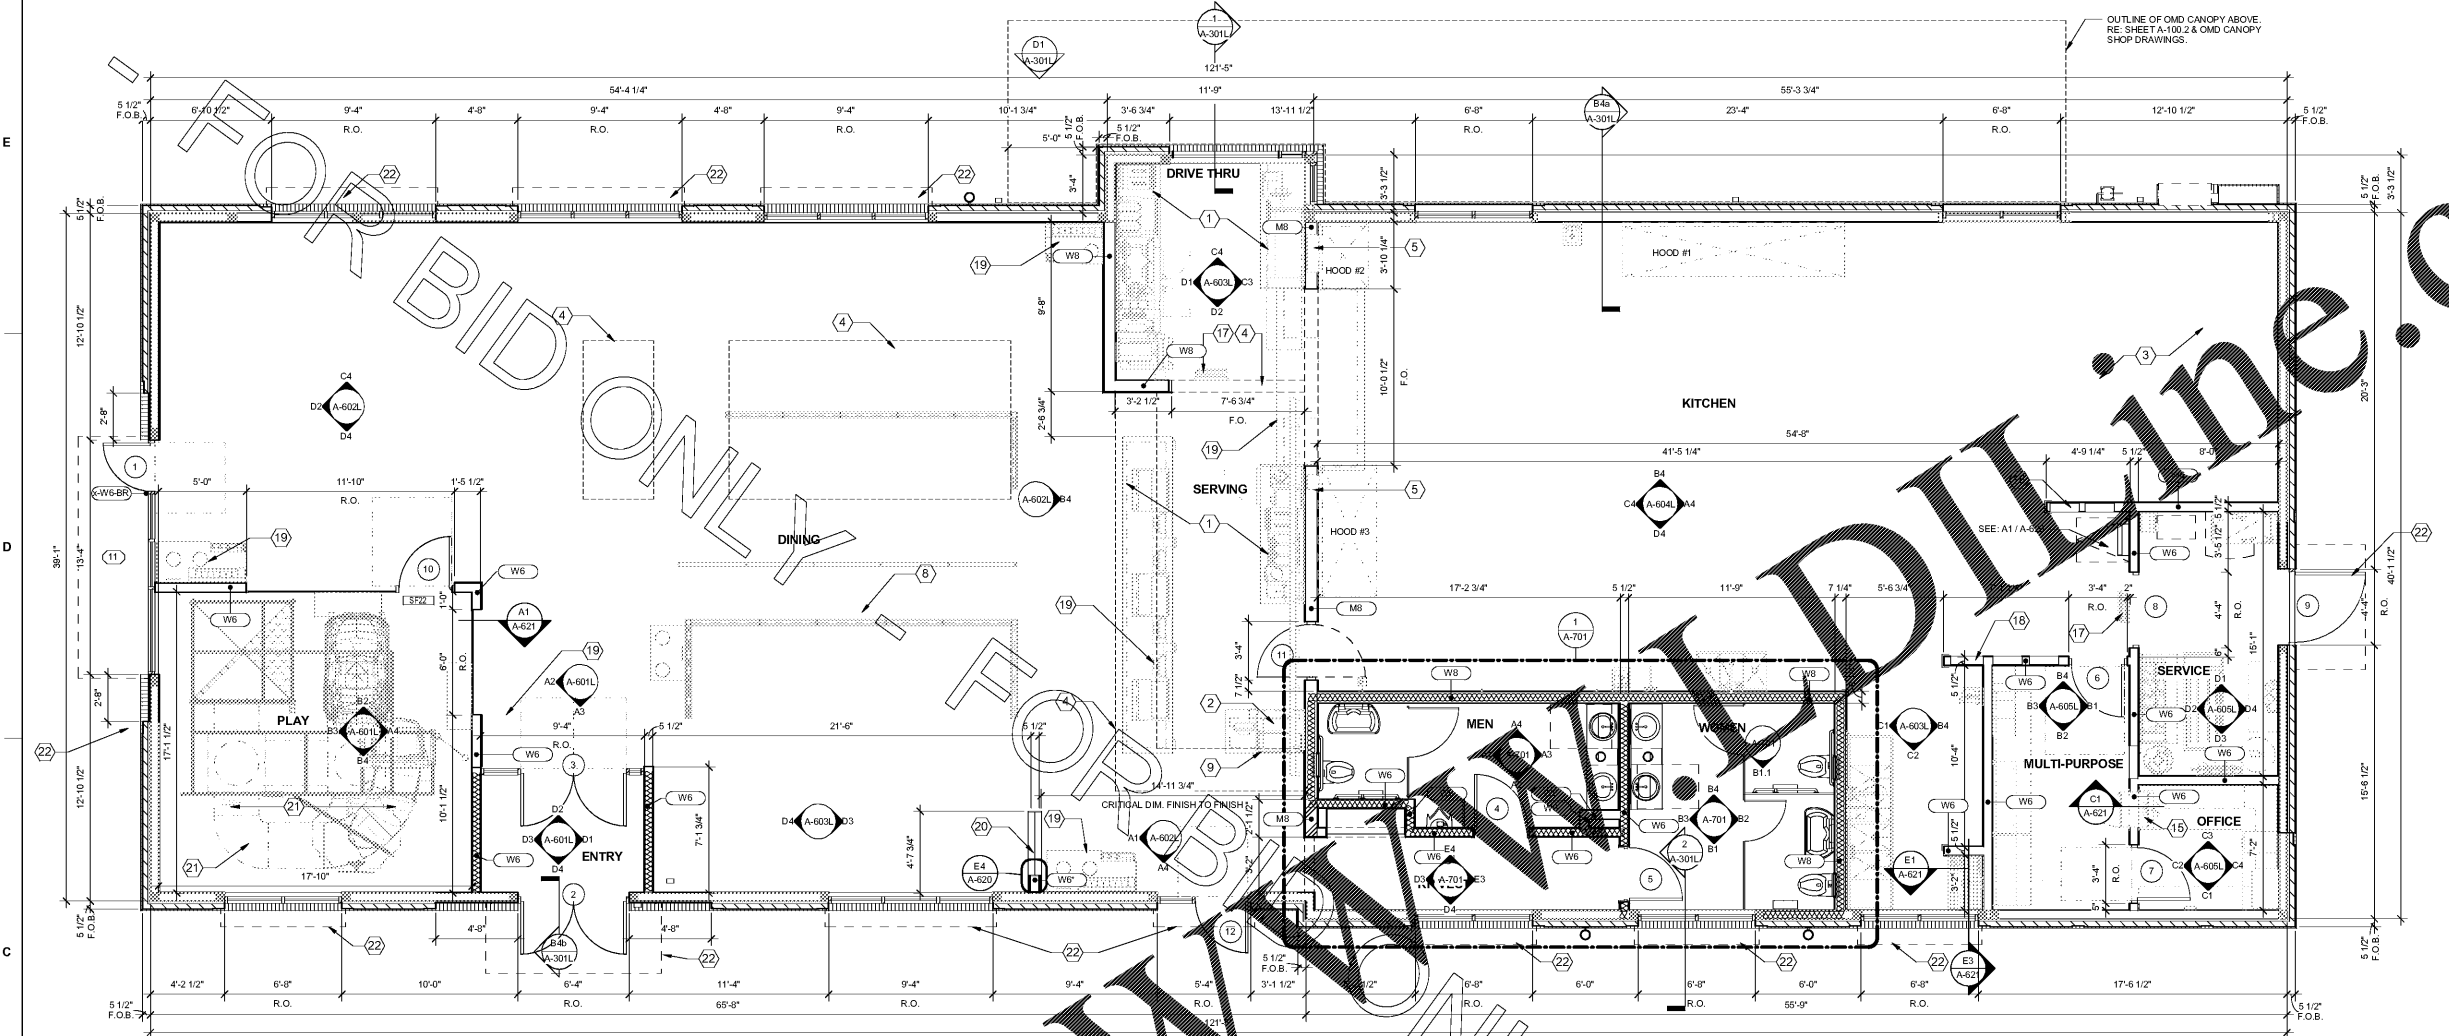

**C1 FLOOR PLAN**  
1/4" = 1'-0"

**WALL TYPE SCHEDULE - INTERIOR**

| MARK | DESCRIPTION (DOES NOT INCLUDE FINISHES)   |
|------|---|
| W1   | 2" MIN. G.C. MAX. WITH ONE LAYER 1/2" SHEATHING EA EXPOSED SIDE                                       |
| W2   | 2x4 W/ STUDS @ 16" O.C. MAX. WITH ONE LAYER 1/2" SHEATHING EA EXPOSED SIDE                            |
| W3   | WOOD STUDS @ 16" O.C. MAX. WITH ONE LAYER 1/2" SHEATHING EA EXPOSED SIDE                              |
| W4   | 2x6 W/ STUDS @ 16" O.C. MAX. WITH ONE LAYER 3/4" PLYWOOD SHEATHING EA EXPOSED SIDE AT STEEL ICON WALL |
| W5   | WOOD STUDS @ 16" O.C. MAX. WITH ONE LAYER 1/2" SHEATHING EA EXPOSED SIDE                              |

**FLOOR PLAN WALL & PARTITION LEGEND**

- BATT INSULATION
  - WOOD STUD WALL
  - METAL STUD WALL
- NOTE: SEE WALL & PARTITION TYPES AND SMOKE BARRIER INDICATED ON REFLECTED CEILING PLAN FOR ADDITIONAL INFORMATION

**STATISTICS - LRG (NET)**

| SQUARE FOOTAGE BREAKDOWNS: | Area    |
|----------------------------|---------|
| SERVING                    | 252 SF  |
| ENTRY                      | 62 SF   |
| PLAY                       | 302 SF  |
| RR VEST                    | 82 SF   |
| DINING                     | 1723 SF |
| DRIVE-THRU                 | 137 SF  |
| KITCHEN                    | 1458 SF |
| MULTI-PURPOSE              | 110 SF  |
| OFFICE                     | 57 SF   |
| SERVICE                    | 120 SF  |
| WOMEN                      | 138 SF  |
| MEN                        | 109 SF  |
| Net Total:                 | 4540 SF |

Gross Footprint: 4995 SF

NOTE: SQUARE FOOTAGE INDICATED IN STATISTICS IS NET SQUARE FOOTAGE AND DOES NOT INCLUDE INTERIOR OR EXTERIOR WALLS. REFER TO FOOTPRINT FOR GROSS SQUARE FOOTAGE.

**FLOOR PLAN GENERAL NOTES**

- A.1 DIMENSIONS ARE FROM FACE OF STUD TO FACE OF STUD (UNLESS OTHERWISE NOTED).
- A.2 FASTENERS, ANCHORS, CLIPS, STRAPS, ETC WHICH ARE IN CONTACT WITH PRESERVATIVE AND/OR FIRE TREATED WOOD SHALL BE OF G-185 HOT DIPPED ZINC-COATED GALVANIZED STEEL, STAINLESS STEEL, OR AN APPROVED EQUAL.
- A.3 REFER TO CIVIL AND LANDSCAPE FOR LOCATIONS OF WALKS, BOLLARDS, LANDSCAPING AREAS, ALGS POLE, AND OTHER SITE ITEMS.
- A.4 REFER TO INTERIOR ELEVATIONS FOR LOCATIONS AND TYPES OF CORNER GUARDS.
- A.5 CONTRACTOR TO COORDINATE LOCATION OF POLE MOUNTED EXTERIOR CAMERA WITH STRONG SYSTEMS AND INSTALL UNDERGROUND CONDUIT AS REQUIRED. RE ELECTRICAL.
- A.6 REFER TO ACCESSIBILITY PLAN AND FURNITURE DRAWINGS FOR SEATING LAYOUT & SPECIFICATIONS. CONTACT OWNER.
- A.7 REFER TO ACCESSIBILITY PLAN AND OWNER DRAWINGS FOR CONDIMENT COUNTERS AND TRASH RECEPTACLES.

**FLOORPLAN KEYNOTES - LRG**

- 1 GC SHALL PROVIDE 5-1/2" HIGH CONCRETE MILLWORK CURBS. RE: OWNER SHOP DRAWINGS FOR EXACT LOCATIONS & DIMENSIONS.
- 2 SECURE SAFE USING (4) HLT HASSE 1/2" x 4-1/2" ANCHOR BOLTS WITH HLT HVU ADHESIVE CAPSULE. AT EACH HOLE FASTEN THRU PHENOLIC BASE OF CABINET AND INTO CONCRETE CURB BELOW. VERIFY LOCATION WITH SAFE MANUFACTURER. G.C. TO COORDINATE WITH EQUIPMENT INSTALLER.
- 3 FREEZER AND COOLER DOORS AND HARDWARE SUPPLIED BY FREEZER/COOLER MANUFACTURER.
- 4 DASHED LINE INDICATES SOFFIT OR BULKHEAD ABOVE. RE: REFLECTED CEILING PLAN.
- 5 RECESSED PIN AND SLEEVE BOX, RE: 11A4.2 & ELECTRICAL. 2-1/4" ROUGH OPENING WIDTH AT HOOD #2. 11" ROUGH OPENING WIDTH AT HOOD #3.
- 8 STEEL WALL BY OWNER (TYP.) RE: OWNER FOR EXACT LOCATION.
- 9 SAFE SCREEN BY OWNER.
- 15 NETWORK CABINET.
- 17 FLY LIGHT. RE: INTERIOR ELEVATIONS, RCP, KITCHEN, AND ELECTRICAL DRAWINGS FOR ADDITIONAL FLY LIGHTS THAT ARE TOO HIGH ABOVE FLOOR TO SHOW ON FLOOR PLAN.
- 18 ELECTRICAL PANEL. RE: ELECTRICAL.
- 19 ITEM BY OWNER.
- 20 2-SIDED ICON. RE: OWNER DRAWINGS.
- 21 PLAY AREA EQUIPMENT BY OWNER.
- 22 CANOPY ABOVE BY OWNER.

**WALL NOTES**

- WALL INSULATION NOTES**
- B.1 WHERE EXTERIOR METAL STUD WALL TYPE REQUIRES BATT INSULATION, USE R-19 FOIL FACED BATT INSULATION.
  - B.2 WHERE EXTERIOR WOOD STUD WALL REQUIRES BATT INSULATION, USE R-19 RAFT FACED FIBERGLASS BATT INSULATION WITH FLAME SPREAD INDEX OF NOT MORE THAN 25 AND SMOKE DEVELOPED INDEX OF NOT MORE THAN 450.
  - B.3 WHERE EXTERIOR STUD WALLS REQUIRE BATT INSULATION, EXTEND INSULATION UP 12" ABOVE ROOFTOP RIGID INSULATION.
  - B.4 AT INTERIOR METAL STUD WALLS WHERE INSULATION IS SCHEDULED, USE 3-1/2" FOIL FACED BATT INSULATION.
  - B.5 AT INTERIOR WOOD STUD WALLS WHERE INSULATION IS SCHEDULED, USE 3-1/2" BATT INSULATION WITH MAXIMUM FLAME SPREAD INDEX OF 25.
  - B.6 NOT USED.
- INTERIOR WALL FRAMING NOTES**
- C.1 UNLESS NOTED OTHERWISE, EXTEND FRAMING TO 6" ABOVE ADJACENT CEILING.
  - C.2 AT SMOKE PARTITION INTERIOR WALLS, EXTEND FRAMING TO ROOF DECK AS REQUIRED TO ACCOMMODATE SMOKE BARRIER.
  - C.3 WHERE INTERIOR WALLS ARE NOT INSULATED AND NOT A SMOKE PARTITION, FRAMING MAY STOP 6" ABOVE HIGHEST ADJACENT FINISH CEILING.
  - C.4 WHERE INTERIOR WALL FRAMING DOES NOT EXTEND TO STRUCTURE ABOVE, BRACE INTERIOR WALLS AS REQUIRED FOR COMPLIANCE WITH INTERNATIONAL BUILDING CODE 2012 EDITION, SECTION 2008.9.
  - C.5 FRAMING NOT NON-LOADBEARING INTERIOR WALLS SHALL MEET REQUIREMENTS OF APPLICABLE BUILDING CODES AND LOCAL AMENDMENTS.
- EXTERIOR WALL FRAMING NOTES**
- D.1 SEE STRUCTURAL DRAWINGS FOR STUD DIMENSIONS AND SPACING.
  - D.2 AT WOOD STUD EXTERIOR WALLS, USE TREATED SILL PLATES.
- EXTERIOR SHEATHING NOTES**
- E.1 REFER TO STRUCTURAL FOR EXTERIOR SHEATHING TYPES.

**BLOCKING NOTES**

- F.1 WALL BLOCKING SHALL BE THE GENERAL CONTRACTOR'S RESPONSIBILITY. BLOCKING SHALL INCLUDE, BUT IS NOT LIMITED TO: AREAS INDICATED ON INTERIOR ELEVATIONS FOR GRAB BARS, SHELVING BRACKETS, MONITORS, FIXTURES, ETC. AS WELL AS BLOCKING FOR WOODS, CANOPIES ROOF FRAMING, ROOF TOP UNITS, ETC.

**INTERIOR WALL FINISH & INTERIOR SHEATHING NOTES**

- G.1 AT MATERIALS LABELED "INTERIOR SHEATHING" ON WALL TYPE DRAWINGS AND DETAILS, SHEATHING SHALL BE AS FOLLOWS UNLESS NOTED OTHERWISE. REFER TO FINISH PLAN AND INTERIOR ELEVATIONS FOR FINISH MATERIAL ON INTERIOR SHEATHING. DO NOT USE WOOD SHEATHING WITHIN 18" OF HOODS.
  - G.2 WHERE SHEATHING IS EXPOSED: 1/2" GYPSUM BOARD, PAINTED PER INTERIOR ELEVATIONS AND FINISH PLAN.
  - G.3 BETWEEN WALL TILE AND STUDS: 1/2" CEMENTITIOUS BACKER BOARD.
  - G.4 BETWEEN FRP PANELS AND WOOD STUDS AT BACK OF HOUSE: COMPOSITE GOLD 40 MIL WATERPROOF MEMBRANE AND 1/2" CEMENTITIOUS BOARD TO 1'-0" ABOVE CEILING. RE: TYPICAL WALL BASE DETAIL.
  - G.5 BETWEEN FRP PANELS AND METAL STUDS: COMPOSITE GOLD 40 MIL WATERPROOF MEMBRANE AND 1/2" CEMENTITIOUS BOARD TO 1'-0" ABOVE SLAB. 1/2" CEMENTITIOUS BOARD TO 4" ABOVE CEILING, EXCEPT AT AREAS WHERE DRAFT STOPPING IS REQUIRED. REFER TO DRAFT STOPPING DETAILS FOR THESE AREAS.
  - G.6 BETWEEN STAINLESS STEEL PANELS AND WOOD STUDS: 1/2" CEMENTITIOUS BOARD.
  - G.7 BETWEEN STAINLESS STEEL PANELS AND METAL STUDS: 1/2" CEMENTITIOUS BOARD.
  - G.8 BETWEEN WALLCOVERING AND STUDS: 1/2" GYPSUM BOARD.
  - G.9 BETWEEN WOOD WANSICOT AND WOOD STUDS: 1/2" PLYWOOD.
  - G.10 BETWEEN FRP PANELS AND METAL STUDS: 1/2" CEMENTITIOUS BOARD.
  - G.11 BETWEEN FREEZER/COOLER WALLS AND WOOD STUD WALLS: 1 FT TALL CEMENT BOARD BASE WITH 1/2" GYPSUM BOARD (LEVEL 1 FINISH) TO 6" ABOVE FINISH CEILING. EXTEND 40 MIL COMPOSITE GOLD WATERPROOF MEMBRANE FROM FLOOR AS INDICATED ON FINISH PLAN UP WALLS AS INDICATED ON FREEZER AND COOLER SCREEN DETAILS.
  - G.12 BEHIND WOOD BOARD FINISH AT CON WALL: 3/4" PLYWOOD.
  - G.13 BEHIND WOOD BOARD FINISH AT OTHER LOCATIONS: 1/2" PLYWOOD.
- INTERIOR BASE FINISH & SHEATHING NOTES**
- H.1 AT MATERIALS LABELED "INTERIOR SHEATHING" ON WALL TYPE DRAWINGS AND DETAILS, MATERIALS SHALL BE AS FOLLOWS UNLESS NOTED OTHERWISE. REFER TO FINISH PLAN AND INTERIOR ELEVATIONS FOR FINISH MATERIAL.
  - H.2 BETWEEN TILE BASE AT KITCHEN AND STUDS: 1/2" CEMENTITIOUS BACKER BOARD TO MINIMUM 1'-0" ABOVE SLAB.
  - H.3 BETWEEN TILE BASE AT KITCHEN AREAS AND STUD WALLS: 1/2" CEMENTITIOUS BACKER BOARD TO MINIMUM 6" ABOVE SLAB.
  - H.4 BETWEEN VINYL BASE AND WOOD STUD WALLS: 1/2" GYPSUM BOARD.

**Order Plans**

2/5/2016 12:27:26 PM