


1 RUNOUT ANCHOR DETAILS P3.1 SCHEMATIC

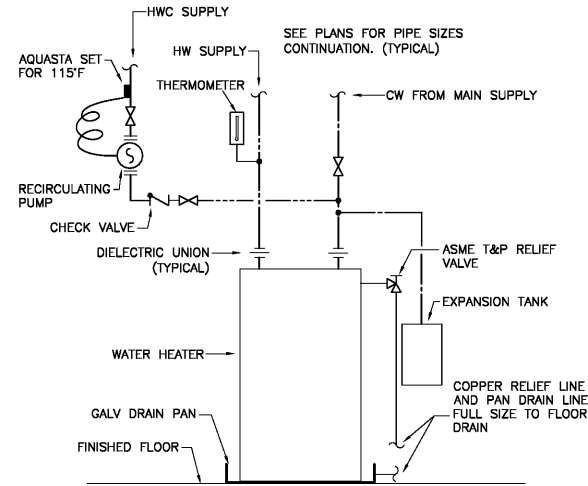

2 WATER HEATER PIPING DETAIL P3.1 NOT TO SCALE

GENERAL PLUMBING NOTES

THE LOCATIONS OF EXISTING UNDERGROUND UTILITIES ARE SHOWN IN AN APPROXIMATE WAY ONLY. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL EXISTING UTILITIES BEFORE COMMENCING WORK. HE SHALL BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES WHICH MIGHT BE OCCASIONED BY HIS FAILURE TO EXACTLY LOCATE AND PRESERVE ANY AND ALL UNDERGROUND UTILITIES.

PLUMBING FIXTURE SCHEDULE

Table with columns: SYMBOL, FIXTURE, WASTE CONN. BRANCH, VENT, COLD WATER, HOT WATER, RIM HGT., KOHLER MODEL NUMBER EXCEPT AS NOTED. Includes items like P-1 WATER CLOSET, P-2 WATER CLOSET (A.D.A. ADULT), P-3 URINAL (A.D.A. ADULT), etc.

PLUMBING FIXTURE SCHEDULE KEYNOTES

- 1 RIM HEIGHT FOR GUIDANCE ONLY. SEE ARCHITECTS DRAWINGS FOR EXACT MOUNTING HEIGHT. ROUGH WATER AND SANITARY CONNECTION AS REQUIRED. RIM HEIGHT INCLUDES SPECIFIED SEAT ON WATER CLOSETS.
2 PROVIDE "TRUEBRO LAV GUARD" PROTECTIVE PIPE COVERS ON WASTE AND SUPPLY PIPING.
3 PROVIDE DRAIN TRAP SEALS IN DRAINS.
4 PROVIDE 7" STRAINER ON 3" DRAINS AND 9" STRAINER ON 4" DRAINS. PROVIDE ROUND TOP FOR ALL FLOOR DRAINS.
5 INCLUDE AMTROL ST-5 EXPANSION TANK.
6 INCLUDE BATTERY OPERATED FAUCET WITH CHROME FINISH, 1.5 GPM AERATOR, BELOW DECK THERMOSTATIC MIXING VALVE OPTION AND NO TRIM PLATE.
7 RIM FLUSH WITH FINISHED FLOOR.

PLUMBING SPECIFICATIONS

CODES, PERMITS AND FEES: CONTRACTOR SHALL PAY FOR ALL PERMITS AND INSPECTION FEES REQUIRED FOR THIS PROJECT.
PLUMBING SHALL COMPLY WITH THE INTERNATIONAL PLUMBING CODE.
WASTE AND VENT PIPING: SCH. 40 PVC PIPE AND DRAINAGE PATTERN FITTINGS WITH SOLVENT WELD JOINTS.
WATER PIPING: TYPE "L" HARD COPPER WITH WROUGHT COPPER FITTINGS AND SOLDERED JOINTS.
HANGERS AND SUPPORTS: HANGERS SHALL BE SUPPORTED WITH ALL-THREAD ROD. HANGERS SHALL BE SECURED TO THE CONCRETE DECK ABOVE USING CONCRETE INSERTS.
LUBRICATED BY THE CIRCULATING FLUID. INCLUDE AQUALSTAT WITH METAL ENCLOSURE, STRAP-ON MOUNTING, VISIBLE POINT SCALE, EXTERNAL ADJUSTMENT SCREW AND 65F TO 200F OPERATING RANGE. WIRE AQUALSTAT IN SERIES WITH PUMP.
TRAP GUARDS, RECTANGULAR GURESEALS OR JONES STEPHENS GREEN DRAIN SEALS.
AND APPURTENANCES IN THEIR ENTIRETY. CAP EXISTING PIPING THAT REMAINS IN PLACE.
ABANDONED WORK: CUT AND REMOVE PIPE ABANDONED IN PLACE, 2 INCHES BEYOND THE FACE OF ADJACENT CONSTRUCTION. CAP PIPING AND PATCH SURFACE TO MATCH EXISTING FINISH.
REMOVE ALL HANGERS, SUPPORTS AND ANCHORS ASSOCIATED WITH MECHANICAL ITEMS BE REMOVED. PATCH SURFACES TO MATCH ADJACENT FINISHES.
EXERCISE CARE SO AS NOT TO CUT ANY EXISTING UTILITIES OR SERVICES. WHERE AN EXISTING UTILITY LINE OR SERVICE LINE IS CUT IT SHALL BE REPAIRED TO "LIKE-NEW" CONDITION.
INTERRUPTION OF SERVICE SHALL NOT BE MADE WITHOUT PRIOR WRITTEN PERMISSION OF THE OWNER.

PLUMBING LEGEND

Table with columns: SYMBOL, DESCRIPTION, SYMBOL, DESCRIPTION. Includes symbols for WASTE OR SANITARY SEWER, VENT, ECW, EHW, EHW, NE, PDI, ESS, EXIST. SOIL, WASTE, OR SANITARY SEWER, COLD WATER, HOT WATER, HOT WATER CIRCULATING, SHUTOFF VALVE, FLOOR DRAIN, WATER HAMMER ARRESTOR.



12A E. GRADY STREET P.O. BOX 1382 912-764-6288 STATESBORO GEORGIA 30458 www.dprarch.com


COPYRIGHT 2015 - ALL RIGHTS RESERVED PRINTED OR ELECTRONIC DRAWINGS AND DOCUMENTATION MAY NOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION FROM DPR ARCHITECTURE



JENKINS COUNTY COURTHOUSE RENOVATION PHASE 3 MILLEN GEORGIA

SCHEDULE OF REVISIONS table with columns #, DATE. Includes PROJECT NUMBER: 084-C, PROJECT DATE: 11-01-17, DRAWN BY: RWW, APPROVED BY: JCP.

FINAL P3.1



PLOT DATE: 10/31/17 FILENAME: 17054P1 BASESHT: 14008BDR.BSC PLOT SCALE: 1 = 96 RWW

COPYRIGHT © 2017 PRULETT, FORD & ASSOCIATES, INC. AUGUSTA, GA 30901 (706) 722-3959