



ASPHALT/CONCRETE TRANSITION

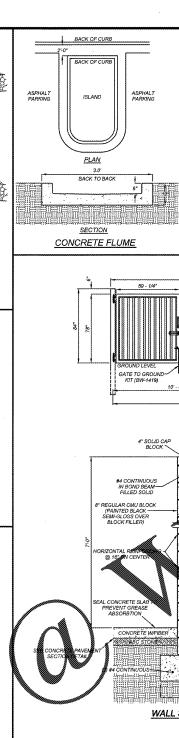

SECTION

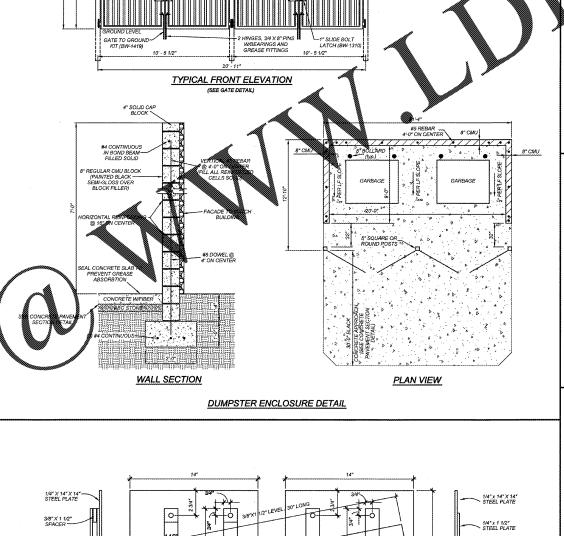



GATE LATCH DETAILS

4 1/2"


SECTION


NOTE: ALL TRAFFIC ARROWS TO BE WHITE IN COLOR, MINIMUM FLOW RATE OF 100 SF PER GALLON (PAINT FEDERAL SPECIFICATION: TT-P-1952D) TRAFFIC ARROWS

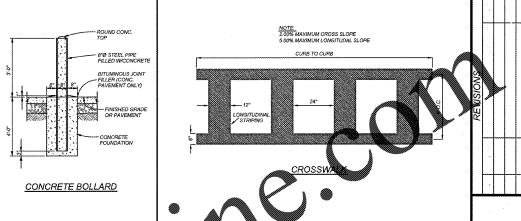



TYPICAL FLUSH ADA CONCRETE SIDEWALK WITH DETECTABLE WARNING SURFACE ADJACENT TO HANDICAP PARKING







COMMERCIAL SITE DESIGN

Know what's below.

Call before you dig.

nc811.org or 1-800-632-4949

24 HOUR CONTACT DAVID SHOTWELL CONSTRUCTION MANAGER TELEPHONE: (336) 807-0101



OUT-1715 OUT 1715-DTL1 DDH N.T.S. 05-19-17 C-5