

Owner:
Georgetown County
716 Prince Street
Georgetown, SC 29442



SGA ARCHITECTURE
ARCHITECTURAL & CONSTRUCTION
Pawleys Island / Charleston
245 Business Center Lane / PO Box 1859
Pawleys Island, SC 29585
Phone: 843.237.2421 / Fax: 843.237.1992
www.sgaarchitecture.com

Civil Consultant:
ETS
ENGINEERING AND TECHNICAL SERVICES, INC.
38 Enterprise Lane
P.O. Box 500
Georgetown, SC 29442
Phone: 843.237-3002 Fax: 843.237-2889

MEP Consultant:
Charleston Engineering
103 B. Wagon Wheel Dr.
Charleston, SC 29412
843-762-4342
Mechanical, Plumbing & Electrical

Structural Consultant:
Weatherly
144 West Street, Suite 100, Charleston, SC 29401
Copyright 2018. All rights reserved.
PRINTED OR ELECTRONIC DRAWINGS AND DOCUMENTATION MAY NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION FROM WEATHERLY ENGINEERING.

Irrigation Consultant:



MEMBERS OF THE AMERICAN INSTITUTE OF ARCHITECTS
COPYRIGHT 2018. ALL RIGHTS RESERVED.
PRINTED OR ELECTRONIC DRAWINGS AND DOCUMENTATION MAY NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION FROM SGA ARCHITECTURE.


Job Number: 15017 (WE 18-126)
Date: 03/14/18
Drawn by: CMW
Checked by: DWS

Notes:
BIDDING DOCUMENTS

Revisions:

Foundation & Ground
Level Slab Plan

S200

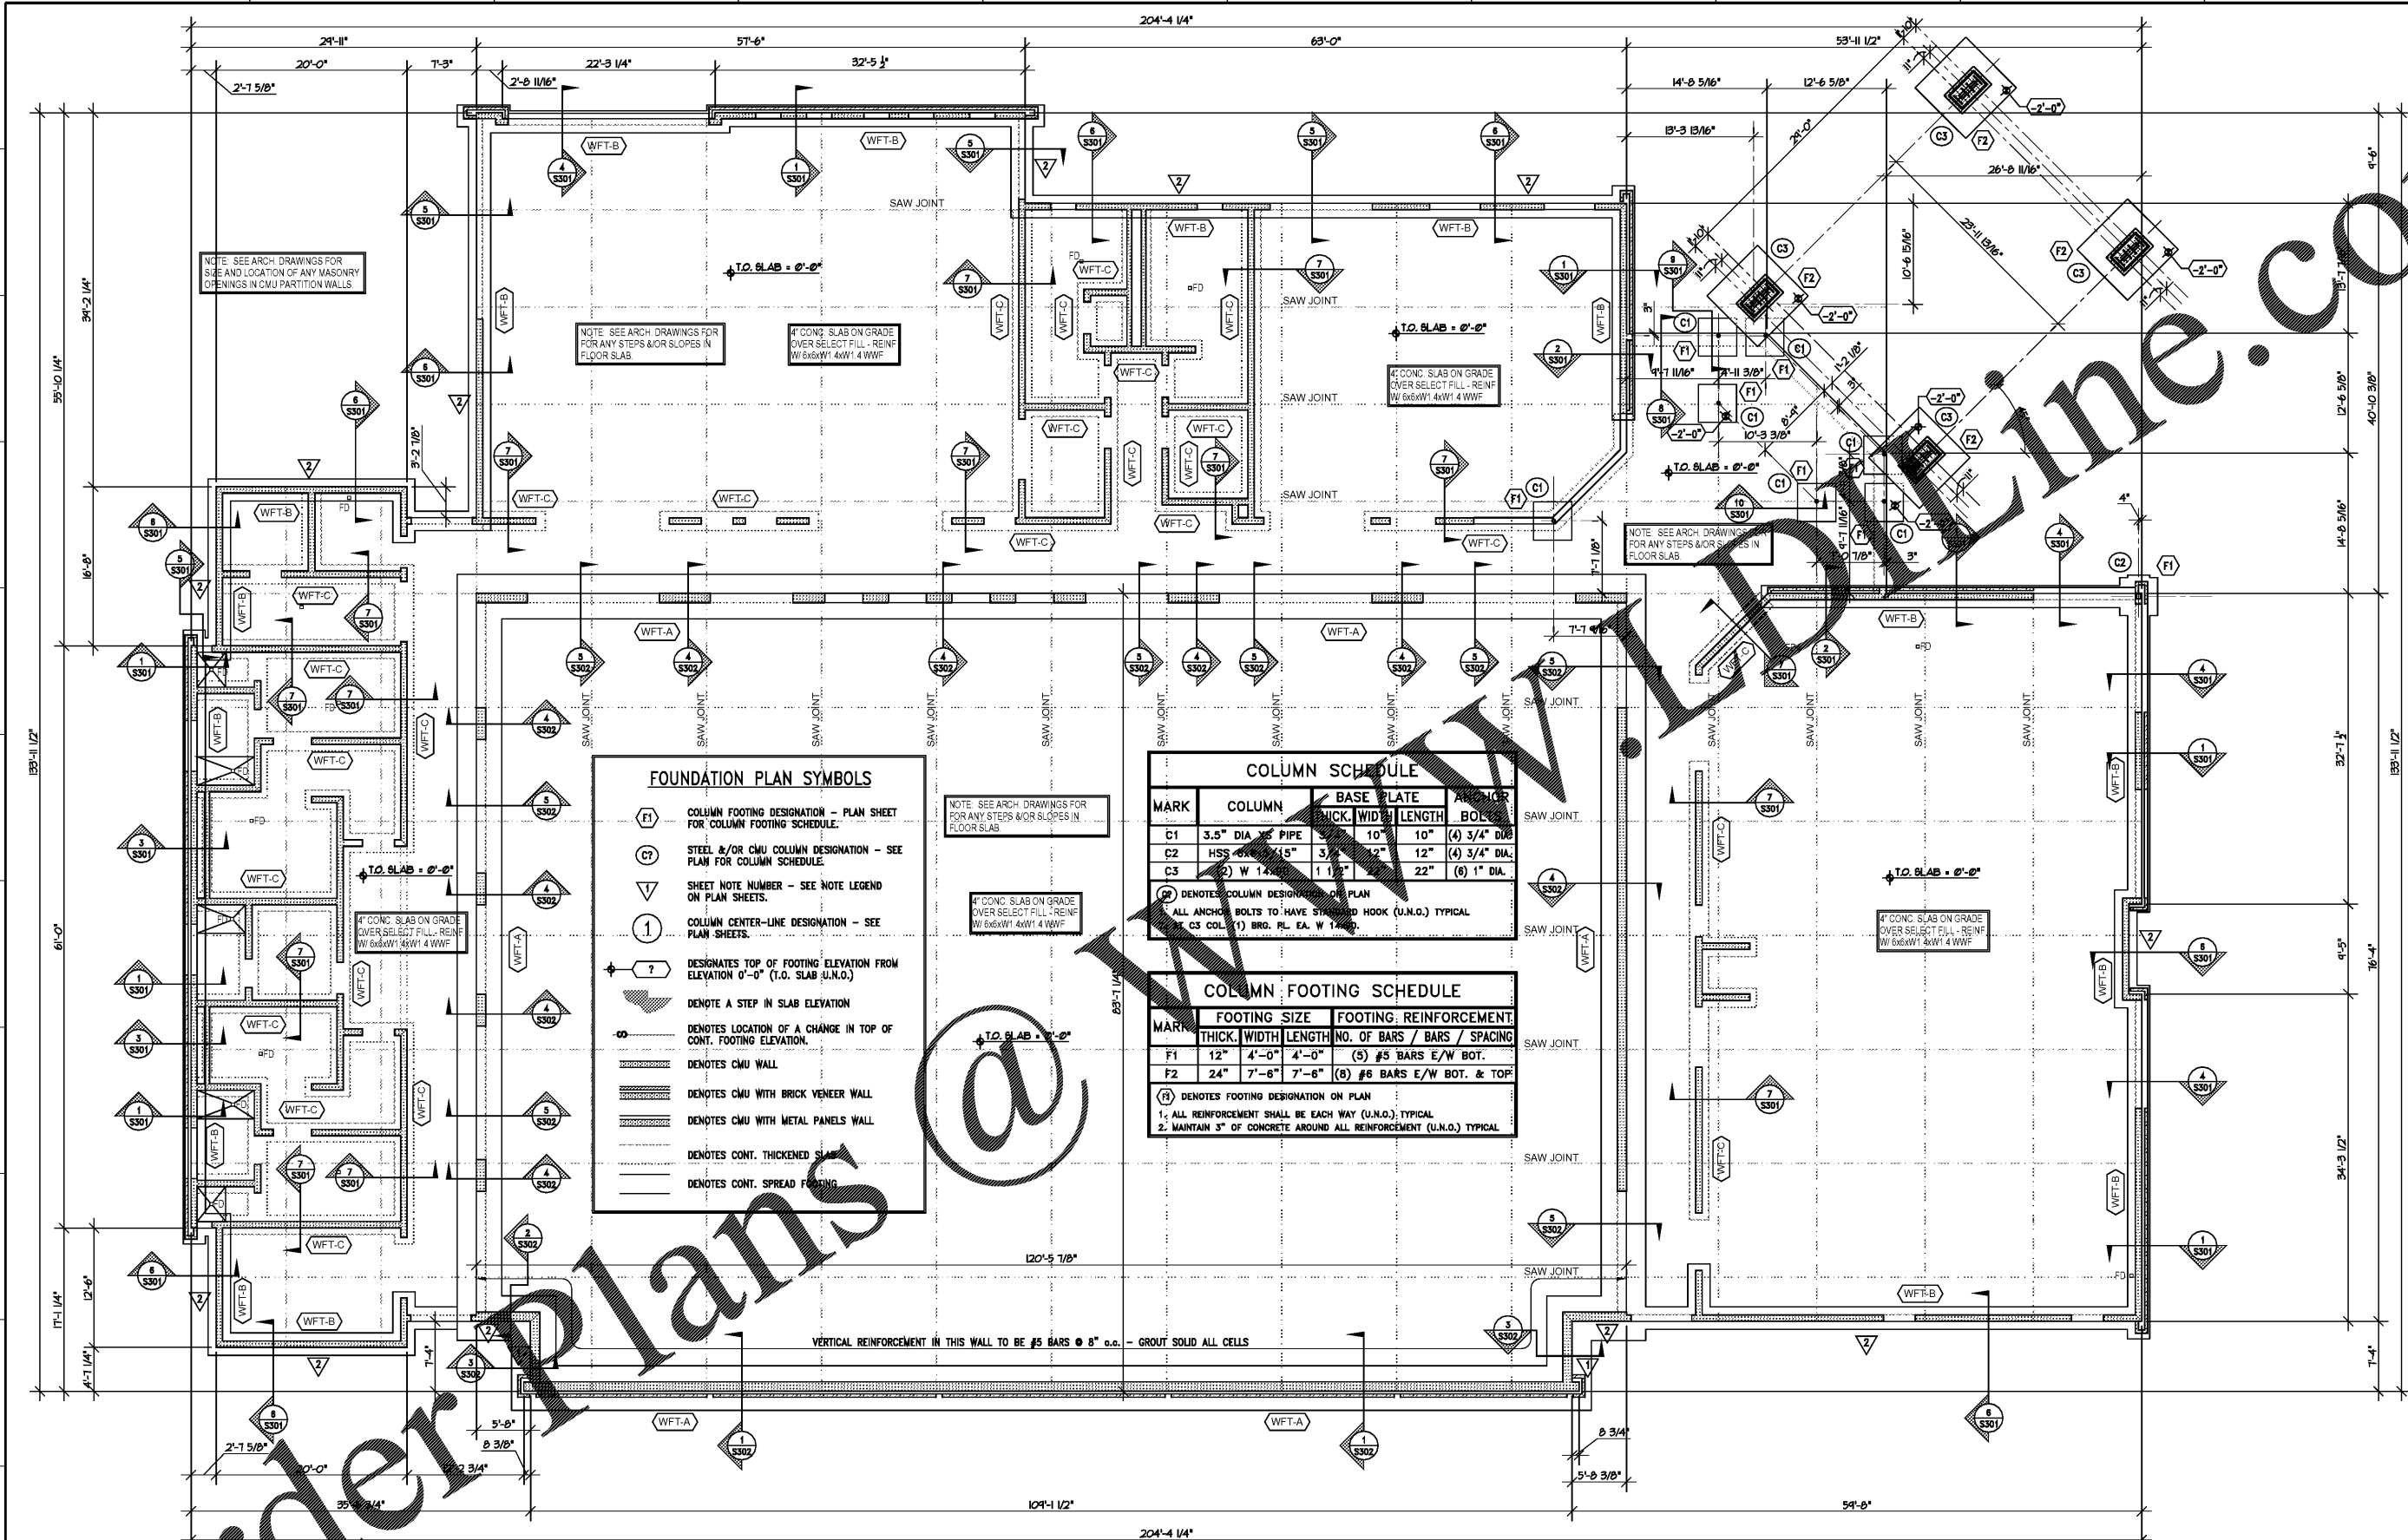

FOUNDATION PLAN SYMBOLS

- (F1) COLUMN FOOTING DESIGNATION - PLAN SHEET FOR COLUMN FOOTING SCHEDULE.
- (C1) STEEL &/OR CMU COLUMN DESIGNATION - SEE PLAN FOR COLUMN SCHEDULE.
- ▽ SHEET NOTE NUMBER - SEE NOTE LEGEND ON PLAN SHEETS.
- ① COLUMN CENTER-LINE DESIGNATION - SEE PLAN SHEETS.
- ↑ ? DESIGNATES TOP OF FOOTING ELEVATION FROM ELEVATION 0'-0" (T.O. SLAB U.N.O.)
- ▭ DENOTE A STEP IN SLAB ELEVATION
- DENOTES LOCATION OF A CHANGE IN TOP OF CONT. FOOTING ELEVATION.
- ▨ DENOTES CMU WALL
- ▨ DENOTES CMU WITH BRICK VENEER WALL
- ▨ DENOTES CMU WITH METAL PANELS WALL
- ▨ DENOTES CONT. THICKENED SLAB
- ▨ DENOTES CONT. SPREAD FOOTING

COLUMN SCHEDULE

MARK	COLUMN	BASE PLATE THICK.	WID.	LENGTH	ANCHOR BOLTS
C1	3.5" DIA. PIPE	10"	10"	10"	(4) 3/4" DIA.
C2	HSS 4" X 4" X 1/4"	3"	12"	12"	(4) 3/4" DIA.
C3	2" W 14	1 1/2"	22"	22"	(6) 1" DIA.

(B) DENOTES COLUMN DESIGNATION ON PLAN
ALL ANCHOR BOLTS TO HAVE STRAIGHT HOOK (U.N.O.) TYPICAL
CS COL. (1) BRO. PL. EA. W 14

COLUMN FOOTING SCHEDULE

MARK	FOOTING SIZE THICK. WIDTH LENGTH	FOOTING REINFORCEMENT NO. OF BARS / BARS / SPACING
F1	12" 4'-0" 4'-0"	(5) #5 BARS E/W BOT.
F2	24" 7'-8" 7'-8"	(8) #6 BARS E/W BOT. & TOP

(B) DENOTES FOOTING DESIGNATION ON PLAN
1. ALL REINFORCEMENT SHALL BE EACH WAY (U.N.O.) TYPICAL.
2. MAINTAIN 3" OF CONCRETE AROUND ALL REINFORCEMENT (U.N.O.) TYPICAL.

NOTE: SEE ARCH. DRAWINGS FOR SIZE AND LOCATION OF ANY MASONRY OPENINGS IN CMU PARTITION WALLS.

NOTE: SEE ARCH. DRAWINGS FOR ANY STEPS &/OR SLOPES IN FLOOR SLAB.

4" CONC. SLAB ON GRADE OVER SELECT FILL - REINF. W/ 6x6xW1.4W1.4 WWF.

4" CONC. SLAB ON GRADE OVER SELECT FILL - REINF. W/ 6x6xW1.4W1.4 WWF.

NOTE: SEE ARCH. DRAWINGS FOR ANY STEPS &/OR SLOPES IN FLOOR SLAB.

NOTE: SEE ARCH. DRAWINGS FOR ANY STEPS &/OR SLOPES IN FLOOR SLAB.

4" CONC. SLAB ON GRADE OVER SELECT FILL - REINF. W/ 6x6xW1.4W1.4 WWF.

4" CONC. SLAB ON GRADE OVER SELECT FILL - REINF. W/ 6x6xW1.4W1.4 WWF.

4" CONC. SLAB ON GRADE OVER SELECT FILL - REINF. W/ 6x6xW1.4W1.4 WWF.

4" CONC. SLAB ON GRADE OVER SELECT FILL - REINF. W/ 6x6xW1.4W1.4 WWF.

4" CONC. SLAB ON GRADE OVER SELECT FILL - REINF. W/ 6x6xW1.4W1.4 WWF.

4" CONC. SLAB ON GRADE OVER SELECT FILL - REINF. W/ 6x6xW1.4W1.4 WWF.

4" CONC. SLAB ON GRADE OVER SELECT FILL - REINF. W/ 6x6xW1.4W1.4 WWF.

4" CONC. SLAB ON GRADE OVER SELECT FILL - REINF. W/ 6x6xW1.4W1.4 WWF.

4" CONC. SLAB ON GRADE OVER SELECT FILL - REINF. W/ 6x6xW1.4W1.4 WWF.

4" CONC. SLAB ON GRADE OVER SELECT FILL - REINF. W/ 6x6xW1.4W1.4 WWF.

SHEET NOTES:

- CONCRETE SLAB ON GRADE TO BE 4" THICK (U.N.O.) REINFORCED W/ 6x6xW1.4W1.4 WWF.
- SEE ARCH. DWGS FOR LOCATIONS OF ALL NON-LOAD BEARING 8" CMU PARTITION WALLS BEARING ON THICKENED SLABS - CENTER OF WALL = CENTER OF THICKENED SLAB - UNO.
- SEE ARCH. DWGS FOR LOCATIONS & SIZE OF ALL MASONRY OPENINGS IN BOTH LOAD & NON-LOAD BEARING CMU WALLS.
- UNLESS NOTED OTHERWISE TOP OF ALL WALL & COLUMN SPREAD FOOTINGS SHALL BE -2'-0"
- COORDINATE FOUNDATIONS W/ PLUMBING & NOTIFY WEATHERLY ENGINEERING OF ANY CONFLICTS.

- (WFT-A) 1'-8" THICK x 4'-8" WIDE CONT. SPREAD FOOTING - REINFORCE WITH (5) #6 BARS CONT. - LAP BARS 24" @ SPLICE - #4 SHORT BARS @ 24" o.c. CENTER OF SPREAD FOOTING = CENTER OF CMU WALL - UNO.
- (WFT-B) 12" THICK x 2'-4" WIDE CONT. SPREAD FOOTING - REINFORCE WITH (2) #6 BARS CONT. - LAP BARS 24" @ SPLICE - CENTER OF SPREAD FOOTING = CENTER OF CMU WALL - UNO.
- (WFT-C) 12" THICK x 24" WIDE THICKENED SLAB - REINFORCE WITH (2) #6 BARS CONT. - LAP BARS 24" @ SPLICE - CENTER OF THICKENED SLAB = CENTER OF CMU WALL.
- (WFT-D) 12" THICK x 36" WIDE THICKENED SLAB - REINFORCE WITH (3) #6 BARS CONT. - LAP BARS 24" @ SPLICE - CENTER OF THICKENED SLAB = CENTER OF CMU WALL.

- ▽ ZP x3"x16 GA. (300ZP250-54) @ 4'-0" o.c. - ATTACHED HORIZONTALLY TO EXTERIOR FACE OF CMU WALL W/ (1) HILTI X-U 0.157" DIA. PAF @ 8" o.c. W/ 1" MIN. EMBED. - SEE ARCH. DWGS. FOR JAMB, HEAD & SILL DETAILS @ OPENINGS.
- ▽ ZP x3"x16 GA. (300ZP250-54) @ 4'-0" o.c. - ATTACHED VERTICALLY TO EXTERIOR FACE OF CMU WALL W/ (1) HILTI X-U 0.157" DIA. PAF @ 8" o.c. W/ 1" MIN. EMBED. - SEE ARCH. DWGS. FOR JAMB, HEAD & SILL DETAILS @ OPENINGS.

Order Plans
Foundation Plan
SCALE: 1/8" = 1'-0"