




TYP. SITE BARRIER DTL.  
SCALE: 1" = 1'-0"

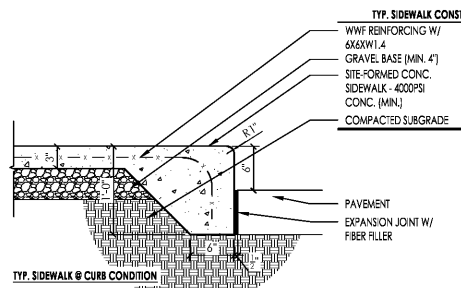


TYP. DTL. @ SIDEWALK  
SCALE: 1" = 1'-0"

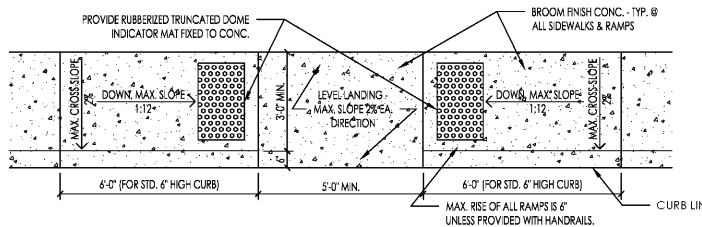


RAMP PLAN DTL.  
SCALE: 3/8" = 1'-0"

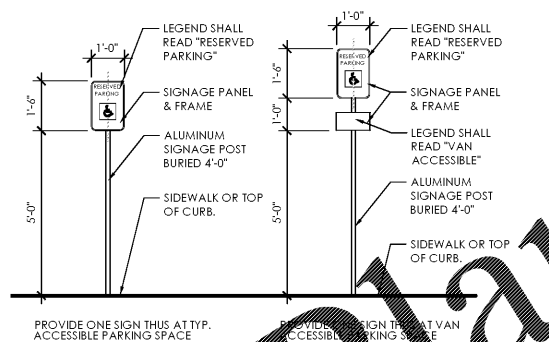


HANDICAP PARKING SIGNS  
SCALE: 3/8" = 1'-0"

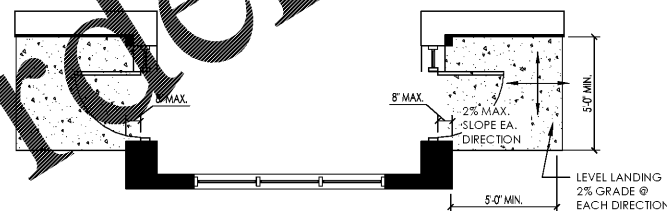

02 DOOR LANDING DETAIL (AT ALL DOORS)  
A0.2 SCALE: 1/4" = 1'-0"

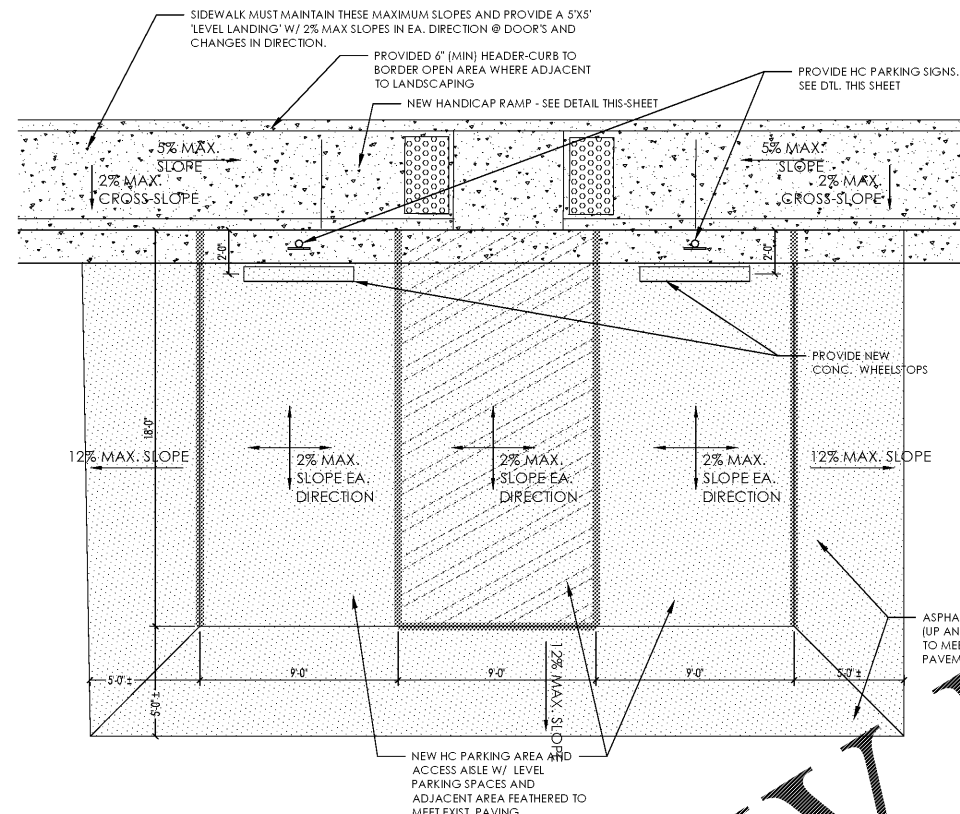

01 TYP. HC PARKING DETAIL  
A0.2 SCALE: 1/16" = 1'-0"

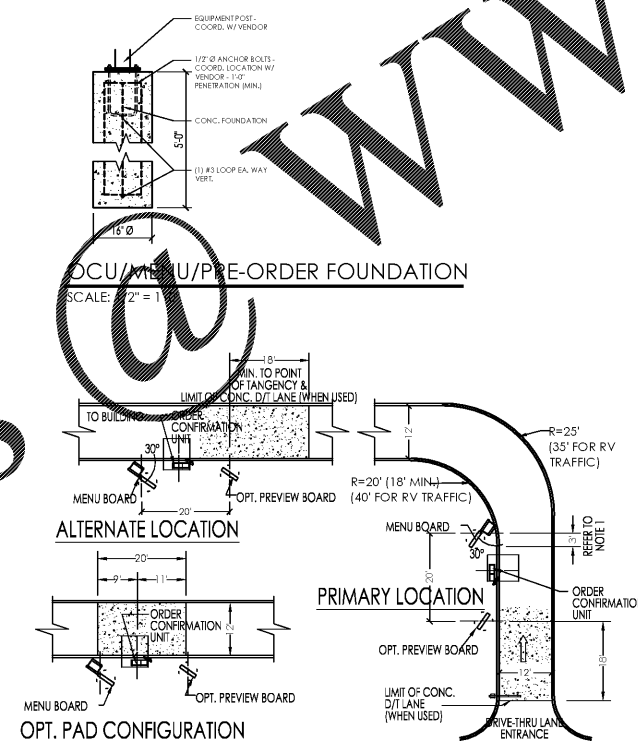

- DRAWING REFLECTS MENU BOARD IN "PREFERRED" LAYOUT. FOR "MINIMUM" LAYOUT AND ADDITIONAL INFORMATION, REFER TO SITE DETAIL CA. 3" DISTANCE IS THE MAXIMUM DISTANCE FROM THE POINT OF TANGENCY TO THE CENTER OF THE MENU BOARD SUPPORT POST FOR THE "PREFERRED" LAYOUT (CLOSEST POSITION TO THE CURVE ALLOWED). FOR THE "MINIMUM" LAYOUT, THE CENTERLINE OF THE MENU BOARD SUPPORT POST MAY NOT BE CLOSER TO THE CURVE THAN THE POINT OF TANGENCY.
- ORDER CONFIRMATION UNIT SHOULD BE 100' (MIN.) FROM FOOD DELIVERY WINDOW.
- IN NO CASE SHOULD THE ORDER STATION BE PLACED ON THE CURVE.
- CONCRETE DRIVE-THRU LANE IS OPTIONAL. WHEN USED, IT IS TO BE CONTINUOUS AS INDICATED ON THIS DRAWING TO 9' EAST CENTER OF CUSTOMER COURTESY POST AS INDICATED ON DETAIL TEMPLATE VII OF VII. CONCRETE TO BE 3,000 P.S.I., 6" THICK, WITH 6X6-W2.9XW2.9 W.W.M. WITH PREMOULDED BITUMINOUS NON-EXTRUDING EXPANSION JOINTS AT 10'-0" O.C. OPTIONAL TO POUR A 4" BASE SLAB OF 3000 P.S.I. CONCRETE, IMMEDIATELY FOLLOWED BY A 2" SURFACE SLAB OF 3000 P.S.I. CONCRETE DYED BLACK USING ADMIXTURE [CHROMIX C-24 "CHARCOAL" BY SCHOFIELD CO., OR EQUAL]. INSURE THE 2" WEARING SURFACE BONDS TO THE BASE SLAB.
- IN LIEU OF FULL CONCRETE D/T LANE, 12' X 20' (MIN.) CONCRETE PAD MAY BE USED. (ALSO OPTIONAL)

DRIVE THROUGH CONFIGURATION  
NTS

PREVIEW AND MENUBOARD DECORATIVE ELEMENTS GUIDELINES:

REQUIRED AS PART OF THE 20/20 IMAGE FOR NEW CONSTRUCTION AND REMODELS. THE DECORATIVE LANDSCAPE WALL, OR SIGNAGE BASE WALL, SHALL BE USED AT THE DRIVE-THRU MENU BOARD AND PREVIEW BOARD.


- THE LANDSCAPE WALL SHALL BE CONSTRUCTED OF LANDSCAPE PAVESTONE, THE TYPICAL HEIGHT SHALL BE 8" - 12" ABOVE GRADE.
- THE SIGNAGE BASE WALL SHALL MATCH THE BUILDING WAINSCOT IN COLOR AND MATERIAL. IT SHALL EXTEND TO THE SIGNAGE HORIZONTAL TUBE SUPPORT.



DECORATIVE LANDSCAPE WALL INSTALLATION:  
REMOVE 6" TO 8" OF SOIL MATERIAL. COVER EXCAVATED AREA WITH LANDSCAPE FABRIC TO PROTECT BASE FROM SOIL. LEVEL EXCAVATED AREA WITH 3/4" GRAVEL, RAKE TO APPROXIMATE LEVEL, AND COMPACT PROPERLY. LAY OUT THE WALL WITH A STRING LINE, AND LAY THE PAVESTONE ALONG THE LINE. BURY THE FIRST LAYER 3/4 OF THE PAVESTONE HEIGHT, AND INSTALL THE NEXT COURSE USING LANDSCAPE BLOCK ADHESIVE BETWEEN EACH COURSE. BACKFILL WITH BLACK DIRT AND PLANT PER LANDSCAPE PLANS.


SIGNAGE BASE WALL INSTALLATION:  
SIGNAGE BASE WALL SHALL BE CONSTRUCTED WITH FOOTINGS AND STRUCTURE DEPENDANT ON SOILS CONDITIONS.

YOUR INSTALLATION REQUIREMENTS WILL VARY ACCORDING TO YOUR SOIL OR GEOGRAPHICAL LOCATION. COMPLY WITH LOCAL REQUIREMENTS. CARE SHOULD BE TAKEN TO ENSURE ALL CONTROLS AND ACCESS PANELS ARE FULLY ACCESSIBLE.

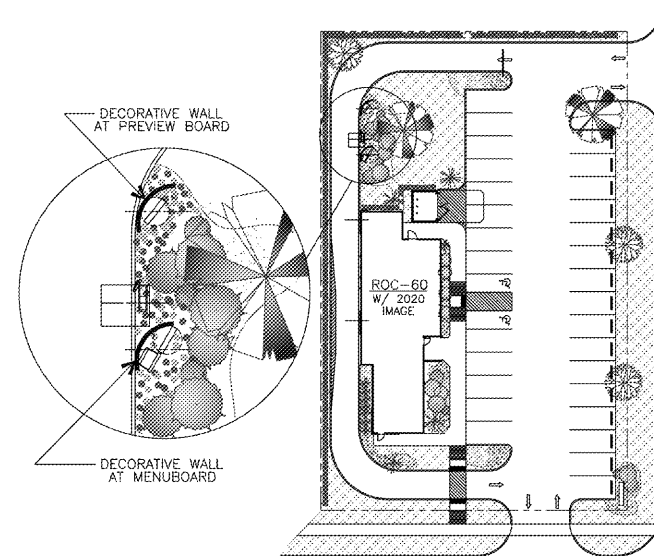

NOTE:

- SITE DESIGN SHOWN IS FOR REFERENCE ONLY AND IS NOT INTENDED TO PRESENT A SPECIFIC DESIGN SOLUTION. GEOGRAPHICAL AREA WILL DICTATE SPECIES OF PLANT MATERIAL.
- MENUBOARD AND PREVIEW BOARD SHALL BE ACCENTED WITH A DECORATIVE LANDSCAPE WALL. WALL SHALL BE SIMILAR IN SIZE AND SHAPE TO DRAWING ABOVE.
- THE USE OF STONE AND NATIVE PLANTS IS HIGHLY ENCOURAGED.

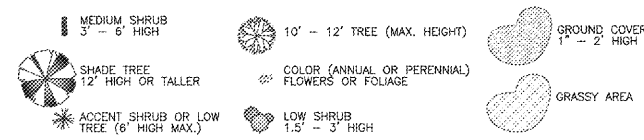

TYP. LANDSCAPING  
SCALE: 1/8" = 1'-0"


NO.	DATE	BY	CHKD.	DESCRIPTION
01	05/11/18	JM	JM	REVISED SET
02				
03				
04				
05				
06				
07				

**BURGER KING**

PREMIER HOLDINGS OF GEORGIA, LLC  
3838 Stewart Road, Unit A  
Doraville, GA 30040

2124 North Avenue  
Bldg 300  
Atlanta, GA 30309  
Phone: (404) 322-1751  
Fax: (404) 322-1778  
email: info@jhm.com  
www.jhm.com

**James M. Huxstein architect AIA**  
architecture • planning • interior design



PROJECT #1702115  
IMAGE 20/20 - JULY 2012 STANDARDS

**BURGER KING**  
998 SUNSET BLVD.  
JESUP, GA 31545

SITE DETAILS