



1 TYPICAL CLASSROOM MULTIMEDIA DETAIL [AVC-1] [AVC-2] SCALE: NONE

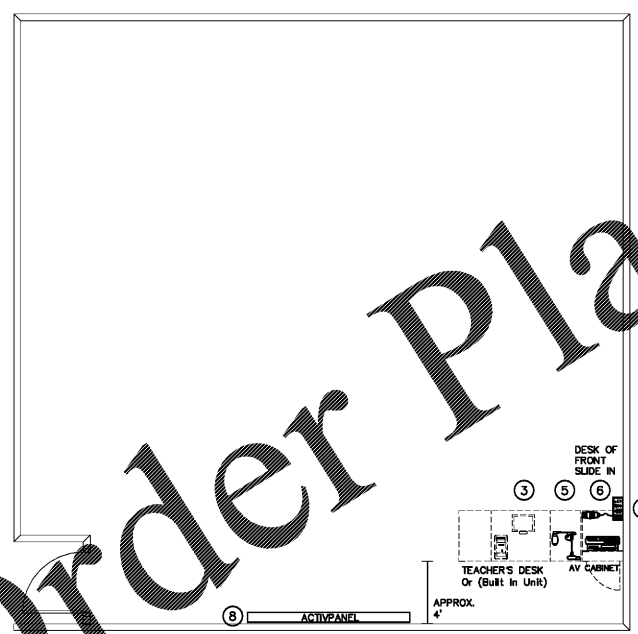

2 TYP. CLASSROOM A/V EQUIPMENT PLACEMENT [AVC-1] SCALE: NONE

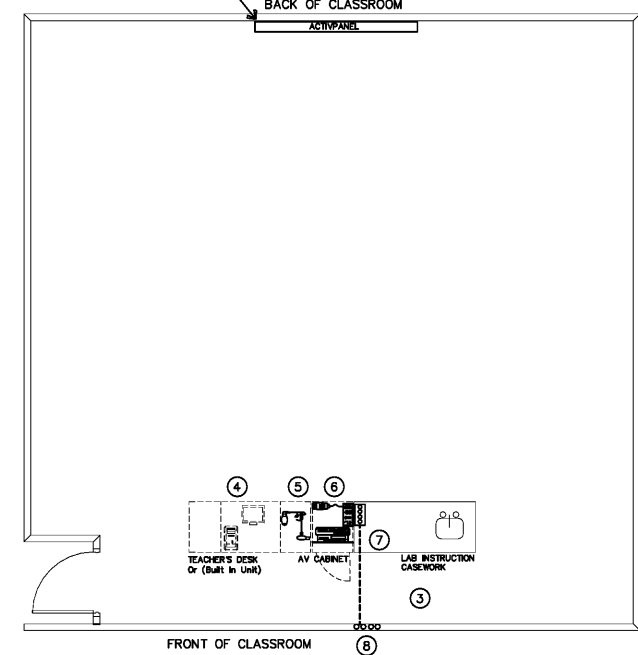

2 TYP. LAB/SCIENCE CLASSROOM A/V EQUIPMENT PLACEMENT [AVC-2] SCALE: NONE

- NOTES:**
- AV CONTRACTOR TO COORDINATE PLACEMENT OF SPEAKERS WITH MCSO ET TECH. INSTRUCTIONAL TECH. COORDINATOR AND PER MANUFACTURER SPECIFICATIONS.
 - AV CONTRACTOR TO NEATLY COIL 5' EXPANSION LOOP ABOVE CEILING AT POTENTIAL PROJECTOR LOCATION.
 - AV CONTRACTOR TO PROVIDE AND INSTALL J-HOOK w/BATWING CLIP FASTENED TO CEILING GRID SUPPORT RODS NOT LESS THAN 2" ABOVE CEILING GRID ELEVATION USING PATHWAY SHOWN. ALL AV CABLING SHALL BE SUPPORTED USING SPECIFIED METHOD ABOVE AND NOT EXCEEDING 5' INTERVALS BETWEEN SUPPORTS.
 - AV CONTRACTOR SUPPLIED, ASSEMBLED AND INSTALLED PODIUM SAFCO P# 8919MH (MAHOGANY). COORDINATE PLACEMENT OF DEVICES ON PODIUM WITH BENJAMIN SCHOOL I.T. DEPARTMENT INSTRUCTIONAL TECHNICAL COORDINATOR. COORDINATE PLACEMENT AND QUANTITY UP TO (7) AV CONTRACTOR SUPPLIED AND INSTALLED 2" FURNITURE GROMMETS REQUIRED BASED ON DEVICE PLACEMENT AND NEATLY SUPPORTED PATCH CABLE ROUTING.
 - AV CONTRACTOR TO PROVIDE AND SECURELY INSTALL 20' 14 AWG EXTENSION CORD TO 8 PORT SURGE PROTECTOR BELKIN P# F9M800-08 IN ACCESSIBLE LOCATION IN LOWER SECTION PODIUM. PROVIDE ET TECH. COORDINATOR WITH WARRANTY RELATED DOCUMENTATION IE PRODUCT REGISTRATION #, PRODUCT SERIAL#, CORRESPONDING CLASSROOM/LOCATION. INCLUDE ABOVE INFORMATION IN CLOSE OUT DOCUMENTS.
 - AV CONTRACTOR TO MANAGE ALL EXCESS AV PATCH AND POWER CABLES WRAPPED IN SPLIT LOOM IN LOWER SECTION OF PODIUM.
 - AV CONTRACTOR TO NEATLY COIL 5' EXPANSION LOOP ABOVE CEILING AT 4 GANG CONDUIT STUBS. DO NOT OBSTRUCT ENTRANCES TO CONDUIT.
 - PANEL PROVIDED AND INSTALLED BY ELECTRICAL CONTRACTOR. SCREEN SIZE MAY BE DIFFERENT FROM SHOWN, VERIFY SCREEN SIZE AND INSTALL PROJECTOR AT MANUFACTURER'S SUGGESTED DISTANCE WITH APPLICABLE ASPECT RATIO.

NOTE:
CONTRACTOR SHALL PROVIDE FOR AN ACTIVPANEL AS INDICATED UNDER THE BASE BID AND A SHORT-THROW PROJECTOR UNDER AN ALTERNATE BID.

- NOTES:**
- AV CONTRACTOR TO COORDINATE PLACEMENT OF SPEAKERS WITH BENJAMIN SCHOOL I.T. DEPARTMENT INSTRUCTIONAL TECHNICAL COORDINATOR PER MANUFACTURER'S SPECIFICATIONS.
 - AV CONTRACTOR TO NEATLY COIL 5' EXPANSION LOOP ABOVE CEILING AT POTENTIAL PROJECTOR LOCATION.
 - AV CONTRACTOR TO PROVIDE AND INSTALL J-HOOK w/BATWING CLIP FASTENED TO CEILING GRID SUPPORT RODS NOT LESS THAN 2" ABOVE CEILING GRID ELEVATION USING PATHWAY SHOWN. ALL AV CABLING SHALL BE SUPPORTED USING SPECIFIED METHOD ABOVE AND NOT EXCEEDING 5' INTERVALS BETWEEN SUPPORTS.
 - AV CONTRACTOR TO COORDINATE PLACEMENT OF DEVICES AT TEACHERS DESK WITH GENERAL CONTRACTOR AND BENJAMIN SCHOOL I.T. DEPART. INSTRUCTIONAL TECHNICAL COORDINATOR. COORDINATE PLACEMENT AND QUANTITY OF 2" FURNITURE GROMMETS REQUIRED BASED ON DEVICE PLACEMENT AND NEATLY SUPPORTED PATCH CABLE ROUTING.
 - AV CONTRACTOR TO PROVIDE AND SECURELY INSTALL BELKIN 8 PORT SURGE PROTECTOR P# F9M800-08 IN ACCESSIBLE LOCATION IN UPPER SECTION AV CABINET. PROVIDE ET TECHNICAL COORDINATOR WITH WARRANTY RELATED DOCUMENTATION IE PRODUCT REGISTRATION #, PRODUCT SERIAL #, CORRESPONDING CLASSROOM/LOCATION. INCLUDE ABOVE INFORMATION IN CLOSE OUT DOCUMENTS.
 - AV CONTRACTOR TO MANAGE ALL EXCESS AV PATCH AND POWER CABLES IN LOWER SECTION OF AV CABINET.
 - ELECTRICAL CONTRACTOR INSTALLED CONDUIT BELOW FLOOR STUBBED INTO 4-GANG BOX WITHIN LAB INSTRUCTION CASEWORK.
 - ELECTRICAL CONTRACTOR INSTALLED CONDUITS STUBS INTO ACCESSIBLE CEILING.

Contract No: 16117.00
Job No: 117030
Date: 10-23-17
Drawn: WLM

Revisions		
No.	Date	Note