



01 SIDEWALK SLOPE DETAIL
A0.2 SCALE: 3/8" = 1'-0"


NOTE: GENERIC DETAIL; CONFIGURATION MAY VARY BUT SLOPES MUST REMAIN CONSISTENT

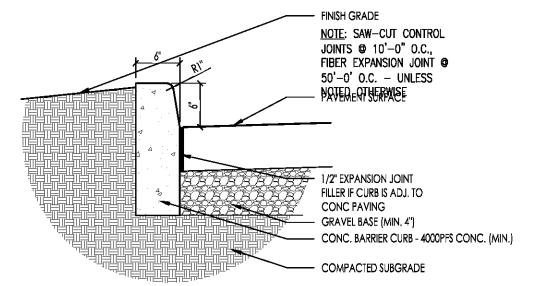


08 TYP. SITE BARRIER DTL.
A0.2 SCALE: 1" = 1'-0"

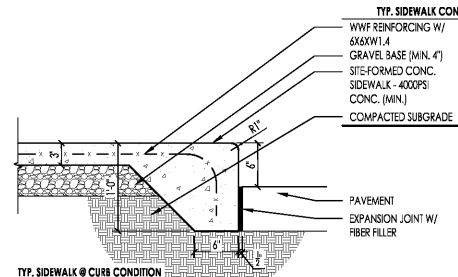

07 TYP. DTL. @ SIDEWALK
A0.2 SCALE: 1" = 1'-0"

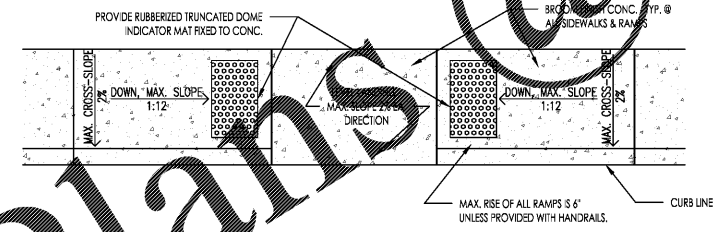

RAMP PLAN DTL.
A0.2 SCALE: 3/8" = 1'-0"

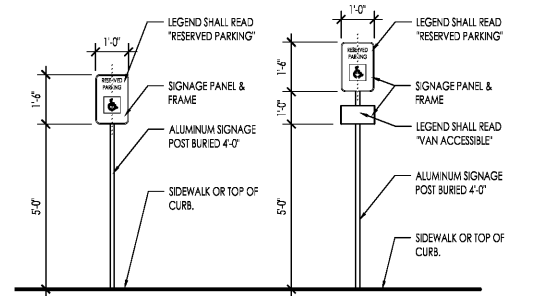

05 HANDICAP PARKING SIGNS
A0.2 SCALE: 3/8" = 1'-0"

TYP. SIDEWALK CONST.
W/WF REINFORCING W/ 5/8X1/4
GRAVEL BASE (MIN. 4")
SITE-FORMED CONC. SIDEWALK - 400PSI CONC. (MIN.)
COMPACTED SUBGRADE

TYP. SIDEWALK @ CURB CONDITION
PAVEMENT
EXPANSION JOINT W/ FIBER FILLER

LEGEND SHALL READ "RESERVED PARKING"
SIGNAGE PANEL & FRAME
ALUMINUM SIGNAGE POST BURIED 4'-0"
SIDEWALK OR TOP OF CURB


LEGEND SHALL READ "RESERVED PARKING"
SIGNAGE PANEL & FRAME
LEGEND SHALL READ "VAN ACCESSIBLE"
ALUMINUM SIGNAGE POST BURIED 4'-0"
SIDEWALK OR TOP OF CURB

FINISH GRADE
NOTE: SAW-CUT CONTROL JOINTS @ 10'-0" O.C., FIBER EXPANSION JOINT @ 50'-0" O.C. - UNLESS NOTED OTHERWISE
1/2" EXPANSION JOINT FILLER IF CURB IS ADJ. TO CONC. PAVING
CONC. BARRIER CURB - 400PSI CONC. (MIN.)
COMPACTED SUBGRADE


PROVIDE RUBBERIZED TRUNCATED DOME INDICATOR MAT FIXED TO CONC.
MIN. TO POINT OF TANGENCY & MAX. SLOPE 1:12
MAX. RISE OF ALL RAMPS 5' UNLESS PROVIDED WITH HANDRAILS.
CURB LINE

PROVIDE ONE SIGN THUS AT TYP. ACCESSIBLE PARKING SPACE
PROVIDE ONE SIGN THUS AT VAN ACCESSIBLE PARKING SPACE

PROVIDE ONE SIGN THUS AT TYP. ACCESSIBLE PARKING SPACE
PROVIDE ONE SIGN THUS AT VAN ACCESSIBLE PARKING SPACE

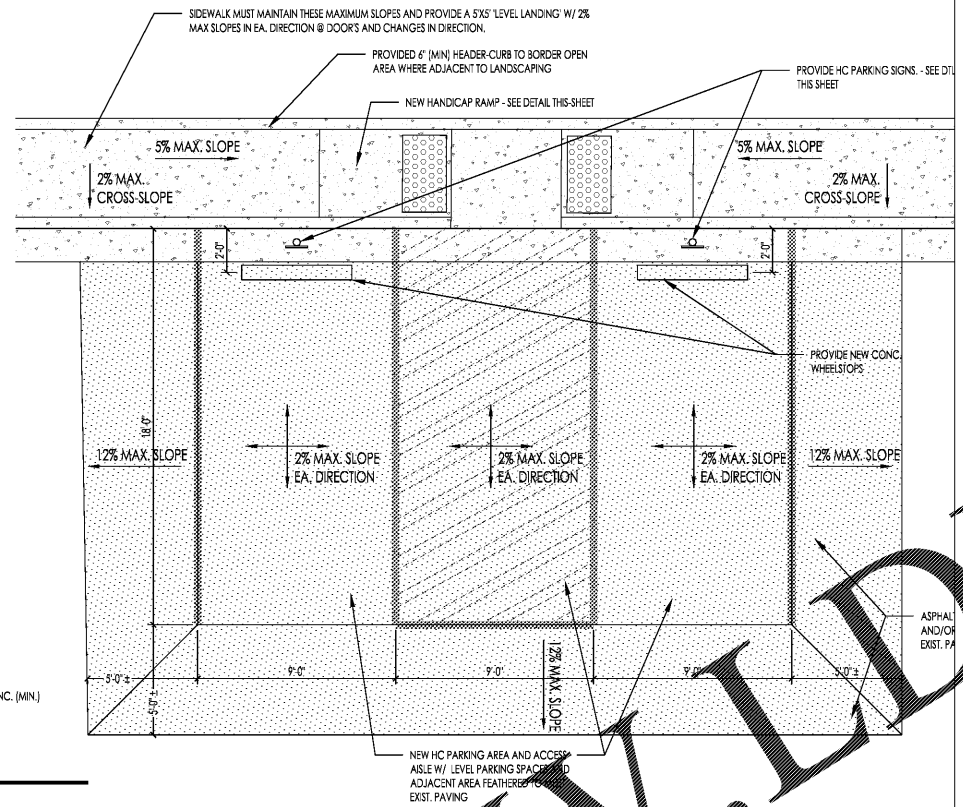


04 TYP. HC PARKING DETAIL
A0.2 SCALE: 1" = 1'-0"

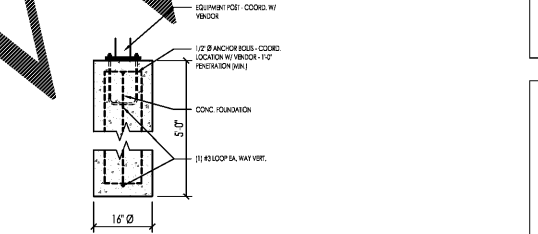

03 OCU/MENU/PRE-ORDER FOUNDATION
A0.2 SCALE: 1/2" = 1'-0"

NOTE: THIS FOUNDATION TO BE PROVIDED & INSTALLED BY OWNER / SIGN VENDOR

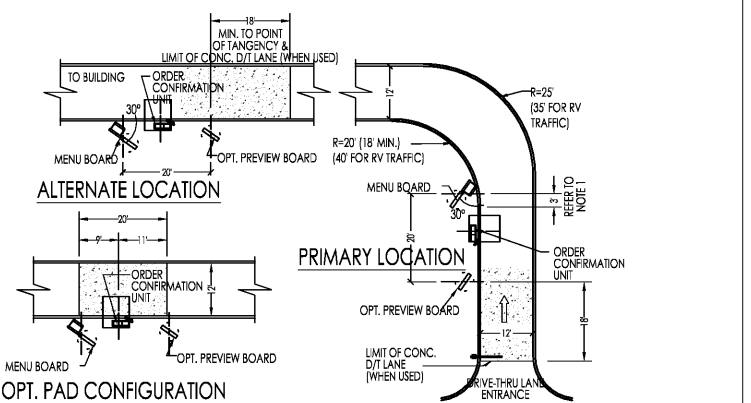

OPT. PAD CONFIGURATION


- DRAWING REFLECTS MENU BOARD IN "PREFERRED" LAYOUT. FOR "MINIMUM" LAYOUT AND ADDITIONAL INFORMATION, REFER TO SITE DETAIL C.A. 3' DISTANCE IS THE MAXIMUM DISTANCE FROM THE POINT OF TANGENCY TO THE CENTER OF THE MENU BOARD SUPPORT POST FOR THE "PREFERRED" LAYOUT (CLOSEST POSITION TO THE CURVE ALLOWED). FOR THE "MINIMUM" LAYOUT, THE CENTERLINE OF THE MENU BOARD SUPPORT POST MAY NOT BE CLOSER TO THE CURVE THAN THE POINT OF TANGENCY.
- ORDER CONFIRMATION UNIT SHOULD BE 100' (MIN.) FROM FOOD DELIVERY WINDOW.
- IN NO CASE SHOULD THE ORDER STATION BE PLACED ON THE CURVE.
- CONCRETE DRIVE-THRU LANE IS OPTIONAL. WHEN USED, IT IS TO BE CONTINUOUS AS INDICATED ON THIS DRAWING TO 9' PAST CENTER OF CUSTOMER COURTESY POST AS INDICATED ON DETAIL TEMPLATE VII OF VII. CONCRETE TO BE 3000 P.S.I., 6" THICK, WITH 4#x12.5Wx2.9 W.W.M. WITH PREMOULDED BITUMINOUS NON-EXTRUDING EXPANSION JOINTS AT 10' O.C. OPTIONAL TO POUR A 4" BASE SLAB OF 3000 P.S.I. CONCRETE IMMEDIATELY FOLLOWED BY A 2" SURFACE SLAB OF 3000 P.S.I. CONCRETE DYOED BLACK USING ADMIXTURE (CHROMIX C-24 "CHARCOAL" BY SCHOFIELD CO. OR EQUAL). INSURE THE 2" WEARING SURFACE BONDS TO THE BASE SLAB.
- IN LIEU OF FULL CONCRETE D/T LANE, 12' X 20' (MIN.) CONCRETE PAD MAY BE USED. (ALSO OPTIONAL)

02 DRIVE THROUGH CONFIGURATION
A0.2 NTS


PREVIEW AND MENUBOARD DECORATIVE ELEMENTS GUIDELINES:

REQUIRED AS PART OF THE 20/20 IMAGE FOR NEW CONSTRUCTION AND REMODELS, THE DECORATIVE LANDSCAPE WALL, OR SIGNAGE BASE WALL, SHALL BE USED AT THE DRIVE-THRU MENU BOARD AND PREVIEW BOARD.

- THE LANDSCAPE WALL SHALL BE CONSTRUCTED OF LANDSCAPE PAVESTONE, THE TYPICAL HEIGHT SHALL BE 8" - 12" ABOVE GRADE.
- THE SIGNAGE BASE WALL SHALL MATCH THE BUILDING WAINSCOT IN COLOR AND MATERIAL. IT SHALL EXTEND TO THE SIGNAGE HORIZONTAL TUBE SUPPORT.

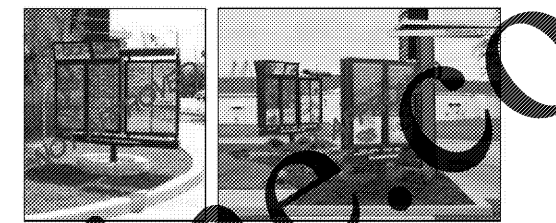

DECORATIVE LANDSCAPE WALL, SIGNAGE BASE WALL, DECORATIVE LANDSCAPE WALL

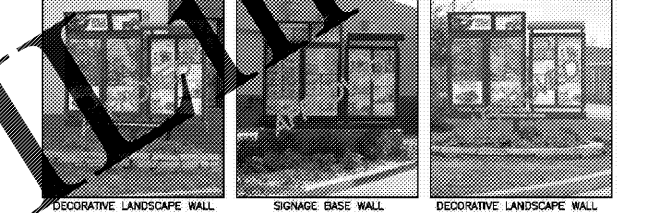


DECORATIVE LANDSCAPE WALL, SIGNAGE BASE WALL, DECORATIVE LANDSCAPE WALL

DECORATIVE LANDSCAPE WALL INSTALLATION:
REMOVE 6" TO 8" OF SOIL MATERIAL. COVER EXCAVATED AREA WITH LANDSCAPE FABRIC TO PROTECT BASE FROM SOIL. LEVEL EXCAVATED AREA WITH 3/4" GRAVEL, RAKE TO APPROXIMATE LEVEL, AND COMPACT PROPERLY. LAY OUT THE WALL WITH A STRING LINE, AND LAY THE PAVESTONE ALONG THE LINE. BURY THE FIRST LAYER 3/4 OF THE PAVESTONE HEIGHT, AND INSTALL THE NEXT COURSE USING LANDSCAPE BLOCK ADHESIVE BETWEEN EACH COURSE. BACKFILL WITH BLACK DIRT AND PLANT PER LANDSCAPE PLANS.


SIGNAGE BASE WALL INSTALLATION:
SIGNAGE BASE WALL SHALL BE CONSTRUCTED WITH FOOTINGS AND STRUCTURE DEPENDANT ON SOILS CONDITIONS.

YOUR INSTALLATION REQUIREMENTS WILL VARY ACCORDING TO YOUR SOIL OR GEOGRAPHICAL LOCATION. COMPLY WITH LOCAL REQUIREMENTS. CARE SHOULD BE TAKEN TO ENSURE ALL CONTROLS AND ACCESS PANELS ARE FULLY ACCESSIBLE.

BURGER KING	BURGER KING CORPORATION		DETAIL IX OF IX
	SCALE	1"=40'	
	DATE	2/17/06	
	REVISED	6/6/12	
GENERIC LANDSCAPE (PAGE 2)			

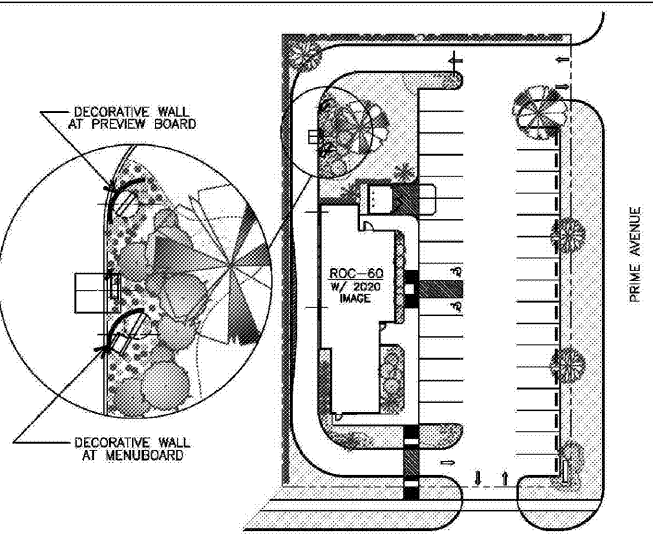

- NOTE:
- SITE DESIGN SHOWN IS FOR REFERENCE ONLY AND IS NOT INTENDED TO PRESENT A SITE SPECIFIC DESIGN SOLUTION. GEOGRAPHICAL AREA WILL DICTATE SPECIES OF PLANT MATERIAL.
 - MENUBOARD AND PREVIEW BOARD SHALL BE ACCENTED WITH A DECORATIVE LANDSCAPE WALL. WALL SHALL BE SIMILAR IN SIZE AND SHAPE TO DRAWING ABOVE.
 - THE USE OF STONE AND NATIVE PLANTS IS HIGHLY ENCOURAGED.



BURGER KING	BURGER KING CORPORATION		DETAIL IX OF IX
	SCALE	1"=40'	
	DATE	2/17/06	
	REVISED	6/6/12	
GENERIC LANDSCAPE (PAGE 1)			

01 TYP. LANDSCAPING
A0.2 SCALE: 1/8" = 1'-0"

NO.	DATE	CHECKED BY: ENR	DATE
1		ENR	
2		ENR	
3		ENR	
4		ENR	
5		ENR	
6		ENR	
7		ENR	
8		ENR	
9		ENR	
10		ENR	



PREMIER KINGS, INC.
5529 CARMICHAEL RD
MONTGOMERY, AL 36117
PHONE: (334) 312-0849

2126 Morris Avenue
Montgomery, AL 36103
Phone: (205) 322-2511
Fax: (205) 322-1778
email: info@hucksteina.com
www.hucksteina.com

James M. Huckstein
architect AIA
architecture • planning • interior design



PROJECT #1702037
IMAGE 20/20 - JULY 2012 STANDARDS
BURGER KING RENOVATION
154 S MAIN ST.
BAXLEY, GA 31513

CONSTRUCTION SITE PLAN DETAIL
A0.2