


11 TYPICAL CHANNEL BRIDGING DETAIL  
3/4" = 1'-0"

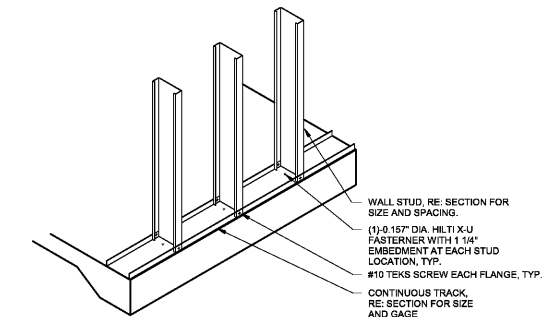


10 TYPICAL STUD TO TRACK DETAIL  
3/4" = 1'-0"


WINDOW AND DOOR OPENING SCHEDULE								
OPENING ID	HEADER SECTION	HEADER MEMBER SIZES	JAMB SECTION	JAMB MEMBER SIZES	JAMB HEAD CONNECTION TYPE	JAMB BASE CONNECTION TYPE	SILL SECTION	SILL MEMBER SIZES
DOOR UP TO 4'-8" WIDE		(2) 600S162-43 (2) 600T150-43		(1) 600S162-43 (1) 600T150-43	TYPE B	TYPE A	N/A	
WINDOW UP TO 4'-8" WIDE		(2) 600S162-43 (2) 600T150-43		(1) 600S162-43 (1) 600T150-43	TYPE B	TYPE A		(1) 600T150-43
OPERABLE WINDOWS	N/A			(1) 600S162-43 (1) 600T150-43	TYPE A	TYPE A		(2) 600S162-54 (50 KSI) (2) 600T200-68 (50 KSI)

NOTES:  
1. HEADER MEMBERS MUST SPAN CONTINUOUSLY OVER OPENINGS. HEADER MEMBERS SHALL BE UNPUNCHED.  
2. SPLICES ARE NOT PERMITTED IN HEADER, JAMB, OR SILL MEMBERS.


9 TYPICAL OPENING FRAMING  
3/4" = 1'-0"

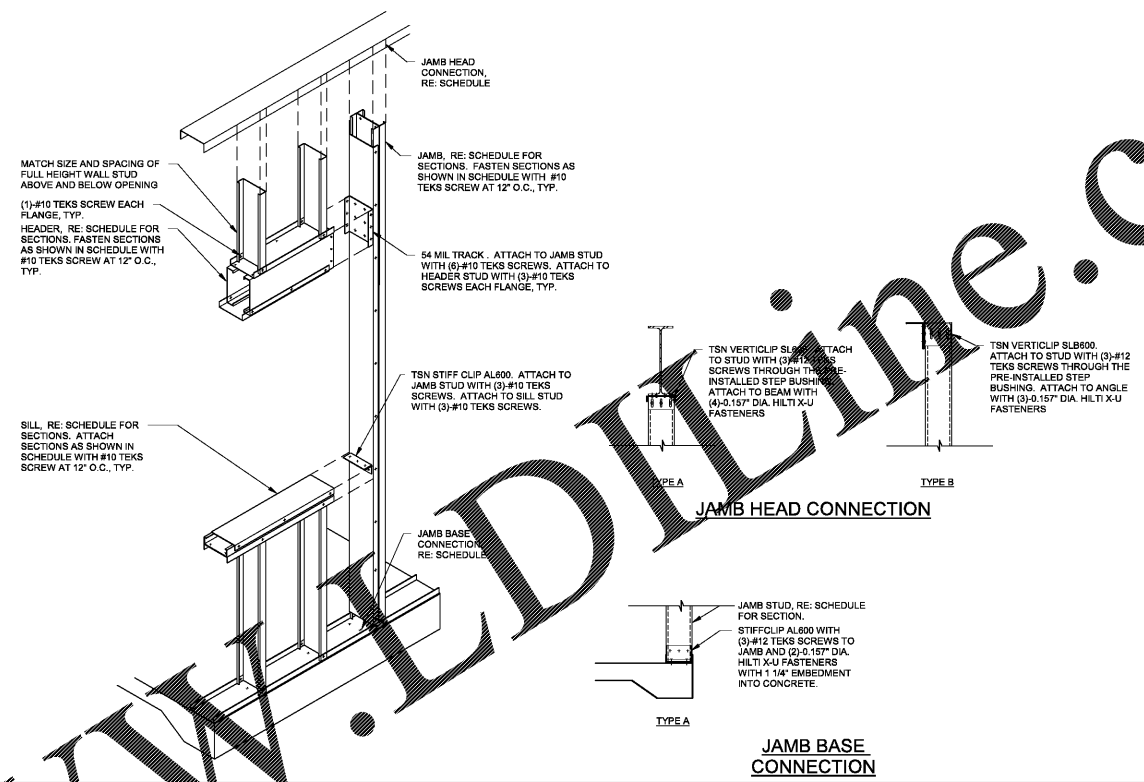


6 TYPICAL DETAIL - FRAME BELOW ROOF CURB  
1/2" = 1'-0"

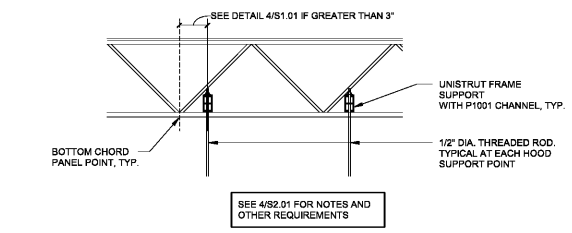


5 TYPICAL DETAIL - EXHAUST HOOD SUPPORT  
3/4" = 1'-0"

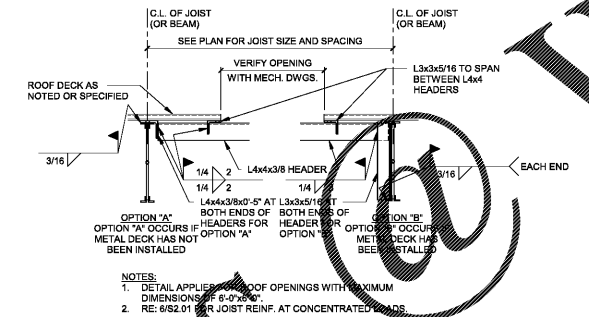


7 TYPICAL DETAIL - FRAMED ROOF OPENING  
3/4" = 1'-0"

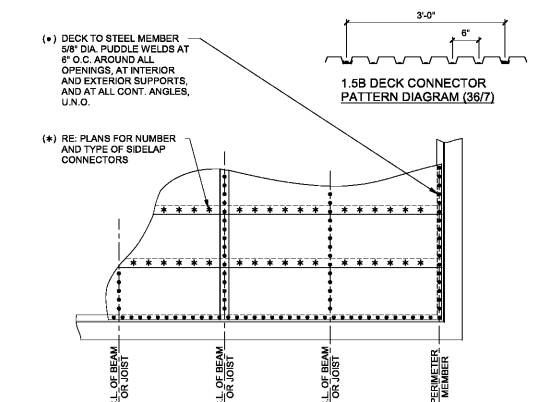


8 ROOF DECK DIAPHRAGM CONNECTION DIAGRAM  
3/4" = 1'-0"

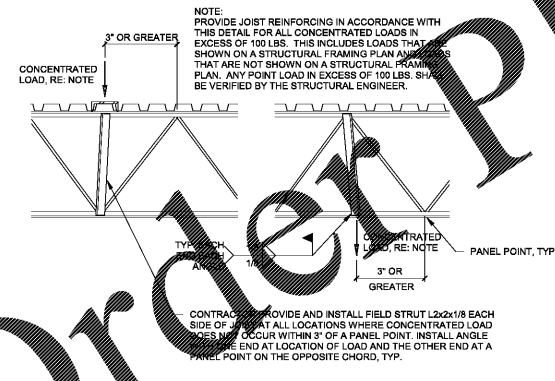


4 TYPICAL DETAIL - CONCENTRATED LOADS ON STEEL JOIST  
3/4" = 1'-0"

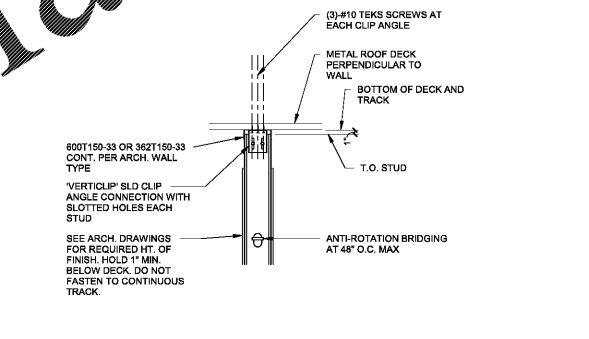

3 TYPICAL DETAIL - TOP OF STUD NON-LOAD BEARING WALL (PERPENDICULAR TO DECK)  
3/4" = 1'-0"

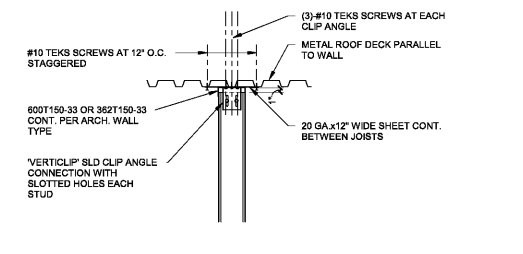

2 TYPICAL DETAIL - TOP OF STUD NON-LOAD BEARING WALL (PARALLEL TO DECK)  
3/4" = 1'-0"

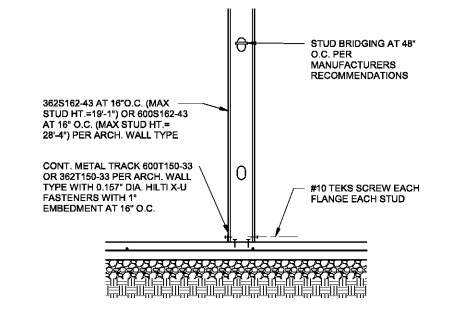

1 STUD WALL DETAIL  
3/4" = 1'-0"

Order Plans

WWW.WELDLINE.COM