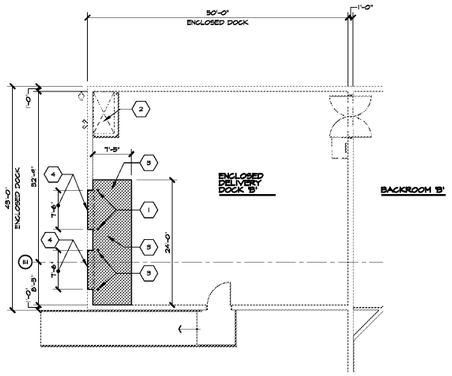

DELIVERY DOCK DEMOLITION PLAN

SCALE: 3/32" = 1'-0"

GENERAL DEMOLITION PLAN NOTES:

A. REFERENCE SHEET A0.1 FOR GENERAL DEMOLITION NOTES.

DEMOLITION PLAN KEYED NOTES: (X)

1. REMOVE EXISTING PROTECTIVE POST AS REQUIRED FOR NEW CONSTRUCTION.
2. EXISTING SPRINKLER VALVE AND RISER LOCATION - SEE PLUMBING DRAWINGS.
3. REMOVE SECTION OF CONCRETE FLOOR SLAB AND GRAVEL FILL AS REQUIRED FOR CONSTRUCTION/INSTALLATION OF NEW DOCK LEVELERS.
4. REMOVE SECTION OF EXISTING CONCRETE FOUNDATION WALL AS REQUIRED FOR NEW CONSTRUCTION/INSTALLATION OF NEW DOCK LEVELERS.

ASBESTOS NOTES:

1. KROGER TO PROVIDE TESTING FOR HAZARDOUS MATERIALS. IF REQUIRED, THE GENERAL CONTRACTOR WILL PROVIDE FOR ABATEMENT OF ASBESTOS.
2. IF ASBESTOS MATERIALS ARE ENCOUNTERED, THE CONTRACTOR IS HEREBY CAUTIONED THAT THE CUTTING AND/OR REMOVAL OF THIS MATERIAL MAY REQUIRE SPECIAL CARE AND HANDLING. THE CONTRACTOR SHALL NOTIFY THE KROGER PROJECT MANAGER IMMEDIATELY. IF ASBESTOS ABATEMENT IS REQUIRED BY GOVERNMENT AUTHORITIES, KROGER SHALL PAY THE ADDITIONAL COST, OR SHALL REMOVE THE MATERIAL UNDER A SEPARATE CONTRACT.
3. IT IS THE INTENT OF THE ARCHITECT AND THE OWNER THAT ALL BUILDING MATERIALS USED IN AND DURING CONSTRUCTION SHALL BE FREE OF ASBESTOS. SHOULD MATERIAL SPECIFIED BE FOUND TO CONTAIN ASBESTOS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY SO THAT AN ALTERNATE MAY BE SPECIFIED.
4. DOLLAR & EWERS ARCHITECTURE, INC. IS NOT INVOLVED IN THE ABATEMENT OR REMOVAL OF ASBESTOS MATERIAL OR THE SPECIFICATION OF THEIR HANDLING.

DEMOLITION HATCH PATTERN LEGEND

EXISTING INTERIOR CONCRETE SLAB TO BE REMOVED

REFERENCE DETAILS:

ASD-16/2A

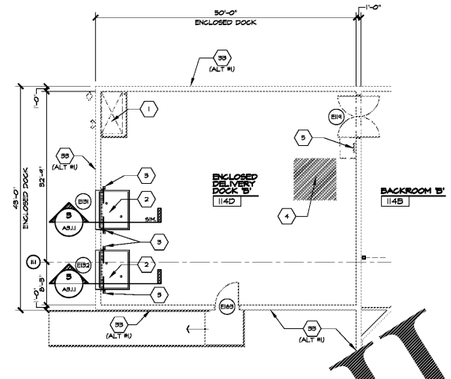

DELIVERY DOCK FLOOR PLAN

SCALE: 3/32" = 1'-0"

GENERAL FLOOR PLAN NOTES:

A. REFERENCE SHEET A1.1 FOR GENERAL FLOOR PLAN NOTES.

KEYED FLOOR PLAN NOTES: (X)

1. EXISTING SPRINKLER VALVE AND RISER LOCATION - SEE PLUMBING DRAWINGS.
2. DOCK LEVELER PIT - SEE ASD-15 (TYP.) - VERIFY PIT SIZE WITH KROGER PROJECT MANAGER.
3. NEW DOCK DOOR PROTECTOR, PROVIDED AND INSTALLED BY CONTRACTOR THROUGH "NATIONAL ACCOUNT" - REFERENCE ASD-15/2
4. CEILING ABOVE MAIN SWITCH GEAR & BALER, PROHIBIT WATER LINES, SPRINKLER LINES, REFRIGERATION LINES & DUCTWORK FROM THIS AREA.
5. EXISTING LADDER TO ROOF TO REMAIN.

PARTITION LEGEND

EXISTING MASONRY WALL, VERIFY SIZE AND HEIGHT IN FIELD.

EXISTING EXTERIOR VENEER & MASONRY WALL, VERIFY SIZE AND CONSTRUCTION IN FIELD.

REFERENCE DETAILS:

ASD-15/1, 15/2

SYMBOL LEGEND:

(1) DOOR SYMBOL, SEE SHEET A6.1 FOR DOOR SCHEDULE, ELEVATIONS AND DETAILS.

DELIVERY DOCK CONCRETE PLACEMENT PLAN

SCALE: 3/32" = 1'-0"

GENERAL CONCRETE PLACEMENT PLAN NOTES:

A. REFERENCE SHEET A1.2 FOR GENERAL CONCRETE PLACEMENT PLAN NOTES.

CONCRETE PLACEMENT PLAN KEYED NOTES: (X)

1. ALL CONCRETE WORK INDICATED ON THIS PLAN IS TO BE CONSIDERED EXISTING, UNLESS NOTED OTHERWISE.
2. DOCK LEVELER PIT - SEE ASD-15 (TYP.) - VERIFY PIT SIZE WITH KROGER PROJECT MANAGER.
3. REMOVE EXISTING CONCRETE SLAB IN SHADED AREA AS REQUIRED FOR NEW CONSTRUCTION REPLACE WITH NEW 4" THICK (MIN.) SLAB LEVEL WITH ADJACENT CONSTRUCTION. ALL CONCRETE SLABS TO BE REMOVED SHALL BE SAWCUT FOR A STRAIGHT TRUE JOINT. NEW CONCRETE SLABS SHALL BE DOWELED INTO EXISTING SLAB WITH #4 DOWELS x 18" LONG AT 24" O.C. TAP INTO 7/16" Ø x 5" HOLES DRILLED INTO EXISTING SLAB & EPOXY ANCHOR. REFERENCE ASD-6/5.
4. NEW 4" THICK (MIN.) CONCRETE SLAB. NEW SLAB SHALL BE FLUSH WITH TOP OF EXISTING CONCRETE SLAB. REFERENCE ASD-15/6 FOR CONTROL JOINTS

NEW CONCRETE FINISH LEGEND

NEW CONCRETE FINISH	COLOR
(TF2) SMOOTH FINISH W/ 2 COATS SEALER	GRAY (TYP.)

NOTICE:

(X) INDICATES FINISHED CONCRETE SLAB ELEVATION. SEE ELEVATION OF FLOOR DRAINS APPEAR ON PLUMBING PLAN.

REFERENCE DETAILS:

ASD- 6, 6/1, 15/6 & 15/8

LEGEND FOR HATCH PATTERN

NEW 4" THICK (MIN.) CONCRETE SLAB LEVEL WITH ADJACENT CONSTRUCTION.

NEW 4" THICK (MIN.) RECESSED AND/OR SLOPED CONCRETE SLAB.

DELIVERY DOCK REFLECTED CEILING PLAN

SCALE: 3/32" = 1'-0"

GENERAL REFLECTED CEILING PLAN NOTES:

A. REFERENCE SHEET A1.3 FOR GENERAL REFLECTED CEILING PLAN NOTES.

REFLECTED CEILING KEYED NOTES: (X)

1. EXISTING METAL DECK AND STEEL BAR JOIST TO REMAIN.
2. CEILING ABOVE MAIN SWITCH GEAR & BALER, PROHIBIT WATER LINES, SPRINKLER LINES, REFRIGERATION LINES & DUCTWORK FROM THIS AREA.
3. EXISTING LADDER AND ROOF HATCH TO REMAIN.
4. EXISTING SUSPENDED DOCK HEATER TO REMAIN.

CEILING PANEL LEGEND

(GYP) OPEN TO STRUCTURE

REFLECTED CEILING LEGEND:

EXPOSED EXISTING AND NEW ROOF STRUCTURE - PAINT EXPOSED IN "SALES AREA"

FLUORESCENT LIGHTING FIXTURES - REFER. ELEC'T. FOR SIZE & TYPE.

EXTERIOR WALL-MOUNTED LIGHT PACK

EMERGENCY/EXIT LIGHTING FIXTURE

MECHANICAL DIFFUSERS & GRILLES - REFER. MECHANICAL

Order Plans @ WWW.LDILine.COM

DOLLAR & EWERS ARCHITECTURE, INC.
E. Jackson Avenue • Jonesville, Louisiana 71343-2915
318-339-5405 • fax: 318-339-5406 • 318-673-3028
e-mail: dollar-ewers@dollar-ewers.com

STATE OF GEORGIA
BRIAN KEITH EWERS
REGISTERED ARCHITECT
12417

NO.	REVISIONS

A With-in-the-Walls Remodel for:

KROGER STORE #GA-414

4355 WASHINGTON ROAD, EVANS, GEORGIA 30809

DELIVERY DOCK PLANS, NOTES & LEGENDS

COPYRIGHT
ALL DRAWINGS, SPECIFICATIONS AND COPIES THEREOF FURNISHED BY DOLLAR & EWERS ARCHITECTURE, INC ARE AND SHALL REMAIN THE PROPERTY OF SAID ARCHITECTURE, INC. THEY ARE NOT TO BE USED ON ANY OTHER PROJECT AND ARE NOT TO BE LOANED WITHOUT THE WRITTEN PERMISSION OF SAID ARCHITECTURE, INC. THEY ARE TO BE RETURNED ON REQUEST AT THE COMPLETION OF THE WORK. SUBMISSION OR DISTRIBUTION OF THESE DRAWINGS TO MEET OFFICIAL REGULATIONS IS AUTHORIZED, BUT ANY OTHER USE OR REPRODUCTION WITHOUT THE EXPRESS WRITTEN CONSENT OF DOLLAR & EWERS ARCHITECTURE, INC. IS PROHIBITED. THIS DRAWING IS NOT TO BE CONSTRUED AS PUBLICATION IN DEROGATION OF DOLLAR & EWERS ARCHITECTURE, INC. COMMON LAW COPYRIGHT OR OTHER RESERVED RIGHTS.
COPYRIGHT

ISSUE DATE: JANUARY 29, 2018

PROJECT NO.: 217156

SHEET NUMBER: **A1.1.1**