

Order Plans



1 LIGHTING FLOOR PLAN
SCALE: 1/4"=1'-0"

LIGHTING GENERAL NOTES

- PRIOR TO ROUGH-IN, THE ELECTRICAL CONTRACTOR SHALL COORDINATE THE EXACT LOCATION OF ALL LIGHT FIXTURES / EXIT SIGN LOCATION / PLACEMENT WITH THE CITY OF COLLIERVILLE BUILDING INSPECTOR PRIOR TO ROUGH INSPECTION APPROVAL. ALL CONFLICTS SHALL BE REPORTED TO THE ENGINEER/ARCHITECT.
- ALL FIXTURES INSTALLED OUTDOORS SHALL BE RATED FOR DAMP/WET LOCATIONS AS REQUIRED. THE CONTRACTOR SHALL COORDINATE DAMP/WET LOCATION RATING PER NEC ARTICLE 410.10(A). ALL INSTALLATIONS SHALL CONFORM TO NEC ARTICLE 410, ALL SUB ARTICLES.
- ALL FLUORESCENT FIXTURES THAT UTILIZE DOUBLE ENDED LAMPS AND CONTAIN BALLAST(S) THAT CAN BE SERVICED IN PLACE SHALL BE CODE COMPLIANT WITH N.E.C. 410.130(G)
- COORDINATE ALL EXTERIOR BUILDING MOUNTED LIGHT FIXTURES WITH ARCHITECTURAL BUILDING ELEVATIONS FOR HEIGHTS AND LOCATIONS.
- PROVIDE EXIT SIGNS FOR ALL EXITS DESIGNATED BY THE CODE STUDY PLAN. REFER TO ARCHITECTURAL CODE PLANS FOR LOCATIONS AND REQUIREMENTS.
- ALL EXIT AND EMERGENCY LIGHTS SHALL BE CONNECTED TO UNSWITCHED CIRCUIT LEG.
- CONDUIT AND WIRING SHOWN FOR REFERENCE ONLY. IT IS THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR TO PROVIDE THE NUMBER OF CONDUCTORS REQUIRED FOR HOT-LEGS, NEUTRAL, AND GROUNDING AT EACH DEVICE FOR PROPER BRANCH CIRCUITING SHOWN FOR EACH AREA OR ROOM.


KEYED NOTES

- NEW EXTERIOR EMERGENCY EGRESS LIGHTING.
- PROVIDE LIGHTING SWITCH BANK (IN A FLUSH MOUNT BOX WITH CONCEALED CONDUITS) SEE DETAIL PER THIS SHEET. COORDINATE LOCATION WITH OWNER PRIOR TO INSTALLATION. VERIFY EXACT LOCATION WITH OWNER/ARCHITECT PRIOR TO INSTALLATION.

LIGHTING NOTE

ALL DOWNLIGHTS OVER SERVICE AREA SHALL BE EQUIPPED WITH SHATTER RESISTANT LAMPS.

FIXTURE/ITEM IDENTIFIED WITH LETTER:
 'E' - INDICATES EXISTING TO REMAIN.
 'N' - INDICATES NEW TO MATCH EXISTING.
 'R' - INDICATES EXISTING TO BE RELOCATED.
 'X' - INDICATES EXISTING TO BE REMOVED.

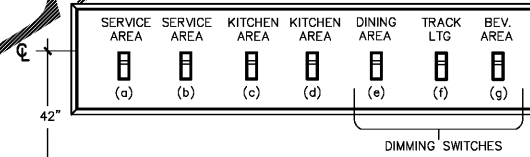

SWITCH BANK ELEVATION

LIGHTING CONTROL DEVICE SCHEDULE

| CALLOUT | SYMBOL | MANUFACTURE | CATALOG # | DESCRIPTION |
|-----------------------------|--------|-----------------|------------|---|
| LINE VOLTAGE CEILING SENSOR | | ACUITY CONTROLS | CMR-PDT-10 | CEILING MOUNT LINE VOLTAGE DUAL TECHNOLOGY SENSOR, EXTENDED RANGE 360 COVERAGE. |
| OCCUPANCY SENSOR SWITCH | | nLIGHT | WSX-PDT | LINE VOLTAGE WALL SWITCH DUAL TECHNOLOGY SENSOR. |

RUN RUN DESIGN

PROJECT NAME AND LOCATION :



STORE #785
975 W. POPLAR AVENUE
COLLIERVILLE, TN 38017

THIS DRAWING AND ITS CONTENTS ARE CONSIDERED INSTRUMENTS OF SERVICE AS SUCH THEY ARE COPYRIGHTED PROPERTY OF RUN RUN DESIGN, LLC. THE USE OF THESE DRAWINGS ARE LIMITED TO THIS SPECIFIC PROJECT AND ARE NOT TO BE OTHERWISE REPRODUCED IN ANY WAY OR USED FOR SUPPLEMENTAL LOCATIONS WITHOUT WRITTEN PERMISSION FROM RUN RUN DESIGN, LLC.

DRAWING REVISIONS:

| no. | distribution | date |
|-----|----------------|----------|
| A | ISSUE DATE | 12.21.17 |
| B | SUBMITTAL DATE | -- |
| no. | revision | date |
| 1 | -- | -- |
| 2 | -- | -- |
| 3 | -- | -- |

SHEET NAME:
LIGHTING FLOOR PLAN

PRELIMINARY NOT FOR CONSTRUCTION

Electrical Engineer
Omid Ardebili P.E.
8100 East Indian School Road Suite 203
T 480.361.6269 C 480.626.1838
Proj. Mgr: TME Proj. No.: 18111

project no: 17-085
dwg no:

E1.0