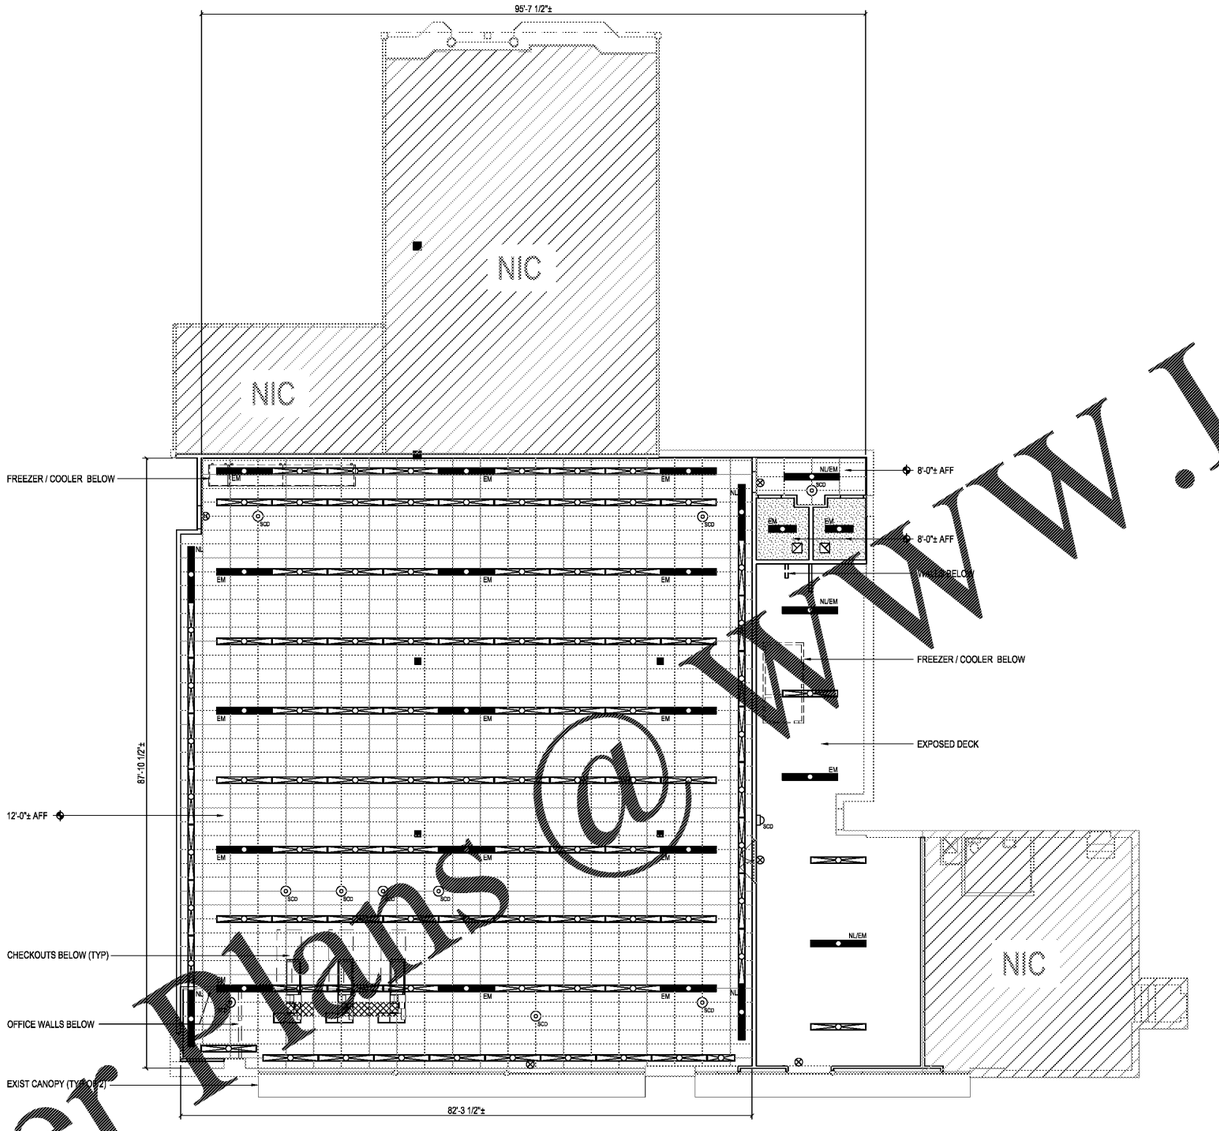

REFLECTED CEILING PLAN

SCALE: 1/8" = 1'-0"

PROJECT NORTH

NOTE: 1. SECURITY CAMERA DOMES, MIRROR PANELS, OCCUPANCY SENSOR AND POWER POLES (UON) ARE TENANT SUPPLIED / CONTRACTOR INSTALLED.

NOTE: 2. STOCKROOM LIGHTS MOUNTED AT 10'-0" AFF.

REFLECTED CEILING LEGEND

- EXIST 2'-0"X4'-0" ACOUSTICAL CEILING TILE AND GRID - SEE FINISH NOTE 4 ON SHEET A1.
- EXIST GWB - PAINT WHITE UNLESS OTHERWISE NOTED.
- EXIST 8'-0" STRIP LED LIGHT FIXTURE SURFACE MOUNTED TO GWB AND ACT CEILING.
- NL — EXIST 8'-0" STRIP LED LIGHT FIXTURE WITH LAMPS ON NIGHT LIGHT CIRCUIT SURFACE MOUNTED TO GWB AND ACT CEILING.
- EM — EXIST 8'-0" STRIP LED LIGHT FIXTURE WITH LAMPS ON EMERGENCY LIGHT CIRCUIT WITH BATTERY PACK SURFACE MOUNTED TO GWB AND ACT CEILING. FOR FIXTURES WITH 4 LAMPS, THE EMERGENCY BATTERY PACK WILL ONLY OPERATE 2 OF THE LAMPS.
- EXIST 4'-0" STRIP LED LIGHT FIXTURE SURFACE MOUNTED TO ACT AND GWB CEILING.
- EM — EXIST 4'-0" STRIP LED LIGHT FIXTURE WITH LAMPS ON EMERGENCY LIGHT CIRCUIT WITH BATTERY PACK SURFACE MOUNTED TO TO GWB AND ACT CEILING.
- EXIT LIGHT
- SCO — SECURITY CAMERA DOME
- SCO — SECURITY CAMERA DOME MTD ON WALL @ 10'-0" AFF.
- VENTILATION FAN
- CEILING HEIGHT ABOVE FINISH FLOOR
- MIRROR PANEL
- POWER POLE

WWW.LDILine.com
Order Plans@LDILine.com

RRMM ARCHITECTS, PC
1317 Executive Blvd, Suite 200
Chesapeake, VA 23320
(757)622-2828 / fax (757)622-6883

date	01/02/18
project	1617.17
designed	HDC
drawn	HDC
checked	DAE

mark	date	by	description
			revisions

project: DOLLAR TREE
DUTCH SQUARE MALL, DEAL #10811
COLUMBIA, SC

drawing: REFLECTED CEILING PLAN AND LEGEND

sheet: A2