NOTE:
2" DEEP GROOVE EVERY (1.5 x SIDEWALK WIDTH) FEET OR AT CHANGE OF DIRECTION; 1/2" EXP. JOINT EVERY 30 TO 36 FEET.

G1 CONCRETE SIDEWALK DETAIL NO SCALE



NOTE:
CONTRACTOR MAY ELECT TO UTILIZE CRUSHED RECYCLED CONCRETE IN LIEU OF STONE AS BEDDING AND BACKFILL MATERIAL.

G3 CURB & GUTTER DETAIL NO SCALE



G5 TYPE "N" CURB DETAIL NO SCALE



NOTES:
1. CONCRETE SHALL HAVE 28 DAY COMPRESSIVE STRENGTH OF 4000 PSI.
2. CONTRACTOR MAY ELECT TO UTILIZE CRUSHED RECYCLED CONCRETE IN LIEU OF STONE AS BEDDING AND BACKFILL MATERIAL.

G7 CONCRETE PAVEMENT DETAIL NO SCALE



NOTE:
CONTRACTOR TO SUBMIT JOINT SEALANT COLOR SAMPLES TO OWNER FOR COLOR SELECTION.

E1 CONCRETE ISOLATION JOINT NO SCALE



NOTE:
CONTRACTOR TO SUBMIT JOINT SEALANT COLOR SAMPLES TO OWNER FOR COLOR SELECTION.

E3 CONCRETE EXPANSION JOINT NO SCALE



E5 CONCRETE CONTROL JOINT NO SCALE

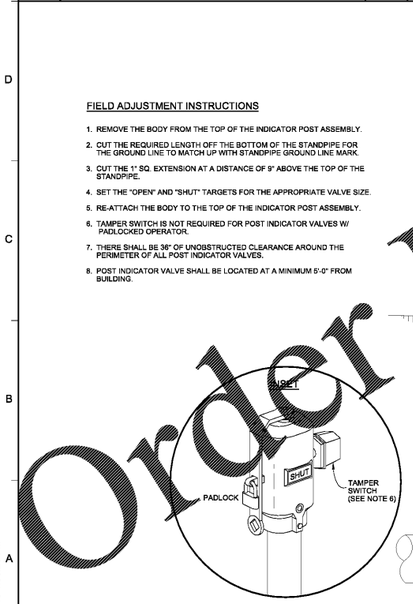

A1 STANDARD POST INDICATOR VALVE DETAIL NO SCALE

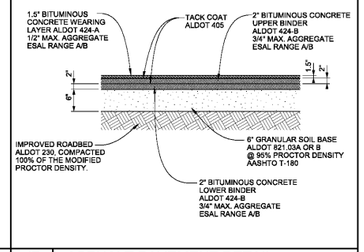

J7 ASPHALT PAVEMENT DETAIL NO SCALE

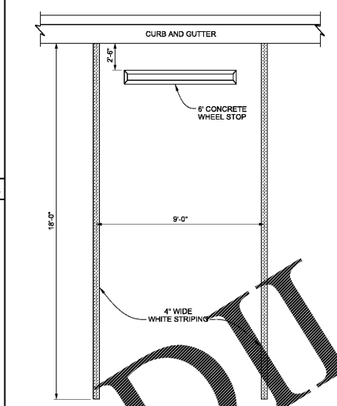

G9 PARKING SPACE DETAIL NO SCALE

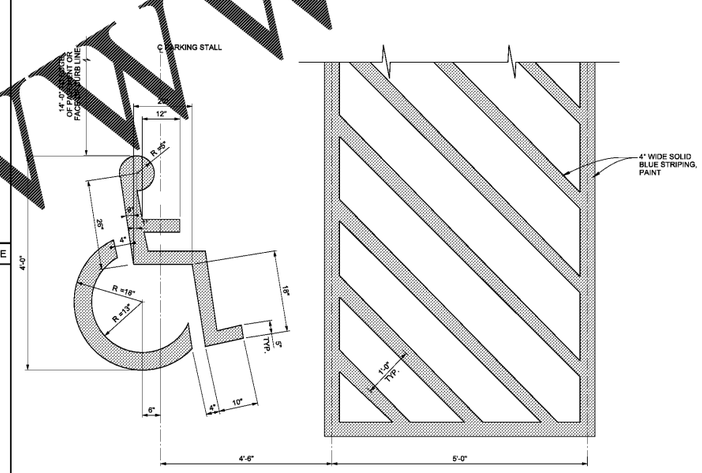

NOTE:
SHADING REPRESENTS BLUE PAINT.

C7 HANDICAP PARKING STRIPING DETAIL NO SCALE



1. CONCRETE SHALL HAVE 28 DAY COMPRESSIVE STRENGTH OF 3000 PSI.
2. SHALL INCLUDE GRAY TRUNCATED DOME WARNING MAT PER ADA REQUIREMENTS. MAT SHALL BE 2' IN LENGTH. WIDTH SHALL BE 6" LESS THAN THE WIDTH OF SIDEWALK AT STREET LEVEL.

A7 HANDICAP RAMP DETAIL NO SCALE



NOTE:
WHITE PAINT IN ACCORDANCE WITH PROJECT SPECIFICATIONS.

A9 STOP BAR DETAIL NO SCALE

GMC
2701 1st Avenue S
Birmingham, AL 35233
T 205.879.4462
GMCNETWORK.COM
KREBS ENGINEERING

05/25/18
ALABAMA LICENSED No. 35801 PROFESSIONAL ENGINEER JAMES ROSS TAYLOR

ISSUE	DATE
ISSUE FOR BID	2018.05.25

DRAWN BY: JHL
CHECKED BY: JRT

MISCELLANEOUS DETAILS

SIMULATION LABORATORY
BUILDING - USA JOB #16-07
MOBILE, ALABAMA
ABC #2017372
GMC # AMOB160019

C2.04

1/31/2018 1:58:26 PM

Order Plans @ WWW.LDILine.com