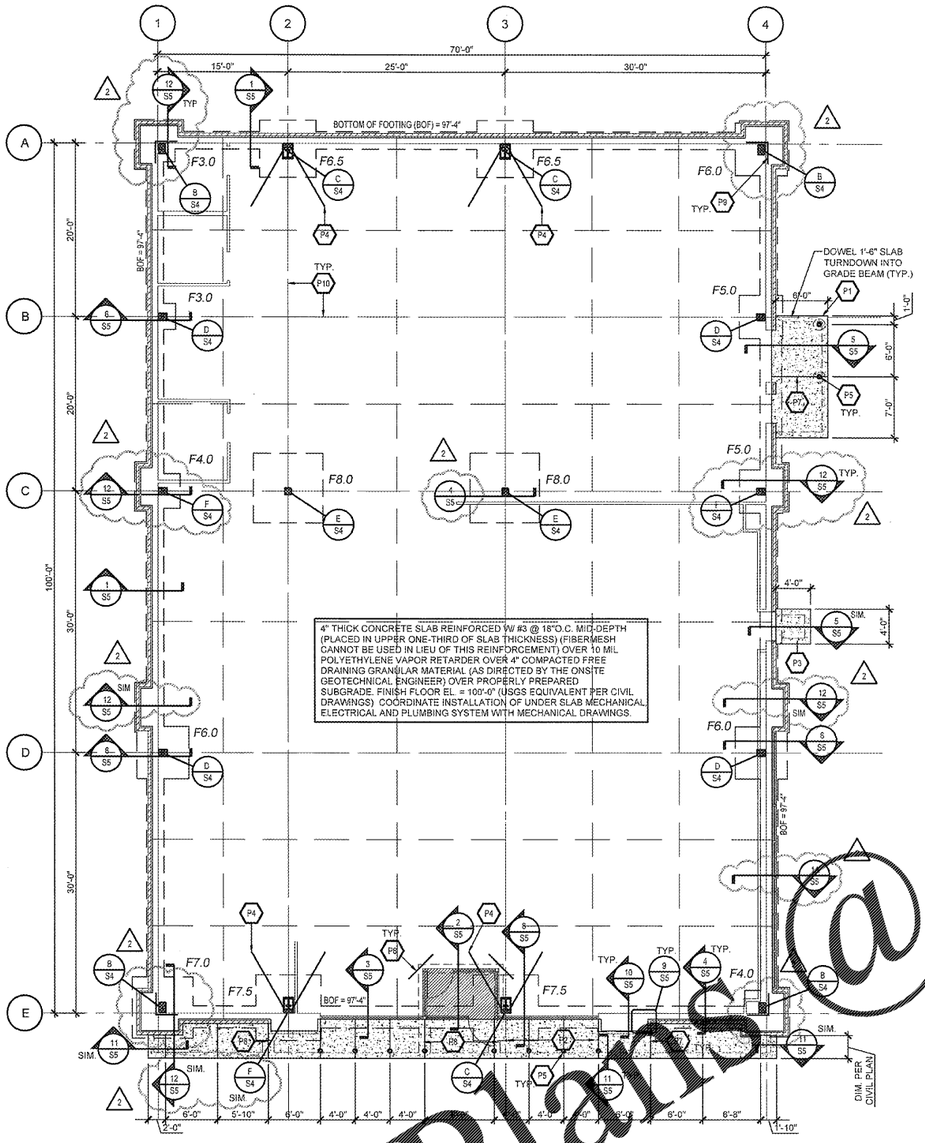

1 S2 FLOOR/FOUNDATION PLAN

SCALE: 1/8" = 1'-0"

NOTE:
MASONRY TEXTURES AND COLORS TO MATCH BUILDING. REFER TO ARCHITECTURAL DRAWINGS.

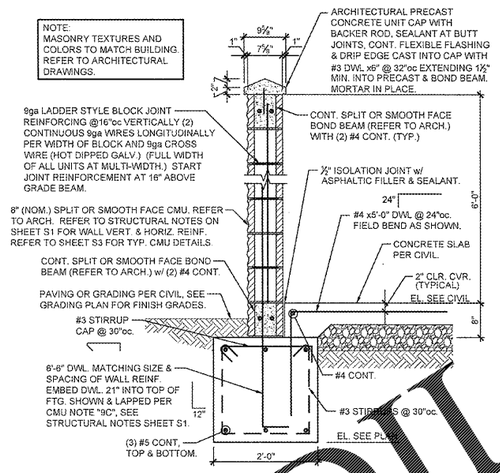

2 S2 TYPICAL TRASH/HVAC ENCLOSURE DETAIL

SCALE: 1/4" = 1'-0"

KEYNOTES:

- P1 — 6" CONCRETE SLAB WITH #4@12"oc EACH WAY MID-HEIGHT IN SLAB.
- P2 — SIDEWALK: PROVIDE 4" THICK CONCRETE REINFORCED WITH #3 @18"O.C. EACH WAY (PLACED IN UPPER ONE-THIRD OF SLAB THICKNESS) OVER 4" COMPACTED FREE DRAINING GRANULAR MATERIAL (AS DIRECTED BY THE ONSITE GEOTECHNICAL ENGINEER) ON PROPERLY PREPARED SUBGRADE. PROVIDE CONTROL AND ISOLATION JOINTS AS INDICATED. SEE CIVIL DRAWINGS FOR TOP OF CONCRETE SPOT ELEVATIONS.
- P3 — DOOR PAD: PROVIDE 4" THICK CONCRETE REINFORCED WITH #3 @18"O.C. EACH WAY (PLACED IN UPPER ONE-THIRD OF SLAB THICKNESS) OVER 4" COMPACTED FREE DRAINING GRANULAR MATERIAL (AS DIRECTED BY THE ONSITE GEOTECHNICAL ENGINEER) ON PROPERLY PREPARED SUBGRADE. PROVIDE CONTROL AND ISOLATION JOINTS AS INDICATED. SEE CIVIL DRAWINGS FOR TOP OF CONCRETE SPOT ELEVATIONS.
- P4 — SLAB HAIRPIN. SEE DETAIL 9/S4 (FIELD BEND HAIRPIN TO MISS FLOOR DRAIN WHERE REQUIRED.)
- P5 — STEEL BOLLARD: SEE SITE DEVELOPMENT PLANS WHERE APPLICABLE, ALIGN WITH CENTERLINE OF STOREFRONT MULLION.
- P6 — PROVIDE #4 x 4'-0" DOWEL TURNED 90 DEGREE AT SLAB INSIDE CORNERS.
- P7 — SIDE WALK CONTROL JOINT. SEE SECTION 1/S3.
- P8 — SIDE WALK EXPANSION JOINT. SEE SECTION 3/S3.
- P9 — 5'-0" 2'-6" x 2'-6" CORNER BARS AT MID-DEPTH IN 4" SLAB SECTION.
- P10 — CONSTRUCTION JOINT SEE DETAILS 1 & 2/S4.
- #5 x 5'-0" 2'-6" — CORNER BARS AT CORNERS OF WALL AND FOOTING PER 7/S4.

FOOTING SCHEDULE

MARK	FOOTING SIZE (W x L x T')	FOOTING REINFORCEMENT LONG.	TRANS.	BOTTOM OF FOOTING ELEVATION
F3.0	3'-0"x3'-0"x2'-0"	(6) #5	(6) #5	97'-4"
F4.0	4'-0"x4'-0"x2'-0"	(8) #5	(8) #5	97'-4"
F5.0	5'-0"x5'-0"x2'-0"	(10) #5	(10) #5	97'-4"
F6.0	6'-0"x6'-0"x2'-0"	(12) #5	(12) #5	97'-4"
F6.5	6'-6"x6'-6"x2'-0"	(12) #5	(12) #5	97'-4"
F7.0	7'-0"x7'-0"x2'-6"	(12) #5	(12) #5	97'-4"
F7.5	7'-6"x7'-6"x2'-6"	(14) #5	(12) #5	97'-4"
F8.0	8'-0"x8'-0"x2'-6"	(14) #5	(14) #5	97'-4"

NOTES.
1. ALL ANCHOR BOLTS SHALL BE SIZE, QUANTITY AND SPACING AS SPECIFIED BY THE PRE-ENGINEERED METAL BUILDING MANUFACTURER. MAINTAIN 3" MINIMUM CONCRETE COVER AROUND BOLTS. TIES SHALL WRAP AROUND ANCHOR BOLTS.
2. COLUMN BASE PLATES ARE TO REST ON TOP OF SLAB. PROVIDE LEVEL BEARING SURFACE FOR EVEN CONTACT.
3. COLUMN FOOTING REINFORCEMENT TO BE INTEGRAL WITH CONTINUOUS FOUNDATION REINFORCEMENT.
4. PROVIDE ANCHOR BOLT TEMPLATES AT COLUMN.
5. ALL SPREAD FOOTINGS ARE TO BE CENTERED BENEATH COLUMNS UNLESS NOTED OTHERWISE.

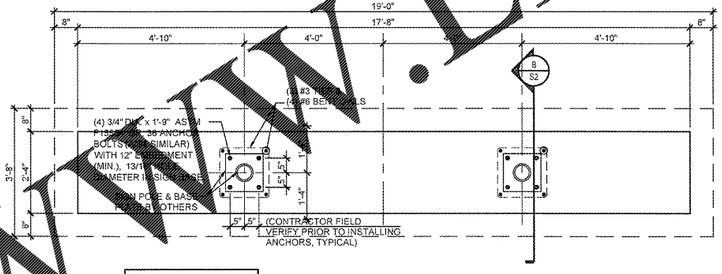

NOTE:
BRING TO THE ENGINEER'S ATTENTION ANY VARIANCE TO SPECIFIED ANCHOR, SIZE OR LAYOUT PRIOR TO ANCHORING SIGN.

A S2 SIGN FOUNDATION

SCALE: 1/2" = 1'-0"

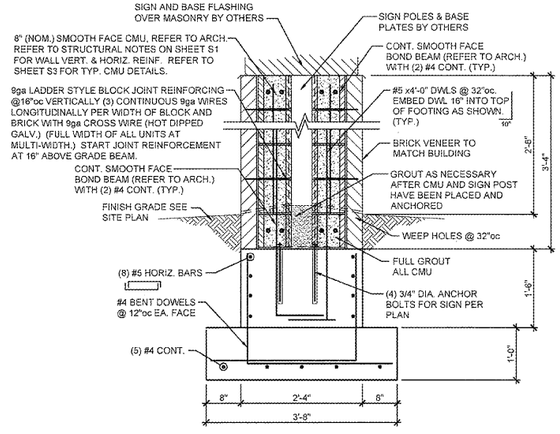

B S2 SECTION

SCALE: 3/4" = 1'-0"

BOB D. CAMPBELL & CO.
Structural Engineers Since 1957
4330 Belleview Ave. 816.531.4144
Kansas City, MO 64111 www.bdc-engrs.com

CRAIG A. SCHNEIDER, AIA
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.3345
Fax: 417.862.3345
e-mail: architect@estellyschneider.com

PROJECT:
NEW O'REILLY AUTO PARTS STORE
SLIDING HILL PLACE
ASHLAND, VA #2 - ASHLAND MAGISTERIAL DISTRICT

FOUNDATION PLAN

O'Reilly AUTO PARTS

CORPORATE OFFICES
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
(417) 862-2674 TELEPHONE

CONN #	3993
DATE:	2-24-17
REVISION DATE:	1 8-16-17
	2 11-16-17

Order Plans @ WWW.LDLine.com