



FIXTURE TYPE "W"

FEATURES & SPECIFICATIONS

INTENDED USE — LB provides a slight lighting platform to deliver general ambient lighting for surface-mount applications. Light engine efficiency, life and excellent color-rendering quality, low-maintenance light installation.

CONSTRUCTION — Metal housing available in powder-coated, brushed or polished finish. 8000-series with specially selected aluminum end. Continuous side hinges on larger body provide slight lip and continuous diffuser support to prevent accidental opening and simplify maintenance.

Finish — Five-stage zinc phosphate pretreatment process superior paint adhesion and rust resistance. Powder coats finished with high-gloss, high-reflectivity baked white powder enamel (see VOC).

OPTICS — Lensed symmetric diffuser with black side panels and highly transmittive epoxy resin lens lens frame and provides high-angle lightness control. Lenses and glass reflector approved for improved aesthetics.

ELECTRICAL — Long-life LEDs, coupled with high efficiency drivers, provide extended service life. LB is rated to deliver L70 performance at 50,000 hours.

LISTINGS — CSA certified to UL and Canadian standards. Dimmable.

DesignLight Consortium (DLC) qualified product. For all versions of this product may be DLC qualified. Please check the DLC Qualified Product List at www.designlight.org/DLC to confirm which version is qualified.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.lithonia.com/Products/Support/Service/Service%20Manual%20-%20LED%20Series.aspx


Site: Specifications subject to change without notice.

Sub: _____
Type: _____


LED Wraparound

Contractor Select

2' and 4' LED



All dimensions are in inches. Dimensions unless otherwise indicated.




LBL LED Wraparound


FIXTURE TYPE "W"

PHOTOMETRICS

LBL LPR35, 2016.5 delivered lumens, test no. L1122712, tested in accordance to IESNA LM-79

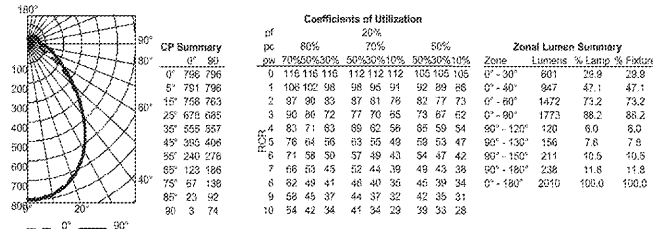


LBL LPR35, 4096.9 delivered lumens, test no. L1122575, tested in accordance to IESNA LM-79

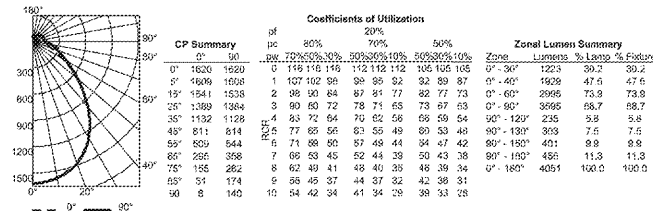

Listing Number	SKU	Description	Length	Width	Depth	Weight	Material	Finish	Price	Lead Time
18.117852	753672012564	2' LED Wraparound	2.880	15.888	2.640	1.30	303K	Polished #11 anod.	36	112
18.117940	753672012535	2' LED Wraparound	2.880	15.888	2.640	1.30	303K	Polished #11 anod.	36	112
18.117816	753672012512	4' LED Wraparound	4.800	15.888	2.640	2.10	303K	Polished #11 anod.	36	112
18.117815	753672012519	4' LED Wraparound	4.800	15.888	2.640	2.10	303K	Polished #11 anod.	36	112
18.117814	753672012518	5' LED Wraparound	4.800	15.888	2.640	2.10	303K	Polished #11 anod.	36	112

Notes:
1. Not for sale outside the U.S.
2. Non-qualified suppliers may not be able to supply this product.
3. See distributor for more information.


LITHONIA LIGHTING
AECOM Building Solutions Company
1000 Peachtree Street, NE, Atlanta, GA 30309 | Phone: 800-499-1700 | Fax: 101-629-9292 | www.lithonia.com | © 2015 Lithonia Lighting Inc. | Rev. 11/2015

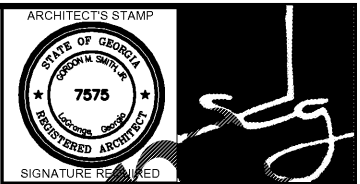

SMITH DESIGN GROUP, INC.
201 WEST JACKSON STREET
LAGRANGE, GEORGIA 30240
706-882-5511 | www.SDGarch.net

FIXTURE TYPE "W"

Model: LBL-4 | Series: 4210101007 | Store: 5017-4100001595

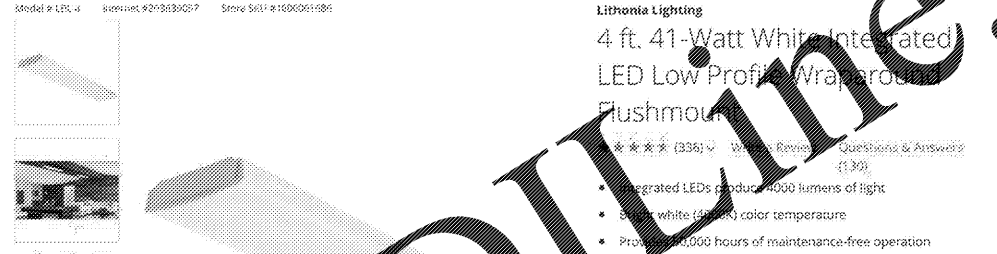

Lithonia Lighting
4 ft. 41-Watt White Integrated LED Low Profile Wraparound Flushmount
Flushmount
*** (336) ***
Integrated LEDs produce 4000 lumens of light
Soft white (4000K) color temperature
Provides 50,000 hours of maintenance-free operation

\$109.00 each

Choose Your Options
Product Depth (in.):
48
Actual Color Temperature (K):
4000
Package Quantity:
1

FIXTURE TYPE "P"

Sea Gull Painted Shade Pendants LED Antique Today \$112.60
Details & Specs | Customer Reviews | Q & A | Tips & Inspiration | Shipping & Returns

ITEM#: 18106655
The Sea Gull Lighting Painted Shade Pendants light indoor pendant in antique brushed copper enhances the beauty of your home with ample light and style to match today's trends. The Painted Shade pendant collection by Sea Gull Lighting features steel construction and is available in seven outer colors: Polished Stainless, Painted Brushed Stainless, Emerald Green, and Painted Antique Brushed Copper. All with a White interior inspired by classic greenhouse light. You may use globe or LED bulbs. Increase light output and a finish choice. \$449 of outdoor cord included for customizing the installation. All of these features are available to LED by purchasing the replacement lamp sold separately.

Feature	English	(English)
Type	Transitional	
Material	Metal, Steel	
Type	Globe	
Finish	Antique	
Light Bulb Type	LED	
Lighting Style	Transitional	
Lighting Type	Pendant Lighting	
Product Features	UL Listed	
Dimensions	15.75 inches in diameter, 8.25 inches high	
Warranty	5 year Limited Manufacturer	
Model Number	651991S-05	
Country of Origin	China	

Seagull lighting- painted shade Pendant, led 6519 with metal downrods.

FIXTURE TYPE "UC"

Hard wired, at closets provide 2.4" with door switch
Indoor General Purpose

FEATURES & SPECIFICATIONS
INTENDED USE
Provides task or accent lighting in commercial, retail, hospitality and residential applications. Ideal for use under and over cabinets, display cases, task lighting, office lighting, covers and utility/work areas.
CONSTRUCTION
Low profile design, with on/off rocker switch. Can be direct wired or powered by 3' cord and plug (not included, see accessories). Connect up to 324 watts of fixtures with 1/2" connector cord or 7/8" end row recessor (sold separately).
ELECTRICAL
Long-life LEDs, coupled with a high efficiency driver, provide extended service life. Fixture is rated to deliver L70 performance at 50,000 hours and operates at 125 volts, 60Hz. Minimum starting temp -20F. Can direct wire through rear access plate/hood by utilizing the included Romex connector or by utilizing the optional LED JB Junction/Cable Box (sold separately).
INSTALLATION
Works with most standard fluorescent dimmers (see list of approved dimmers).
WARRANTY
5-year limited warranty. Complete warranty terms located at: www.lithonia.com/Products/Support/Service/Service%20Manual%20-%20LED%20Series.aspx
NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

SPECIFICATIONS	1'	2'	3'	4'
Lumens (3000K)	395	742	1162	1603
Watts (3000K)	3.8	8.2	12.3	16.5
Lumens per watt:	67	73	79	82
Length:	12 (30.5)	24 (61)	36 (91.4)	48 (121.9)

Order Plans

REVISIONS	
DATE	DESCRIPTION

PROJECT:
VERNON ROAD FIRE STATION
VERNON ROAD
LAGRANGE GEORGIA

TITLE:
LIGHTING FIXTURE CUT-SHEETS

MODIFIED DATE: _____ JOB NO: 1731
ISSUED DATE: FOR BID AND PERMIT SHEET: E-15
07 MAY 2018