

Owner:
Georgetown County
716 Prince Street
Georgetown, SC 29442


SGA ARCHITECTURE
ARCHITECTURAL ENGINEERING
LANDSCAPE ARCHITECTURE
Powleys Island / Charleston / GREENVILLE
8245 Ocean Hwy. / PO Box 1859
Powleys Island, SC 29585
Phone: 843.237.2421 / Fax: 843.237.1992
www.sgaarchitecture.com

Civil Consultant:
ETS
ENGINEERING AND TECHNICAL SERVICES, INC.
CONSULTING ENGINEER
98 Colletonville Lane
Georgetown, SC 29426
Phone: (843) 237-2022 Fax: (843) 237-2266

MEP Consultant:
Charleston Engineering
173 B Wagon Creek Dr.
Charleston, SC 29412
843-762-4342
Mechanical, Plumbing & Electrical

Structural Consultant:
WEATHERLY STRUCTURAL ENGINEERS
1000 North Main Street, Suite 100
Georgetown, SC 29426
843-762-4342

Irrigation Consultant:
WEATHERLY STRUCTURAL ENGINEERS

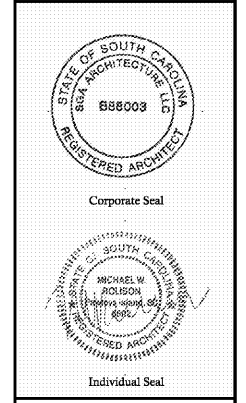

MEMBERS OF THE AMERICAN INSTITUTE OF ARCHITECTS
COPYRIGHT 2018 ALL RIGHTS RESERVED
PRINTED OR ELECTRONIC DRAWINGS AND DOCUMENTATION MAY NOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION FROM SGA ARCHITECTURE



Job Number: 17070
Date: 02/16/18
Drawn by: PW_MJR
Checked by: MR

Notes:
BIDDING DOCUMENTS
Not for Construction

Revisions:

Plant Details & Schedule

L202
4 of 6

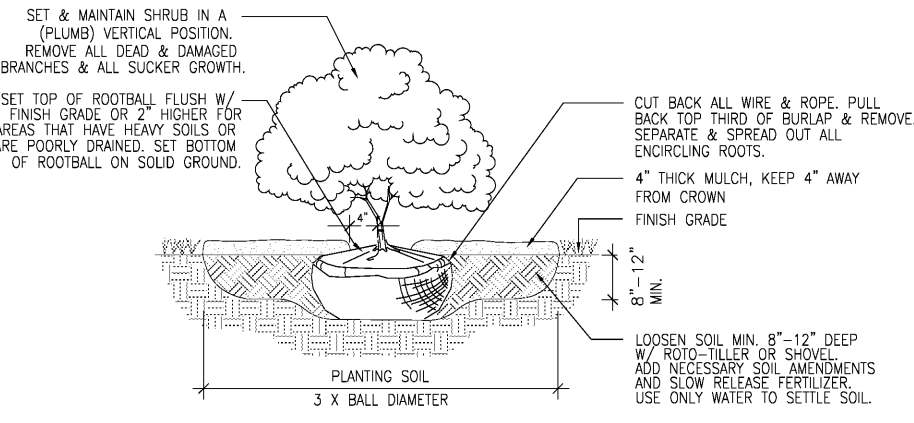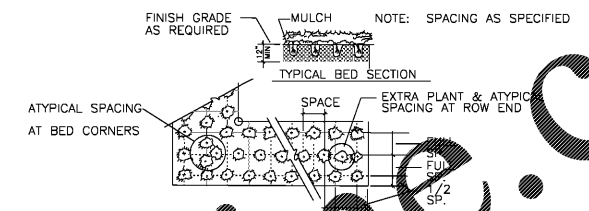

B3 SHRUB DETAIL
N.T.S.


Trees	Quantity	Botanical/Common	Cont	Cal	Height	Spread	Spacing	Remarks
CORK	1	Cornus kousa / Kousa Dogwood	30 gal	3" Cal	8'-10'	6'-8'		Specimen
LAGI	4	Lagerstroemia x 'Natchez' / White Crape Myrtle	65 gal	3" Cal	12'-14'	6'-8'		Mult Stem Specimen
MAGV	3	Magnolia virginiana / Sweet Bay	30 gal	3" Cal	8'-10'	6'-8'		Mult Stem Specimen
QUEV	16	Quercus virginiana 'High Rise' / High Rise Live Oak	45 gal	3" Cal	12'-14'	6'-8'		Specimen
Shrubs								
ILEC	66	Ilex cornuta 'Nessa' / Cane Holly	7 gal		2'-3'	2'-3'	36" o.c.	Full Container
ILEV	4	Ilex verticillata / Winter Holly	15 gal		4'-5'	4'-6'	96" o.c.	Full Container
ILEF	3	Ilex x aemulata 'Foster's Holly' / Foster's Holly	30 gal		6'-8'	4'-6'	96" o.c.	Full Container
ILEN	2	Ilex x 'Nellie R Stevens' / Nellie Stevens Holly	30 gal		6'-8'	4'-6'	96" o.c.	Full Container
RHAI	454	Raphanopis indica 'Wilcor' / Spring Sonata Indian Hawthorne			2'-3'	2'-3'		Full Container
LORC	49	Loropetalum chinense 'Sizzling Pink' / Sizzling Pink Fringe Floe	7 gal		2'-3'	2'-3'	72" o.c.	Full Container
VIBS		Viburnum suspensum / Sandankwa Viburnum	7 gal		2'-3'	2'-3'	72" o.c.	Full Container
Groundcovers								
JUNC	684	Juniperus conferta 'Blue Pacific' / Blue Pacific Juniper	3 gal				36" o.c.	Full Container
LANC	250	Lantana camara 'New Gold' / New Gold Lantana	1 gal				24" o.c.	Full Container
LIRP	1619	Liriope muscari 'Super Blue' / Super Blue Liriope	1 gal				18" o.c.	Full Container
Seed								
CYN	111887 sq.ft	Cynodon dactylon '419 Hybrid' / Bermuda Grass	seed					Hydroseeded
CYN	62931 sq.ft.	Cynodon dactylon '419 Hybrid' / Bermuda Grass	sod					Freshly Harvested

GENERAL PLANT NOTES


- THE CONTRACTOR SHALL LOCATE ALL PROPOSED & EXISTING UTILITIES PRIOR TO THE BEGINNING OF WORK. THE CONTRACTOR SHALL REPAIR ANY DAMAGE TO UTILITIES THAT ARE DISTURBED AS A RESULT OF THE WORK.
- THE CONTRACTOR SHALL MAINTAIN ALL GRASSED AREAS, INCLUDING THE REPAIR OF EROSION AREAS, UNTIL GRASS HAS REACHED THE LEVEL OF FINAL ACCEPTANCE & THROUGHOUT MAINTENANCE CONTRACT PERIOD IF APPLICABLE.
- ALL AREAS THAT ARE DISTURBED BY CONSTRUCTION INSIDE OR OUTSIDE THE LIMIT OF WORK SHALL BE REPAIRED, GRADED, & GRASSED.
- ALL PLANT BEDS SHALL RECEIVE PINE NEEDLE MULCH TO A DEPTH OF 4".
- ALL EXISTING TREES TO BE SAVED WILL HAVE TREE BARRICADES INSTALLED AROUND THEM PRIOR TO BEGINNING OF DEMOLITION. ALL WORK IN THOSE AREAS TO BE DONE BY HAND. FENCES SHALL BE MAINTAINED & KEPT IN PLACE AT ALL TIMES.
- PROVIDE EROSION CONTROL WHERE SLOPES ARE GREATER THAN 3:1 & WHERE EROSION KEEPS RE-OCCURRING.
- ALL TREE, SHRUB & GROUNDCOVER MATERIALS SHALL BE PLANTED WITHIN 24 HOURS AFTER DELIVERY.
- APPLY WEED GERMINATION INHIBITOR ("GREEN" OR EQUAL) TO ALL PLANTBED AREAS. REFER TO SPECIFICATION 02900.
- ANY PLANTS LOCATED IN DIRECT SUN SHALL BE NURSERY SUN GROWN.
- METAL EDGING SHALL BE PLACED AROUND ALL PLANTING BEDS THAT ABUT GRASSED AREAS AND TREE ISLANDS. CONTRACTOR WILL MIX 40LBS(SHREDDED PINEBARK) AND 40LBS(COMPOSTED COW MANURE) PER 25 SQUARE FEET IN PLANT BEDS TO A DEPTH OF 12".
- ALL TOPSOIL IS TO BE STOCKPILED FOR RE-USE IN LANDSCAPE WORK. SEE SPECIFICATIONS.
- CONTRACTOR IS RESPONSIBLE FOR PLANT QUANTITIES ON LANDSCAPE PLAN NOT IN PLANT SCHEDULE.

NOTE: LANDSCAPE ARCHITECT SHALL SELECT OR REVIEW ALL TREE MATERIAL AND PLANTS DESIGNATED AS SPECIMENS PRIOR TO INSTALLATION.


H2 PLANT SCHEDULE & NOTES
N.T.S.

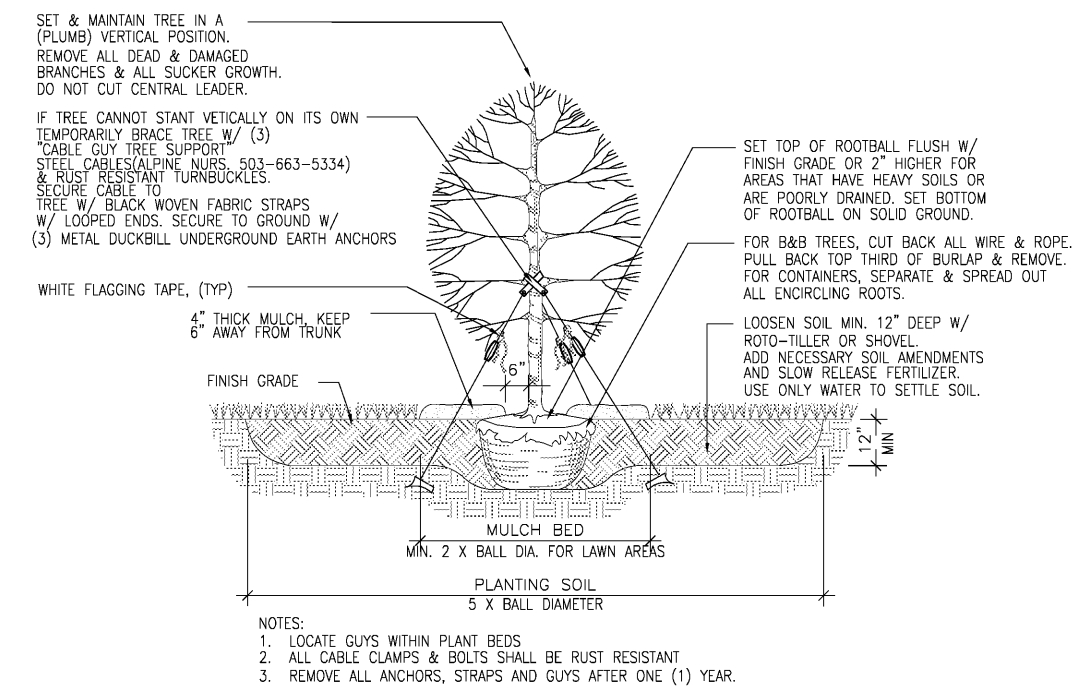

B1 TREE DETAIL
N.T.S.

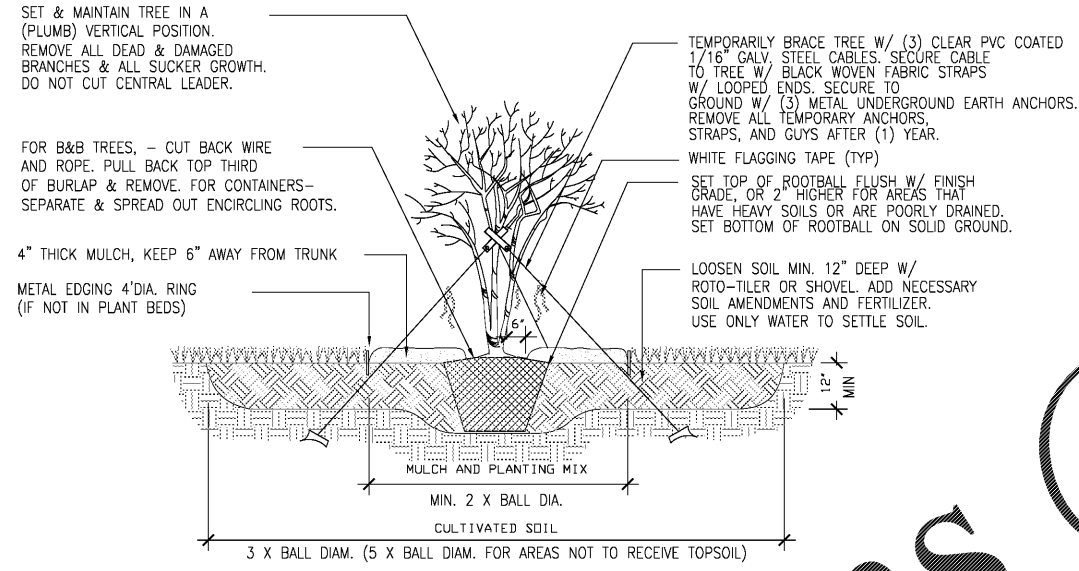

D1 MULTI-STEMMED TREE DETAIL
N.T.S.

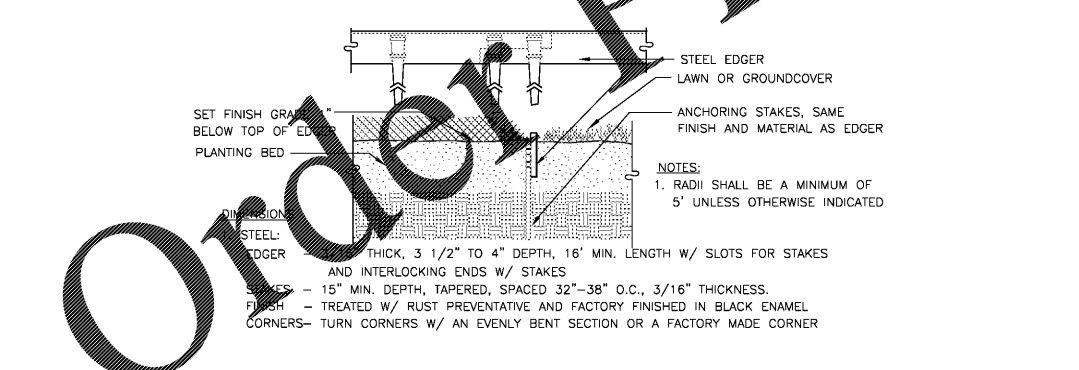

H1 METAL EDGING
N.T.S.