

GENERAL NOTES:

- 1. ALL CONSTRUCTION IS TO BE IN ACCORDANCE WITH GDOT STANDARD SPECIFICATIONS FOR CONSTRUCTION OF TRANSPORTATION SYSTEMS, 2013 EDITION.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL SITE DEBRIS (LANDSCAPE PLANTING, EXISTING TREES, ROCKS, ETC) TO CONSTRUCT PROPOSED WALK.
3. THE COST FOR REMOVAL AND DISPOSAL OF EXISTING CONCRETE, EXISTING ASPHALT PAVEMENT, AND EXISTING CONSTRUCTION DEBRIS ITEMS TO BE INCLUDED IN THE BID PRICE FOR 'GRADING COMPLETE'.

GRADING AND DRAINAGE NOTES:

- 1. ALL STRUCTURAL FILL AREAS TO BE CONSTRUCTED IN ACCORDANCE WITH GDOT STANDARDS.
2. IF EXCAVATED MATERIAL IS UNSUITABLE FOR COMPACTION, AS DETERMINED BY THE SOILS TESTING LABORATORY. THE CONTRACTOR SHALL FURNISH SUITABLE BORROW.
3. CUT OR FILL SHALL BE GRADED AS NOTED, OR INDICATED IN TYPICAL SECTIONS, DRIVEWAY PROFILES, CROSS SECTIONS AND OR WALL PROFILES.

LANDSCAPE PLANTING NOTES:

- 1. PRIOR TO CONSTRUCTION COMMENCING, THE CONTRACTOR SHALL COORDINATE MEETING WITH CITY PROJECT MANAGER AND ARBORIST TO CONFIRM REMOVAL OF ALL TREES WITHIN THE PROJECT LIMITS.
2. THE TREES THAT ARE TO REMAIN WITHIN THE PROJECT MAY REQUIRE SELECTIVE PRUNING BY A CERTIFIED ARBORIST TO PROVIDE A MIN OF 8' CLEARANCE.
3. ALL TREE PRUNING AND REMOVAL IS TO BE COMPLETED BY A CERTIFIED ARBORIST.

PROJECT SPECIFIC NOTES:

- 1. THIS PROJECT IS LOCATED 100 PERCENT WITHIN CONGRESSIONAL DISTRICT NO. 11.
2. THIS PROJECT IS LOCATED 100 PERCENT WITHIN CITY OF SANDY SPRINGS, FULTON COUNTY.
3. ALL COSTS FOR EARTHWORK AND GRADING SHALL BE PAID FOR AT THE PRICE BID FOR GRADING COMPLETE - LUMP SUM. THE CONTRACTOR WILL BE RESPONSIBLE FOR FURNISHING SUITABLE BORROW MATERIAL FOR THIS PROJECT, AND DISPOSE OF ANY UNSUITABLE OR WASTE MATERIAL. ALL FILL AREAS MUST BE COMPACTED TO MINIMUM 95% STANDARD PROCTOR ALL AREAS WITHIN THE PROJECT LIMITS TO BE FINE GRADED AS OUTLINED IN SPECIFICATIONS. THE COSTS FOR CLEARING AND GRUBBING, MOBILIZATION, AND SAWCUT OF PAVEMENT (ASPHALT AND CONCRETE) TO BE INCLUDED IN THE BID PRICE FOR 'GRADING COMPLETE'.

UTILITY OWNERS table with columns: NAME, SERVICE, ADDRESS, CONTACT, PHONE NO. Includes entries for AT&T, COMCAST COMMUNICATION, ATLANTA GAS LIGHT RESOURCES, COLONIAL PIPE LINE, PLANTATION PIPELINE, GEORGIA POWER, CITY OF SANDY SPRINGS DEPT. OF WATERSHED MANAGEMENT, FULTON COUNTY, GWINNETT COUNTY, and DEKALB COUNTY DEPT. OF WATERSHED MANAGEMENT.

- 6. AT LOCATIONS WHERE NEW PAVEMENT OR NEW CURB IS TO BE PLACED ADJACENT TO EXISTING PAVEMENT WITHOUT AN OVERLAY, A JOINT SHALL BE SAWS ON A LINE ESTABLISHED BY THE CITY ENGINEER TO ENSURE PAVEMENT REMOVAL TO A NEAT LINE. A NEAT EDGE WILL BE INCLUDED IN GRADING COMPLETE - LUMP SUM.
7. CLEARING AND GRUBBING ON THIS PROJECT IS LIMITED TO THE ACTUAL CONSTRUCTION LIMITS. NO CLEARING AND GRUBBING BEYOND CONSTRUCTION LIMITS UNLESS DIRECTED BY THE CITY ENGINEER. STRUCTURES, TREES, SHRUBS, AND OTHER LANDSCAPE PLANT MATERIAL THAT FALL WITHIN THE RIGHT-OF-WAY AND EASEMENT LIMITS, BUT OUTSIDE THE LIMITS OF CONSTRUCTION SHALL NOT BE DISTURBED.


LAYOUT NOTES:

- 1. ALL DIMENSIONS ARE PARALLEL OR PERPENDICULAR TO THE ELEMENTS FROM WHICH THEY ARE MEASURED, UNLESS OTHERWISE INDICATED ON DRAWINGS.
2. ANY DEVIATION FROM THESE DRAWINGS TO BE MADE IN THE FIELD DURING CONSTRUCTION SHALL BE APPROVED BY THE CITY ENGINEER PRIOR TO CONSTRUCTION AND THEN RECORDED ON 'AS BUILT' DRAWINGS.
3. REPORT ALL THE FIELD LAYOUT DISCREPANCIES IMMEDIATELY TO THE CITY ENGINEER. CONTRACTOR TO VERIFY THAT ALL DIMENSIONS WORK IN THE FIELD PRIOR TO CONSTRUCTION. CONTRACTOR TO STAKE IN CENTERLINE OF SIGNS, FENCING, AND WALLS TO BE APPROVED BY OWNER'S REPRESENTATIVE PRIOR TO CONSTRUCTION.

ATKINS logo and contact information: JOB NO. 100051166, DRAWN RTD, DESIGNED JDB, CHECKED JDB, QC.

Table with columns: DATE, REVISIONS. Includes a circular seal for the City of Sandy Springs, Georgia, dated 02-19-2018.

CITY OF SANDY SPRINGS PUBLIC WORKS logo and title: GENERAL NOTES, DUDLEY LANE SIDEWALK PROJECT (T.O. 16-024), DRAWING NO. 04-01.

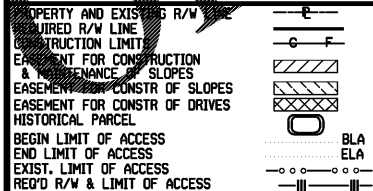

ATKINS logo and address: 1600 RIVEREDGE PARKWAY, NW SUITE 700 ATLANTA, GEORGIA 30328 770-933-0280

SANDY SPRINGS GEORGIA logo and name.

Task Order 16-024 - Dudley Lane Sidewalk Project (CAD) 04 GENERAL NOTES.dwg Feb 19, 2018 - 8:58am h04e741