

COUNTER SLOPE OF SURFACES ADJACENT TO CURB RAMPS
Fig. 406.2



PLAN
Ref. Figures 406.3 & 406.4

CURB RAMPS
Ref. Section 406

GENERAL SITE NOTES:
1. ACCESSIBLE PARKING SPACES AND ACCESS AISLE SHALL BE LEVEL, MAXIMUM PERMITTED SLOPE IS 1:48 (502.2 & 502.3)
2. ACCESSIBLE PARKING SPACES MUST BE IDENTIFIED WITH A SIGN. SIGNS IDENTIFYING VAN ACCESSIBLE SPACES SHALL CONTAIN THE DESIGNATION "VAN ACCESSIBLE". SIGNS SHALL BE MINIMUM 60" FROM THE PARKING SURFACE TO THE BOTTOM OF THE SIGN. (502.2.2 &502.2.3)

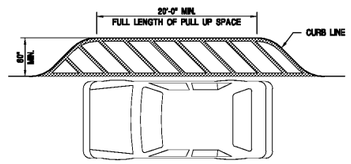

PASSENGER LOADING ZONE ACCESS AISLE
Fig. 503.3

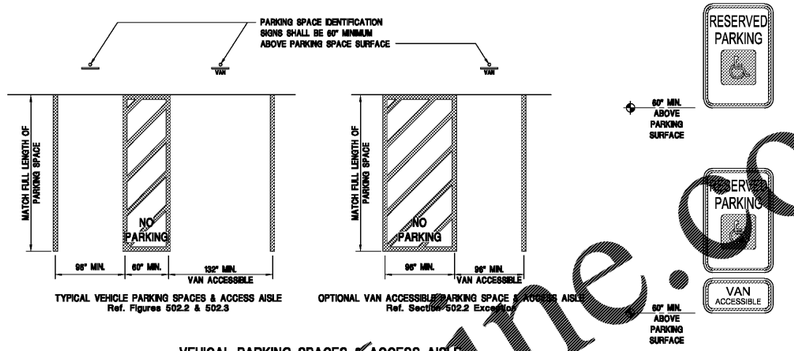

TYPICAL VEHICLE PARKING SPACES & ACCESS AISLE
Ref. Figures 502.2 & 502.3

OPTIONAL VAN ACCESSIBLE PARKING SPACE & ACCESS AISLE
Ref. Section 502.2 Exception

VEHICAL PARKING SPACES & ACCESS AISLE
Ref. Section 502

IDENTIFICATION
Ref. Section 502.6

PARKING & PASSENGER LOADING ZONES
Ref. Sections 502 & 503

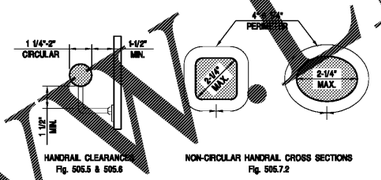

HANDRAIL CLEARANCE
Fig. 505.5 & 505.6

NON-CIRCULAR HANDRAIL CROSS SECTIONS
Fig. 505.7.2

HANDRAIL SIZES & CLEARANCES



STAIRS
Fig. 505.4 (a)

RAMPS
Fig. 505.4 (b)

WALKING SURFACES
Fig. 505.4 (c)

HANDRAIL HEIGHTS
Ref. Section 505

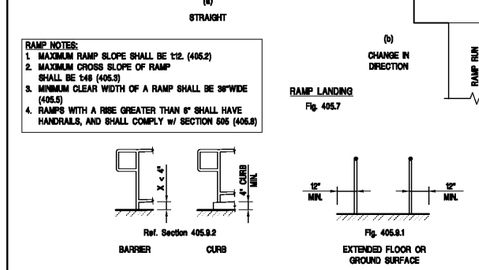

RAMP NOTES:
1. MAXIMUM RAMP SLOPE SHALL BE 1:12. (405.2)
2. MAXIMUM CROSS SLOPE OF RAMP SHALL BE 1:48 (405.3)
3. MINIMUM CLEAR WIDTH OF A RAMP SHALL BE 36"WIDE (405.5)
4. RAMPS WITH A RISE GREATER THAN 6" SHALL HAVE HANDRAILS, AND SHALL COMPLY w/ SECTION 505 (405.8)

RAMP LANDING
Fig. 405.7

Ref. Section 405.9.2
BARRIER

CURB

Fig. 405.9.1
EXTENDED FLOOR OR GROUND SURFACE

EDGE PROTECTION
Ref. Section 405.9

RAMPS
Ref. Section 405

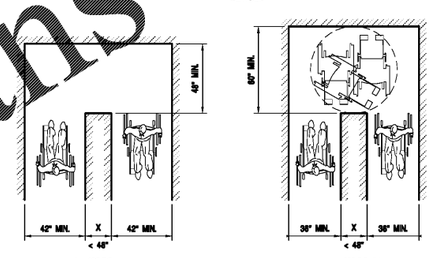

Fig. 403.5.2 (a)

Fig. 403.5.2 (b)

CLEAR WIDTHS AT 180 DEGREE TURNS



CLEAR WIDTHS
Fig. 403.5.1

ACCESSIBLE ROUTE NOTE:
THE SLOPE OF A WALKING SURFACE ALONG AN ACCESSIBLE ROUTE SHALL NOT BE STEEPER THAN 1:20 AND CROSS SLOPES SHALL NOT EXCEED 1:48 (402)

ACCESSIBLE ROUTE
Ref. Section 402

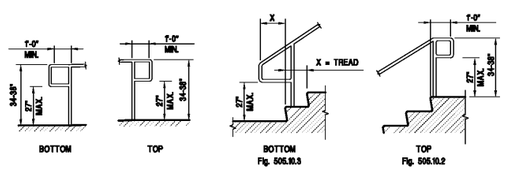

Fig. 505.10.3

Fig. 505.10.2

HANDRAIL EXTENSIONS @ RAMP
Fig. 505.10.1

HANDRAIL EXTENSIONS @ STAIR

NOTE:
MAXIMUM SLOPE OF A TREAD SURFACE SHALL BE 1:48 (504.4)

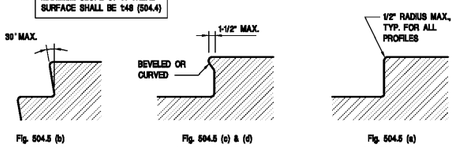

Fig. 504.5 (b)
ANGLED RISER

Fig. 504.5 (c) & (d)
NOSING PROJECTION

Fig. 504.5 (a)
NOSING EDGE

STAIRWAYS & HANDRAILS
Ref. Sections 504 & 505



Fig. 303.2
CHANGES IN LEVEL

Fig. 303.3

Fig. 302.2
CARPET PILE THICKNESS

NOTE:
CHANGES IN LEVEL GREATER THAN 1/2" SHALL BE RAMPED, AND SHALL COMPLY w/ SECTIONS 405 OR 406. (303.4)



OPENINGS IN FLOOR OR GROUND SURFACE
Ref. Section 302.3

FLOOR & GROUND SURFACES
Ref. Sections 302 & 303

FRED G. MARGULIES ARCHITECT
25001 Emery Road, Suite 400
Cleveland, Ohio 44128
216.232.3300 cryptcreative.com

Design and construction documents as instruments of service are given in confidence and remain the property of Fred G. Margulies, Architect. The use of this design and these construction documents for purposes other than the specific project named herein is strictly prohibited without expressed written consent of Fred G. Margulies, Architect.

LifeStance HEALTH

TENANT IMPROVEMENT
649 CHARITY COURT
FRANKFORT, KY 40601

Project No:	16632
Drawn By:	BCR
Date	Issue
08-29-18	Owner Review
09-05-18	Bid & Permit

A4.1

ACCESSIBILITY

Order Plans @ WWW.LDLine.com

XR-A4.1S Frankfort.dwg
XTG 1.5 Frankfort
Last Saved By: Brian Robinson 10/8/22 1:5 Frankfort KY-160 1.5 Frankfort A4.0-A4.1.dwg
Drawn By:Kelsey Nowak