


1736 EAST SUNSHINE ST. SUITE 417  
SPRINGFIELD, MO 65804  
APR 05 2018  
C2.2

PROVIDE CONTROL JOINTS AT 12'-0" O.C. (25% SLAB THICKNESS)




| TABLE 1**     |                                   |                                    |
|---------------|-----------------------------------|------------------------------------|
| PAVEMENT TYPE | STANDARD DUTY (CAR PARKING AREAS) | HEAVY DUTY (TRUCK AND DRIVE AREAS) |
| CONCRETE A'   | 5.0 INCHES                        | 6.0 INCHES                         |

\*\*PAVEMENT DESIGN IS BASED ON GEOTECHNICAL REPORT PROVIDED BY THE OWNER DATED 01/17/2018. ANDERSON ENGINEERING PROVIDES NO WARRANTY OR GUARANTEE FOR THIS DESIGN. CONTRACTOR IS RESPONSIBLE TO FULLY READ AND FOLLOW THE RECOMMENDATIONS OF THE PROJECT GEOTECHNICAL REPORT.

1 CONCRETE PAVING SECTION

C2.2 SCALE: 3/4" = 1'-0"

PROVIDE CONTROL JOINTS AT 10'-0" O.C. (25% SLAB THICKNESS)

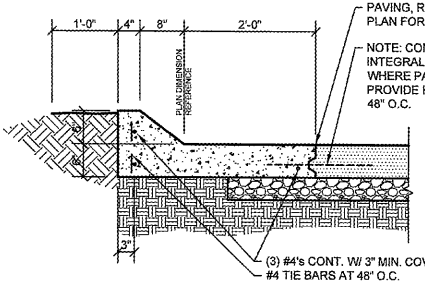


PAVING, REFER TO SITE DEVELOPMENT PLAN FOR LOCATION AND TYPE.  
NOTE: CONTRACTOR'S OPTION TO POUR INTEGRAL (MONOLITHIC) CURB AND PAVING. WHERE PAVING POURED SEPARATE, PROVIDE KEY-WAY OR #4 X 1'-0" DOWELS AT 48" O.C.  
(3) #4'S CONT. W/ 3" MIN. COVER #4 TIE BARS AT 48" O.C.

3 CONCRETE CURB SECTION

C2.2 SCALE: 3/4" = 1'-0"


NOTE: REFER TO SITE GRADING PLAN FOR ELEVATIONS OF PAVEMENT ADJACENT TO SIDEWALKS.

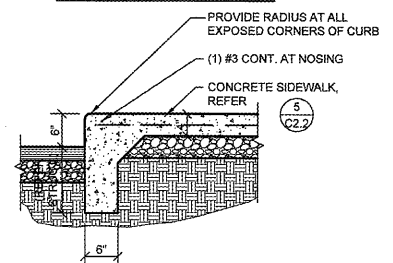

4 CONCRETE SIDEWALK CURB SECTION

C2.2 SCALE: 3/4" = 1'-0"


PROVIDE TOOLED CONTROL JOINTS AT 8' O.C. (25% SLAB THICKNESS) AND ISOLATION JOINTS AT 24' O.C., UNLESS OTHERWISE NOTED.



5 CONCRETE SIDEWALK SECTION


C2.2 SCALE: 3/4" = 1'-0"

NOTE: SYMBOL TO BE PAINTED (HIGHWAY GRADE) OR DECAL ADHERED TO PAVEMENT. COLOR TO MATCH STRIPING UNLESS OTHERWISE REQUIRED BY LOCAL ACCESSIBILITY STANDARDS.

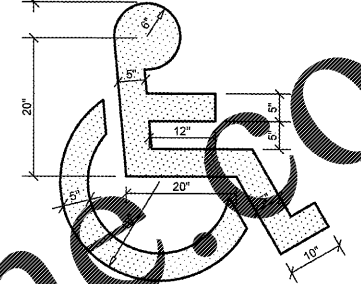


6 ACCESSIBLE PARKING PAVEMENT STRIPING DETAIL

C2.2 SCALE: 3/4" = 1'-0"

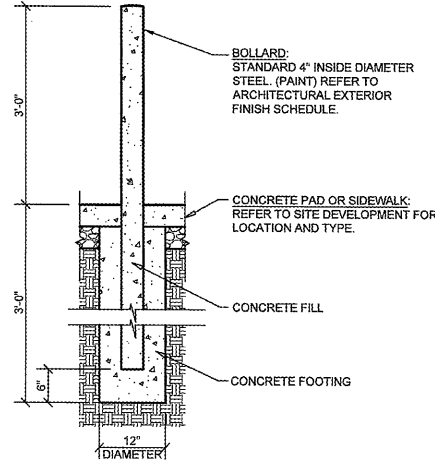

7 STEEL BOLLARD SECTION


C2.2 SCALE: 3/4" = 1'-0"

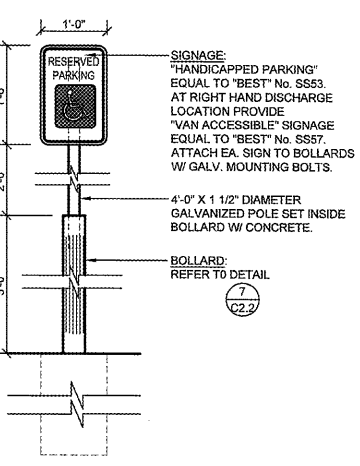

8 HANDICAP PARKING SIGN DETAIL


C2.2 SCALE: 3/4" = 1'-0"

PROVIDE DETECTABLE WARNINGS WITH RAISED PATTERN (CAUTION YELLOW COLOR WITH .9" DIA. AND RAISE .02" PER ADAAG 4.7.7)

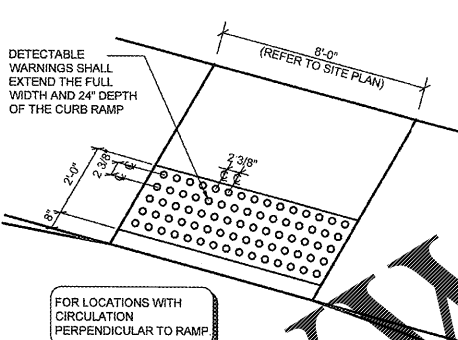

9 DETECTABLE WARNING DETAIL

C2.2 SCALE: (NOT TO SCALE)



10 ASPHALT PAVING SECTION

C2.2 SCALE: 3/4" = 1'-0"

| TABLE 1**             |   |   |
|-----------------------|---|---|
| PAVEMENT TYPE         | FLEXIBLE PAVEMENT SECTION   |   |
|                       | STANDARD DUTY (CAR PARKING AREAS)   | HEAVY DUTY (TRUCK AND DRIVE AREAS)  |
| ASPHALTIC CONCRETE A' | 3.0 INCHES (1.25-INCH LAYER OF CONCRETE SURFACE COURSE, 1.75-INCH LAYER OF CONCRETE BINDER) | 3.5 INCHES (1.5-INCH LAYER OF CONCRETE SURFACE COURSE, 2.0-INCH LAYER OF CONCRETE BINDER) |

\*\*PAVEMENT DESIGN IS BASED ON GEOTECHNICAL REPORT PROVIDED BY THE OWNER DATED 01/17/2018. ANDERSON ENGINEERING PROVIDES NO WARRANTY OR GUARANTEE FOR THIS DESIGN. CONTRACTOR IS RESPONSIBLE TO FULLY READ AND FOLLOW THE RECOMMENDATIONS OF THE PROJECT GEOTECHNICAL REPORT.

Order Plans @



CRAIG A. SCHNEIDER, AIA  
ARCHITECT

417.862.9525  
417.862.3265  
e-mail: architect@estertyschneider.com

PROJECT:  
NEW O'REILLY AUTO PARTS STORE  
HWY 67  
PRICEVILLE, AL  
SITE DEVELOPMENT DETAILS

O'Reilly AUTO PARTS  
CORPORATE OFFICES  
233 SOUTH PATTERSON  
SPRINGFIELD, MISSOURI 65802  
(417) 862-2674 TELEPHONE

COMM # 4160  
DATE: 04-06-18  
REVISION DATE: