

▲ Lutron cable GRX-CBL-46L (5 Conductor Non-Plenum) or GRX-PCBL-46L (5 Conductor Plenum rated). Otherwise 2 #12AWG (2.5mm²), 1 Belden #9461, and 1 green pair, odd 1 #18AWG (1.0mm²) for emergency sensing

Button 1 - SIGNS
Button 2 - BUILDING
Button 3 - PARKING
Button 4 - SECURITY

MOUNT PHOTOCELL ON ROOF HORIZONTAL FACING NORTH SHIELDED FROM ANY DIRECT LIGHT SOURCE





ELECTRICAL CONTRACTOR TO PROVIDE LOW-VOLTAGE CABLE

3 #18 AWG

GES Series Photo sensor

SO-4BI-WH-EGN
ADDRESS: 1
INSTALL NEXT TO DIMMER PANEL
FUNCTION:4 BUTTON CONTROL

Two-Gang Wall Box to be mounted on wall adjacent to Lutron Dimmer Panel at 60" unless otherwise noted on plans

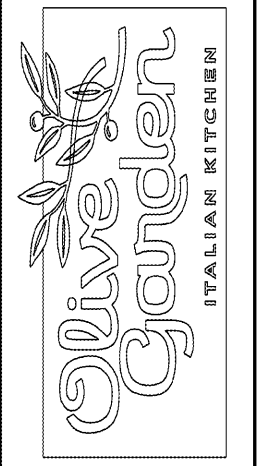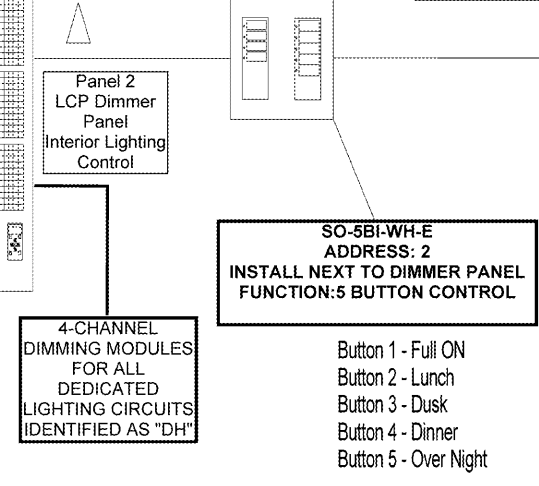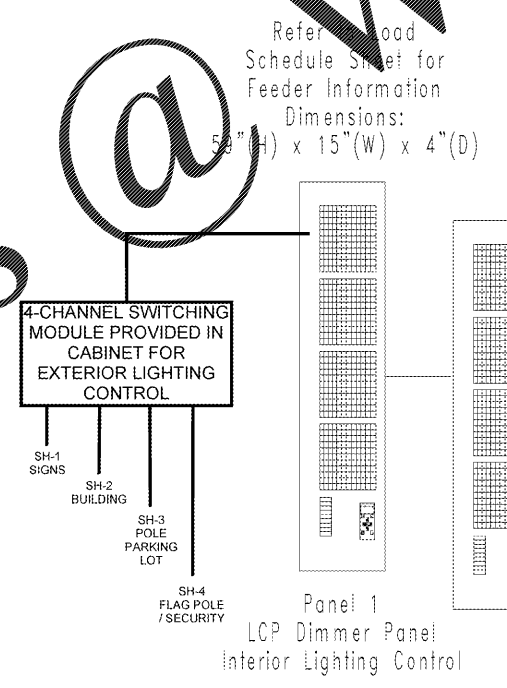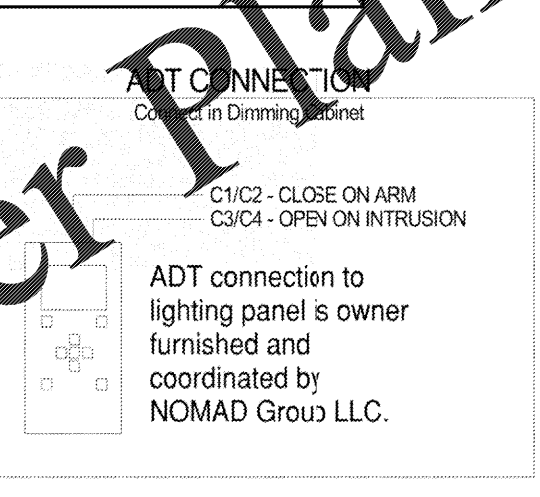

Order Plans @