


△ Lutron cable GRX-CBL-46L (5 Conductor Non-Plenum) or GRX-PCBL-46L (5 Conductor Plenum rated). Otherwise 2 #12AWG (2.5mm²), 1 Belden #9461, and 1 Belden #9462, add 1 #18AWG (1.0mm²) for emergency sensing

- Button 1 - SIGNS
- Button 2 - BUILDING
- Button 3 - PARKING
- Button 4 - SECURITY

MOUNT PHOTOCELL ON ROOF HORIZONTAL FACING NORTH SHIELDED FROM ANY DIRECT LIGHT SOURCE

ELECTRICAL CONTRACTOR TO PROVIDE LOW-VOLTAGE CABLE



SO-4BI-WH-EGN ADDRESS: 1 INSTALL NEXT TO DIMMER PANEL FUNCTION: 4 BUTTON CONTROL

Mounted in a Two-Gang Box


Two-Gang Wall Box to be mounted on wall adjacent to Lutron Dimmer Panel at 60" unless otherwise noted on plans

4-CHANNEL DIMMING MODULES FOR ALL DEDICATED LIGHTING CIRCUITS IDENTIFIED AS "DH"

SO-5BI-WH-E ADDRESS: 2 INSTALL NEXT TO DIMMER PANEL FUNCTION: 5 BUTTON CONTROL



- Button 1 - Full ON
- Button 2 - Lunch
- Button 3 - Dusk
- Button 4 - Dinner
- Button 5 - Over Night

Refer to Load Schedule Sheet for Feeder Information Dimensions: 9" (H) x 15" (W) x 4" (D)



Panel 1 LCP Dimmer Panel Interior Lighting Control

Panel 2 LCP Dimmer Panel Interior Lighting Control

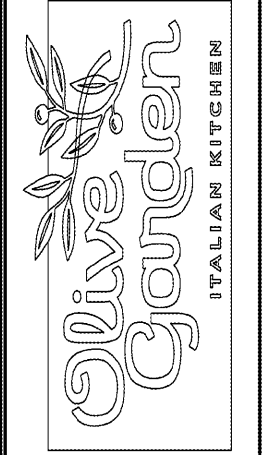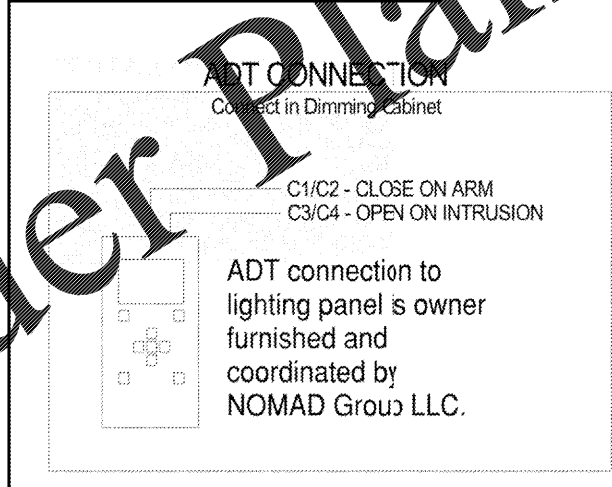

Order Plans