DESIGN No. U305

1 HOUR INTERIOR BEARING WALL

UL DRUNE CERTIFICATIONS DIRECTORY

Design No. U305
BXUV.U305
Fire Resistance Ratings - ANSI/UL 263

Print Button

Design/System/Construction/Assembly Usage Disclaimer

- Authorities Having Jurisdiction should be consulted on all issues as to the particular requirements governing the installation and use of UL Listed or Classified products, equipment, systems, designs, and services.
- Authorities Having Jurisdiction should be consulted before each installation.
- Fire resistance assemblies and products are developed by the design submitter and have been investigated by UL for compliance with applicable requirements. The published information is limited unless otherwise noted. Users should obtain complete details.
- Where field issues arise, it is recommended that the Firm consult with or request the technical service staff provided by the product manufacturer noted for the design. Users of fire resistance assemblies are advised to consult the general Guide Information for each product category and each group of assemblies. The Guide Information includes specific concerning alternate materials and alternate methods of construction.
- Only products which bear UL's Mark are considered as Classified, Listed, or Recognized.

Fire Resistance Ratings - ANSI/UL 263

See General Information for Fire Resistance Ratings - ANSI/UL 263

Design No. U305

December 14, 2012

Bearing Wall Rating — 1 HR.

Finish Rating — See Items 2, 3A, 3G, 3H, 3K, 3M, 3N, 3O and 3L.

STC Rating: 34 (See Item 3)

Load Restricted for Canadian Applications — See Guide 4U1N7

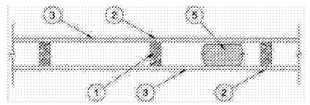

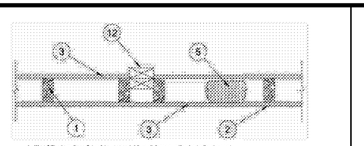

1. **Wood Studs** — Nom 2 by 4 in. spaced 16 in. OC max, effectively doublegged.

2. **Joists and Nailboards** — Joists oriented with face surfaces and paper tape, joist non-bound and paper tape may be omitted where adjacent boards are used. Type 4d cement coated nails, 1-1/2 in. long, 0.0915 in. shank diam and 1/4 in. diam heads. When used in wall, nails spaced 7 in. OC with an outward speed max 1-1/8 in. long, 0.0915 in. shank diam and 1/4 in. diam heads.

3. **Gypsum Board*** — 1/2 in. thick gypsum board, applied horizontally or vertically. Gypsum boards applied in two layers with joints staggered on opposite sides of studs. Screws spaced a maximum 8 in. OC in the two layers with the screws in the second layer driven into the studs. When used in walls, screws spaced a maximum 12 in. OC. Gypsum boards applied with long dimension parallel to studs. Joints of base layer not required to be fastened to studs. Joints of face layer fastened to studs. Face layer applied with joints offset 24 in. from joints of base layer. Joints of face layer staggered with joints of base layers. Screws for attaching face layer spaced a maximum 12 in. OC. Gypsum boards applied with long dimension parallel to studs. Joints of face layer offset 24 in. from joints of base layer. Joints of face layer staggered with joints of base layers. Screws for attaching face layer spaced a maximum 12 in. OC. Gypsum boards applied with long dimension parallel to studs. Joints of face layer offset 24 in. from joints of base layer. Joints of face layer staggered with joints of base layers. Screws for attaching face layer spaced a maximum 12 in. OC. When used in walls, screws