


GENERAL NOTES:

- ALL DIMENSIONS ARE TO FACE OF STUD UNLESS OTHERWISE NOTED.
- ALL SHORING AND BRACING AT SCOPE OF DEMOLITION IS TO BE THE RESPONSIBILITY OF THE G.C.
- IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROTECT ALL IN-PLACE STRUCTURAL ELEMENTS FROM DAMAGE DURING DEMOLITION.
- COORDINATE ROOF PENETRATIONS AND STRUCTURAL BRACING FOR NEW ROOFTOP EQUIPMENT WITH EQUIPMENT SUPPLIER.
- G.C. IS TO FIELD VERIFY ALL EXISTING CONDITIONS AND COORDINATE DEMOLITION SCOPE WITH ALDI REP. AT BID WALK-THROUGH. SOME ITEMS SHOWN TO BE REMOVED MAY NEED TO BE REUSED OR SALVAGED. G.C. TO VERIFY WITH ALDI REP.
- PROVIDE TEMPORARY WEATHER PROTECTION DURING DEMOLITION TO PROTECT WORK EXPOSED TO THE EXTERIOR.
- EXISTING TILE TO REMAIN IN SALES AREA. G.C. TO PATCH AND REPAIR AS NEEDED.
- EXISTING FREEZER SLAB TO BE REMOVED AND REPLACED WITH NEW. SEE STRUCTURAL DRAWINGS.
- EXISTING BACKROOM CONCRETE SLAB TO REMAIN. U.N.O. SAWCUT AND REMOVE EXISTING CONCRETE SLAB AS NECESSARY TO COMPLETE NEW WORK AS SHOWN. FILL VOID W/ NEW CONCRETE TO BE FLUSH WITH EXISTING. SEE STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
- SALES FLOOR SUSPENDED CEILING GRID, CEILING TILES, DRYWALL CEILING, DUCTS, DIFFUSERS, SECURITY LIGHTS, LIGHT FIXTURES, AND HANGING SIGNS TO BE REMOVED. ALL RELATED ABANDONED CONDUITS, WIRING, AND GAS LINES ARE TO BE REMOVED BACK TO AN APPROPRIATE POINT TO BEGIN NEW WORK.
- EXISTING RESTROOMS, OFFICE, UTILITY, HALLWAY, AND BREAK ROOM TO REMAIN. THE EXISTING LIGHT FIXTURES TO BE REPLACED WITH NEW.
- EXISTING LIGHT FIXTURES AND EMERGENCY LIGHTS IN BACKROOM TO BE REPLACED WITH NEW.
- REPLACE ALL EXTERIOR WALL PACKS AND LIGHTS.
- SPRINKLER HEADS IN SALES FLOOR TO BE TURNED UP. BACKROOM SPRINKLERS WILL BE MODIFIED FOR NEW COOLER/FREEZER FOOTPRINTS AND ADDITION. EXISTING FIRE PROTECTION SYSTEM TO BE MAINTAINED THROUGH OUT CONSTRUCTION.
- EXISTING STOREFRONT TO BE REMOVED AND REPLACED WITH NEW AT AUTO DOORS, STOREFRONT WINDOWS, AND VESTIBULE.
- EXISTING INTERIOR WALLS TO BE REMOVED AS NEEDED TO FACILITATE NEW CONSTRUCTION. EXISTING FLOOR TO BE PATCHED AND REPAIRED WHERE WALLS ARE REMOVED. REFER TO SHEET A101 FOR NEW WALL LAYOUT.
- EXISTING PALLET BUMPER TO BE REMOVED AS NEEDED TO FACILITATE NEW CONSTRUCTION. ABANDONED EQUIPMENT PADS TO BE REMOVED AND RETURNED TO USEABLE SPACE.
- EXISTING FIRE EXTINGUISHERS TO REMAIN.
- REMOVE ALL McCUE BUMPER CORNERS AND COVERS. PATCH AND REPAIR FLOOR TO MATCH EXISTING.
- REMOVE EXISTING WALL PANELING AND COVE MOLDING THROUGHOUT SALES. EXISTING GYPSUM BOARD TO REMAIN. TYP. PATCH AND REPAIR AS NEEDED.
- EXISTING ROOF EDGE METAL TO BE REMOVED AND REPLACED WITH NEW.
- EXISTING ROOF MEMBRANE TO BE REMOVED AND REPLACED WITH NEW.
- REPLACE EXISTING BREAKROOM & OFFICE BUZZER W/ CHIME

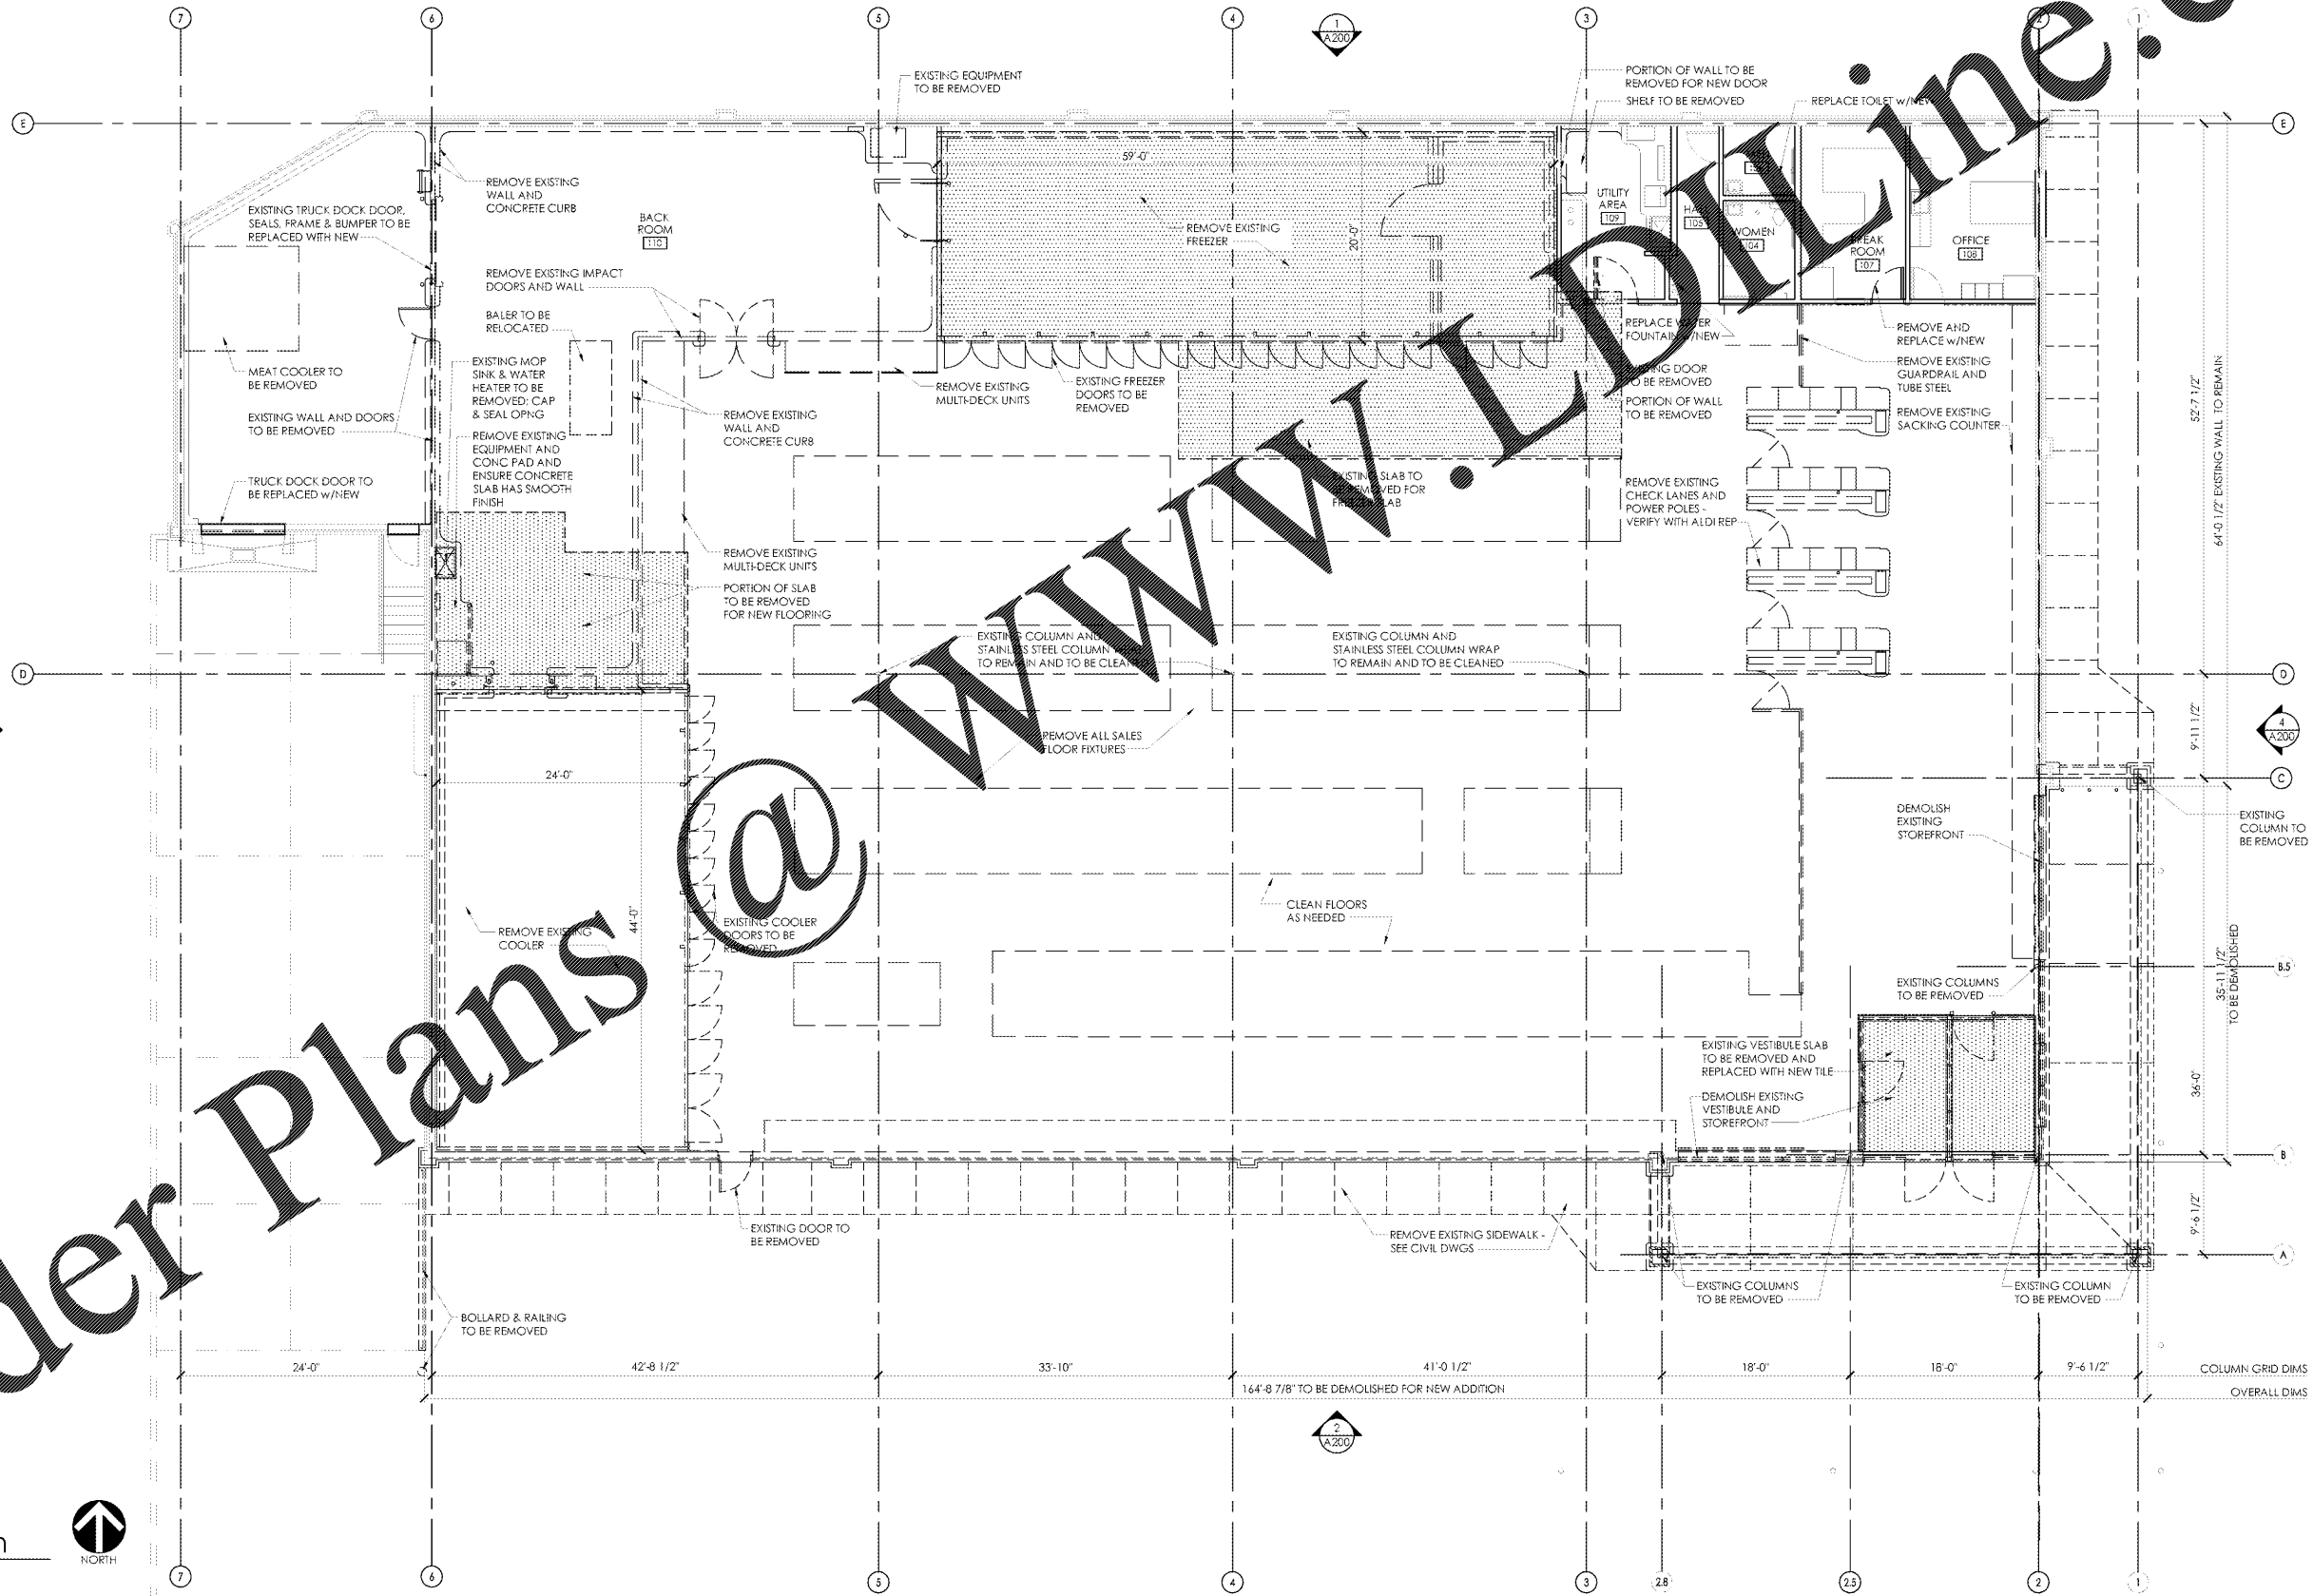


Order Plans

WWW.LDOnline.com



American Institute of Architects
 310 MILLS AVE., GREENVILLE, SC 29605
 864.242.9881
 plans@narramore.net
 © 2018 NARRAMORE ASSOCIATES, INC.
 COPYRIGHT PROTECTED BY FEDERAL LAW



1597 DRY POND RD.
 JEFFERSON, GA 30549
 706.387.7722
 FAX: 706.387.7701

ALDI FOOD STORE # 61
 2589 Spring Road
 Smyrna, GA 30080

REVISIONS	

PROJECT DATA
 V1.07 100x155 LW Expansion

PROJECT NUMBER
 18412

ISSUE DATE
 10-25-18

ALDI FOOD STORE #61
 Smyrna, GA

A-100

DEMOLITION PLAN

1 Demolition Plan
 SCALE: 1/8" = 1'-0"

