




BI-PART WITH OPTIONAL TRANSOM	
PROJECT INFORMATION	
PROJECT NAME: ALDI PROTOTYPE V8.0	
LOCATION: VARIOUS (NON-HURRICANE)	
DOOR NUMBER(S): TYPICAL EXTERIOR	
DATE: 12/14/2017	SHEET: 1 OF 1

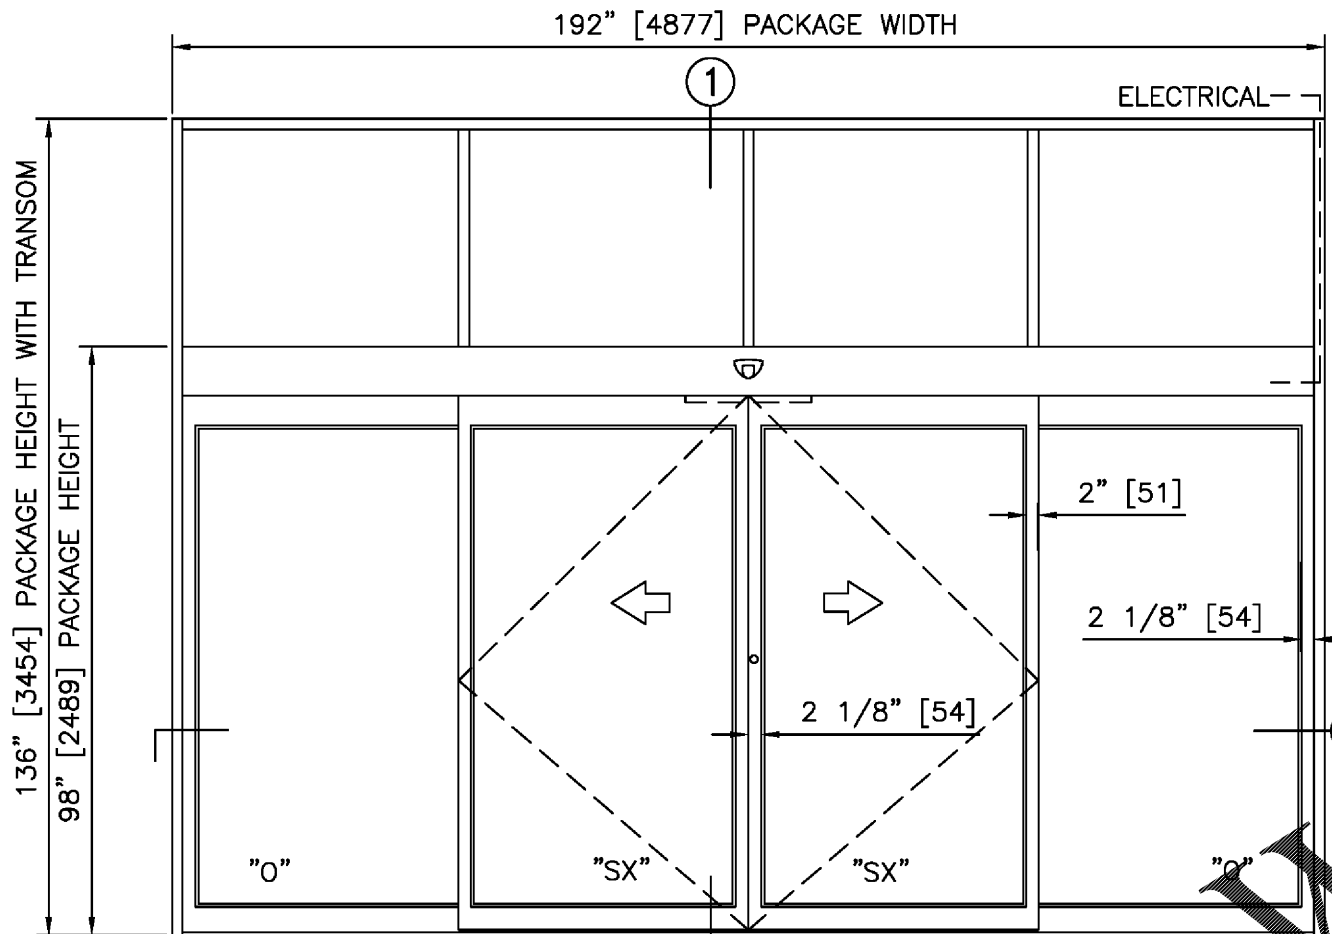


**ELEVATION VIEW**  
SCALE: 3/8" = 1'-0"

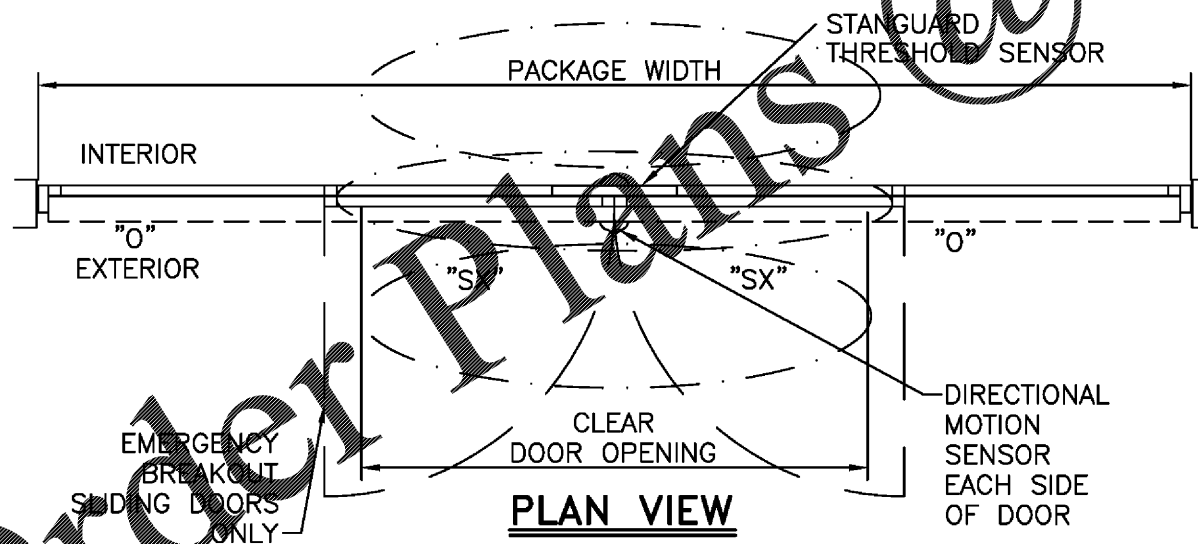

**PLAN VIEW**  
SCALE: 3/8" = 1'-0"

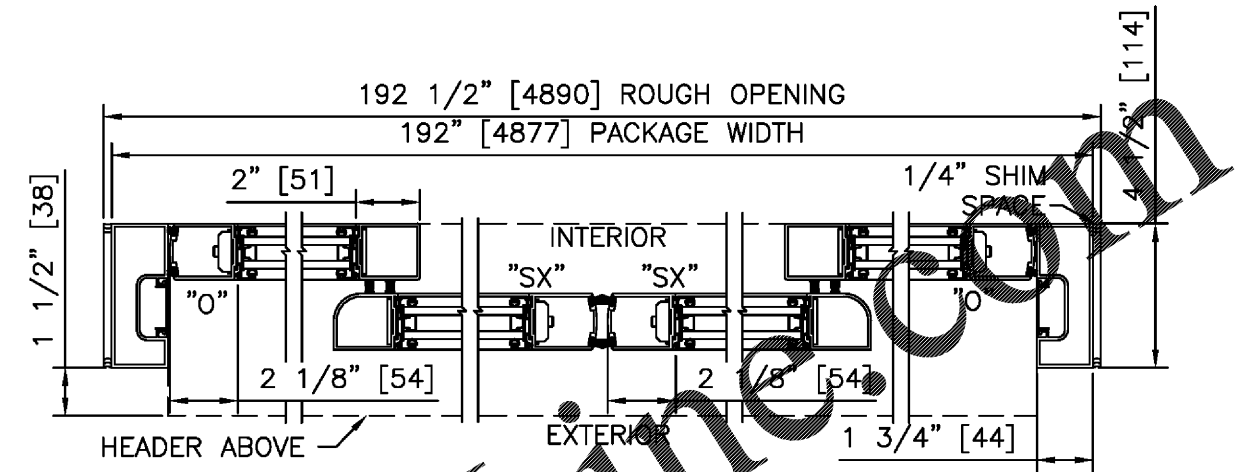

**HORIZONTAL SECTION**  
SCALE: 1/2" = 1'-0"

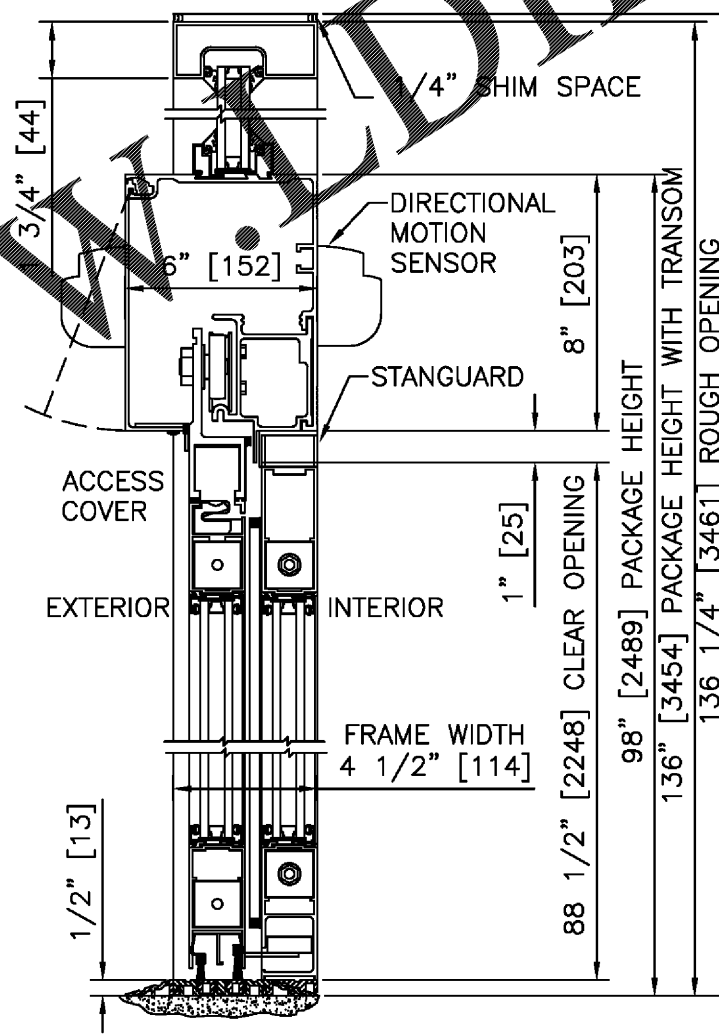

**VERTICAL SECTION**  
SCALE: 2" = 1'-0"

**PRODUCT OPTIONS**

- TRANSOM
  - YES
  - VERTICALS 1 2 3
- FINISH
  - ANODIZED CLEAR CL2
  - ANODIZED DK BRONZE
  - CUSTOM
- LOCKING
  - 2-POINT
  - ACCESS CONTROL (PANIC)
  - 3-POINT
- STILES
  - NARROW
  - MEDIUM
- BOTTOM RAILS
  - STANDARD 4"
  - OPTIONAL 6" 8" 10" 12"
- THRESHOLDS
  - SQ/BVL (EXT)
  - DBL BVL
  - SQ/BVL (INT)
  - RECESSED
- ACTIVATION/SAFETY
  - 2 SU-100/STANGUARD
  - 2 COMBINED ACTIVATION/SAFETY SENSORS
- OTHER OPTIONS
  - ROTARY CTRL SWITCH
  - UNINTERRUPTIBLE POWER SUPPLY
  - FLY OPEN BOX
  - WIND DAMPERS
  - ALARM CONTACTS
  - KEYED

BI-PART FORMULAS - NARROW STYLE  
 PACKAGE WIDTH = 2 X CLEAR DOOR OPENING + 23.4"  
 CLEAR DOOR OPENING = 1/2 PACKAGE WIDTH - 11.7"  
 EMERGENCY BREAKOUT WIDTH = CLEAR DOOR OPENING + 7.3"  
 DOOR PANEL WIDTH = 1/4 PACKAGE WIDTH + 0.3"

TYPICAL PACKAGE DIMENSIONS (NARROW STYLE)			
PACKAGE WIDTH	NOMINAL CLEAR DOOR OPENING	DOOR PANEL NOMINAL WIDTH	EMERGENCY BREAKOUT NOM. WIDTH
192"	84.3"	48.3"	91.6"

BI-PART WITH OPTIONAL TRANSOM

**DURA-GLIDE**  
**2000**  
**SERIES**

**STANLEY**  
Security  
ACCESS TECHNOLOGIES

- NOTE:
- ELECTRICAL REQUIREMENTS: 120 VAC, 5 AMP MIN TO POWER OPERATOR BY ELECTRICAL CONTRACTOR.
  - ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
  - LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
  - STANDARD GLAZING STOPS FOR SLIDING AND FIXED PANELS ARE 1"[25].
  - SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.