



Order Plans

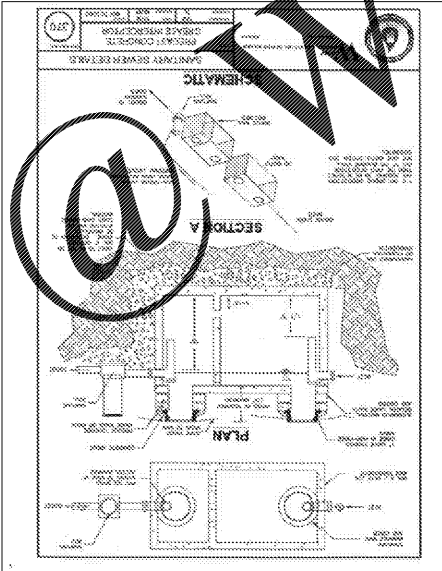
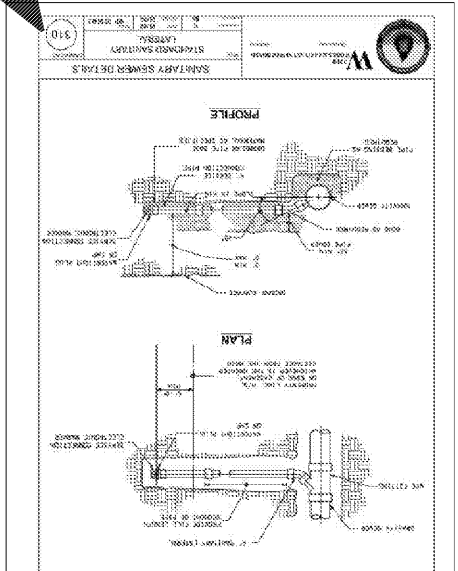
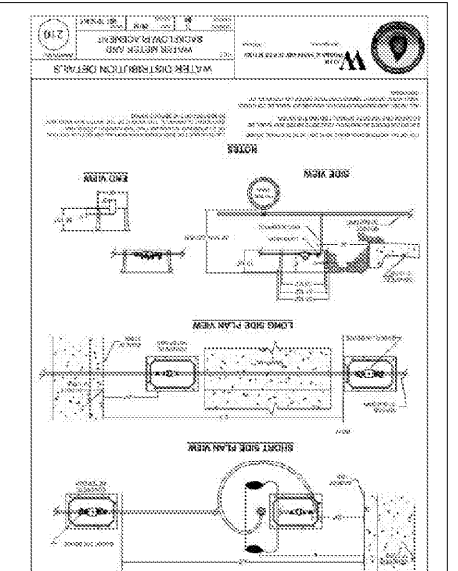
WWW.TDLINE.COM

PRELIMINARY - NOT FOR CONSTRUCTION

**PROPOSED BK & POPEYES FOR
PREMIER KINGS COMPANIES**
SHORTER, ALABAMA

ROBERT A. WHITE
ENGINEERING, L.L.C.
12105 204th AVE. NORTONSVILLE, AL 36203
PO BOX 204048, MONTICELLO, AL 36103
TEL: 205-355-3000 FAX: 205-355-2279

8.1
SHEET NUMBER

DETAILS
SHEET TITLE

REV'S
DATE
CHECKED BY
DESIGNED BY

PROJ #
SHEET NUMBER
DATE
CHECKED BY
DESIGNED BY

Engineering, L.L.C.
12105 204th AVE. NORTONSVILLE, AL 36203
PO BOX 204048, MONTICELLO, AL 36103
TEL: 205-355-3000 FAX: 205-355-2279

Asphalt Pavement

The following asphalt buildup is recommended for all paved areas:

- 1" ALDOT Section 429.4, Max 1 Weaving Surface
- 3.5" ALDOT Section 429.4, Max 1 Intermediate Base
- 8" ALDOT Section 429.4, Max 1 Base
- 8" ALDOT Section 230 Reinforced Flexion Base
- of the material's Standard Proctor Density (ASTM E-155) at 4.2% of the optimum moisture content.

Concrete - 4" concrete at 28 days curing period included in 10% of the concrete's Standard Proctor Density (ASTM E-155) at 4.2% of the optimum moisture content.

Concrete - 4" concrete at 28 days curing period included in 10% of the concrete's Standard Proctor Density (ASTM E-155) at 4.2% of the optimum moisture content.

This concrete is recommended for all curbs, sidewalks, loading and unloading areas, and other paved areas.

Concrete - 4" concrete at 28 days curing period included in 10% of the concrete's Standard Proctor Density (ASTM E-155) at 4.2% of the optimum moisture content.

ALDOT Section 230 Reinforced Flexion Base (ASTM E-155) at 4.2% of the material's Standard Proctor Density (ASTM E-155) at 4.2% of the optimum moisture content.

Asphalt Pavement