

ABBREVIATIONS:


@	At	JAN.	Janitor
A.B.	Anchor Bolt	J.B.	Joist Bearing
A.C.	Air Conditioner	JST.	Joist
ACOUST.	Acoustical		
ALUM.	Aluminum		
ARCH.	Architectural		
A.T.	Acoustical Tile		
B.C.	Bottom of Curb	LAV.	Lavatory
BLK.	Block	LLV.	Long Leg Vertical
BOTT.	Bottom		
CER.	Ceramic	MAS., MSRY	Masonry
CHM.	Custom Hollow Metal	MCS	Modular Cabinet System
C.I.	Curb Inlet	MECH.	Mechanical
	Centerline	MIN.	Minimum
CLO.	Closet	N	North
CMU.	Concrete Masonry Unit	NA	Not Applicable
C.O.	Clean Out	N.I.C.	Not in Contract
COL.	Column	NTS	Not to Scale
CONC.	Concrete	O.C.	On Center
CONST.	Construction	OPP.	Opposite
CONT.	Continuous		
C.T.	Ceramic Tile	PL	Plate
CHR.	Coat & Hat Rack	PT	Pressure Treated
C.J.	Control Joint	PEJ	Premixed Expansion
D. DIAM.	Diameter	PLAST	Plaster
DF	Drink Fountain	PSF	Pounds Per Square Foot
DI	Drain Inlet	PSI	Pounds Per Square Inch
DN	Down		
DRIV.	Driver	R	Radius
DS	Downspout	REF	Refrigerator
DWGS.	Drawings	RE'Q'D	Required
DWLS	Dowels	RL	Roof Level
DR	Drawer	RM	Room
E.J., EXP. JT.	Expansion Joint	RT	Resilient Tile
EL., ELEV	Elevation	RW	Regular Weight Round
EQ	Equal		
EQUIP.	Equipment	SQ.	Square
E.F.I.S.	Exterior Finish Insulation System	SIM	Similar
F.E.	Fire Extinguisher	SLV	Short Leg Vertical
F.H.	Fire Hose	S.M.	Sheet Metal
FES	Fire Extinguisher Sign	STL	Steel
FIN.	Finish	STO., STOR	Storage
FLEX	Flexible	STRUCT.	Structural
FLR.	Floor	SH	Shelves
FT.	Foot	TC	Teacher Cabinet
FTG.	Footing	T.C.	Top of Curb
GA	Gauge	TD	Turn Down
G.C.	General Contractor	TFF	Top of Finished Floor
GYP. BRD.	Gypsum Wallboard	TFS	Top of Finished Slab
H	Height	T & G	Tongue and Groove
HC	Handicapped	T.M.	Transitional Material
HCM	Hollow Concrete Masonry	TP	Top of Pavement
HORIZ.	Horizontal	T/S	Top of Steel
HW	Hand Wash	TYP.	Typical
I.D.	Inside Diameter	U.N.O.	Unless Noted Otherwise
IND.	Industrial	V.C.J.	Veneer Control Joint
INV.	Invert	VERT.	Vertical
		VRS	Varies
		VWC	Vinyl Wall Covering
		W	Width
		W/	With
		W.C.	Water Cooler
		WD	Wood
		WWF	Welded Wire Fabric

CONSTRUCTION MATERIALS:

PLAN / SECTION

	face brick
	hollow concrete masonry
	gypsum wallboard
	ceramic/quarry tile
	acoustical tile
	resilient flooring
	carpet
	steel/iron
	aluminum
	small scale metal
	rough lumber
	medium scale lumber
	small scale lumber
	large scale plywood
	small scale plywood
	ball blanket
	insulation
	laminated plastic

INDEX OF SYMBOLS:

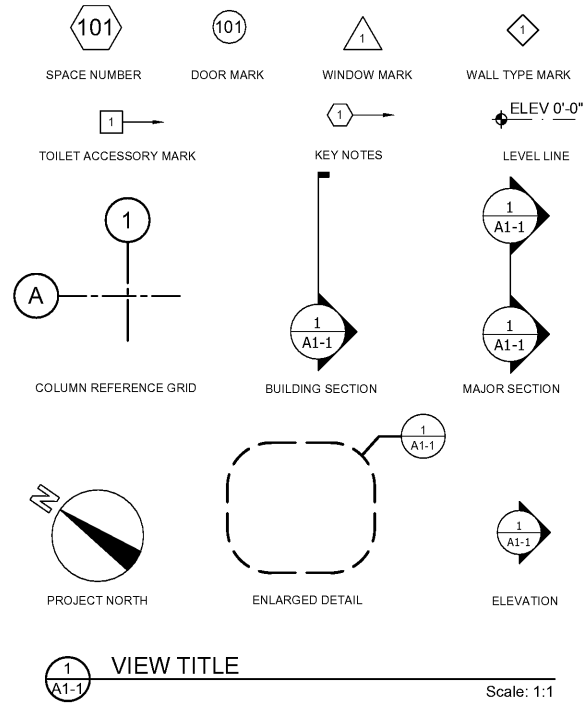

INDEX CONTINUED

ARCHITECTURAL	
A9-1	DETAILS
A9-2	DETAILS
A9-3	DETAILS
A9-4	DETAILS
A9-5	DETAILS
A9-6	DETAILS
RC-1	REFLECTED CEILING PLAN
RC-2	REFLECTED CEILING PLAN
RC-3	DETAILS
AS-1	ARCHITECTURAL STRUCTURAL DETAILS
AS-2	ARCHITECTURAL STRUCTURAL DETAILS
AS-3	ARCHITECTURAL STRUCTURAL DETAILS
AS-4	ARCHITECTURAL STRUCTURAL DETAILS
AS-5	ARCHITECTURAL STRUCTURAL DETAILS
AS-6	ARCHITECTURAL STRUCTURAL DETAILS
AS-7	ARCHITECTURAL STRUCTURAL DETAILS

INDEX OF SHEETS

GENERAL	
G-1	COVER SHEET
G-2	INDEX OF SHEETS
G-3	CODE REVIEW
SITE DEVELOPMENT	
SD-1	SITE PLAN - OVERALL
SD-2	SITE PLAN - PROPOSED
SD-3	SITE DETAILS
SD-4	SITE DETAILS
ARCHITECTURAL	
A1-1	FIRST FLOOR PLAN
A1-2	SECOND FLOOR PLAN
A1-3	FIRST FLOOR DIMENSION PLAN
A1-4	SECOND FLOOR DIMENSION PLAN
A1-5	DEDUCTIVE ALTERNATE ENTRY PLAN
A2-1	DOOR / FRAME SCHEDULE
A2-2	EXTERIOR FINISH SCHEDULE
A2-3	DOOR / WINDOW TYPES
A2-4	WINDOW TYPES
A2-5	WALL TYPES
A2-6	DETAILS
A2-7	FRAME DETAILS
A2-8	HEAD, JAMB, SILL DETAILS
A2-9	HEAD, JAMB, SILL DETAILS
A3-1	EXTERIOR ELEVATIONS - BASE BID
A3-2	EXTERIOR ELEVATIONS - BASE BID
A3-3	EXTERIOR ELEVATIONS - BASE BID
A3-4	EXTERIOR ELEVATIONS - BASE BID
A3-5	ADD. ALT. NO. 1 ELEVATIONS
A3-6	ADD. ALT. NO. 1 ELEVATIONS
A3-7	ADD. ALT. NO. 1 ELEVATIONS
A3-8	ADD. ALT. NO. 1 ELEVATIONS
A3-9	ADD. ALT. NO. 2 ELEVATIONS
A3-10	ADD. ALT. NO. 2 ELEVATIONS
A3-11	ADD. ALT. NO. 2 ELEVATIONS
A3-12	ADD. ALT. NO. 2 ELEVATIONS
A4-1	BUILDING SECTION
A4-2	STAIR DETAILS
A4-3	STAIR SECTIONS
A4-4	BUILDING SECTION
A4-5	STAIR SECTIONS
A5-1	WALL SECTION
A5-2	WALL SECTION
A5-3	DETAILS
A5-4	WALL SECTION
A5-5	WALL SECTION
A5-6	WALL SECTION
A5-7	ENTRY PLAN
A5-8	ENTRY PLAN
A5-9	WALL DETAILS
A5-10	ENTRY DETAILS
A5-11	DETAILS
A5-12	DETAILS
A5-13	CANOPY DETAILS
A5-14	CANOPY DETAILS
A6-1	ROOF PLAN
A6-2	ROOF DETAILS
A6-3	ROOF DETAILS
A7-1	TOILET DETAILS
A7-2	TOILET PLANS / DETAILS
A7-3	TOILET PLANS / DETAILS
A8-0	FIRST FLOOR INTERIORS INDEX PLAN
A8-1	SECOND FLOOR INTERIORS INDEX PLAN
A8-2	CABINETRY DETAILS
A8-3	INTERIOR ELEVATIONS



SMITH DESIGN GROUP, INC.
 20 WEST HUNTERSON STREET
 LAGRANGE, GEORGIA 30240
 770-882-5511 www.SDGarch.net

Deductive Alternatives:

Deduct. Alt. No. 1: To Remove 2-story entry tower and associated wing wall from the Base Bid as detailed on the drawings.

Additive Alternatives:

Add. Alt. No. 1: To provide metal studs and sheathing on three exterior walls and add cast stone in areas designated on the drawings. See exterior elevations and wall types 1 and 3. Areas shown to receive metal & siding will also have metal studs and sheathing as designated on wall types 1 and 3. [Note: The back wall will remain metal siding on PEMB wall girts.]

Add. Alt. No. 2: To provide metal studs and sheathing on three exterior walls and add cast stone and brick in areas designated on the drawings. See exterior elevations and wall types 1 and 3. [Note: The back wall will remain metal siding on PEMB wall girts.]

Add. Alt. No. 3: To provide and install fire truck exhaust system for two fire trucks. See drawings for details.

Add. Alt. No. 4: In lieu of Amtico luxury vinyl tile (LVT) flooring and Resilient Base, provide porcelain tile flooring and 4" high porcelain tile base in spaces designated on the drawings.

Add. Alt. No. 5: In lieu of 6" rolled vinyl insulation on the roof and exterior walls, provide and install 5-1/2" of spray-on polyisocyanurate insulation (or equal) to the Base Bid.

Add. Alt. No. 6: In lieu of pre-molded acrylic showers in spaces 108, 202, 210, 211 & 215, provide tile board, shower liners & porcelain tile (thin set) on floors, walls, and ceilings of the showers. (Furr down sloped ceiling to 7'-0" AFF.)

Add. Alt. No. 7: Provide and install irrigation system on a separate meter for the entire site. [Note: drip system in bed areas is acceptable.]

Add. Alt. No. 8: Provide and install landscaping as designed and specified on the drawings. Base Bid does not include landscaping, only temporary grassing.

Add. Alt. No. 9: To provide and install downspout boots and roof drainage system. Base Bid to be plastic splash block to discharge downspouts on grade.

REVISIONS

DATE	DESCRIPTION

PROJECT:
VERNON ROAD FIRE STATION
 VERNON ROAD
 LAGRANGE GEORGIA

TITLE:
INDEX OF SHEETS
ABBREVIATIONS
LEGENDS

MODIFIED DATE:	JOB NO:
ISSUED DATE: FOR BID AND PERMIT	1731
07 MAY 2018	SHEET: G-2