


DOOR SCHEDULE																			
MARK	LOCATION	NUMBER OF LEAVES	DOOR TYPE	DOORS						FRAME						HARDWARE SET	FIRE RATING	COMMENTS	
				WIDTH	HEIGHT	DEPTH	MATERIAL	FINISH	MANUFACTURER	MODEL	FRAME TYPE	MATERIAL	FINISH	HEAD	JAMB				SILL
1	SALES FLOOR	2	A	6'-0"	7'-0"	0'-1.34"	GLASS/ALUM	DARK BRONZE ANODIZED	OLD CASTLE	-	STORE FRONT A1	ALUMINUM	DARK BRONZE ANODIZED	15/A701	10/A701	5/A701	1	-	PAIR OF DOORS - MEDIUM STILE WITH 10" BOTTOM RAIL. SHGC VALUE = 0.27, U-VALUE = 6.0
2	SALES FLOOR	2	A	6'-0"	7'-0"	0'-1.34"	GLASS/ALUM	DARK BRONZE ANODIZED	OLD CASTLE	-	STORE FRONT B1	ALUMINUM	DARK BRONZE ANODIZED	15/A701	10/A701	5/A701	1	-	PAIR OF DOORS - MEDIUM STILE WITH 10" BOTTOM RAIL. SHGC VALUE = 0.27, U-VALUE = 6.0
3	RECEIVING	2	B	6'-0"	7'-0"	0'-1.34"	HOLLOW METAL	EP-1	ASSA ABLDY	3'0" x 7'0" x 1 3/4" Prime	2	HOLLOW METAL	EP-1	11/A701	6/A701	1/A701	2	-	INSULATED PAIR OF DOORS, R-VALUE = 5.21
4	DRY GOODS RECEIVING	1	C	3'-0"	7'-0"	0'-1.34"	HOLLOW METAL	EP-1	-	-	2	HOLLOW METAL	EP-1	11/A701	6/A701	1/A701	3	-	INSULATED DOOR, R-VALUE = 5.21
5	WOMEN'S RESTROOM	1	C	3'-0"	7'-0"	0'-1.34"	SOLID CORE PARTICLE BOARD	WILSONART GREY 1500-60	VT INDUSTRIES	303H	1	HOLLOW METAL	IP-10	12/A701	7/A701	2/A701	4	-	UNDERCUT DOOR 1"
6	MEN'S RESTROOM	1	C	3'-0"	7'-0"	0'-1.34"	SOLID CORE PARTICLE BOARD	WILSONART GREY 1500-60	VT INDUSTRIES	303H	1	HOLLOW METAL	IP-10	12/A701	7/A701	2/A701	4	-	UNDERCUT DOOR 1"
7	DATA	2	H	3'-0"	9'-10"	0'-1.34"	STEEL	IP-7	LYONS	-	1	METAL CHANNELS BY MANUF.	IP-7	--	--	--	BY MANUF.	-	LOUVERED DOOR
8	SALES FLOOR	1	--	3'-0"	7'-0"	--	--	--	--	--	BY LOCKNET	WELDED HOLLOW METAL	IP-7	13/A701	8/A701	3/A701	BY MANUF.	-	
9	RECEIVING	1	--	3'-0"	7'-0"	--	--	--	--	--	BY LOCKNET	WELDED HOLLOW METAL	IP-7	13/A701	8/A701	3/A701	BY MANUF.	-	
10	FREEZER	1	E	3'-0"	7'-0"	0'-2"	STEEL	STAINLESS	CROWNTONKA	#F3066C	BY MANUF.	GALVANIZED STEEL	EMBOSSD	--	--	--	6	-	DUAL THERMOMETER, HEATED VENT, LIGHT SWITCH, PROVIDE KICK PLATE AND VISION WINDOW.
11	BEVERAGE COOLER	1	F	3'-0"	7'-0"	0'-2"	STEEL	EMBOSSD GALVANIZED	CROWNTONKA	#C3066C	BY MANUF.	GALVANIZED STEEL	EMBOSSD	--	--	--	6	-	DUAL THERMOMETER, HEATED VENT, LIGHT SWITCH, PROVIDE KICK PLATE AND VISION WINDOW.
12	ELECTRICAL CLOSET	1	G	10'-0"	8'-8"	0'-2"	STEEL	DARK BRONZE	WAYNE DALTON	823 C	BY MANUF.	STEEL	EP-1	14/A701	9/A701	4/A701	BY MANUF.	-	INSULATED METAL COILING DOOR, MANUF. OPERATION, PROVIDE EXTERIOR MOUNT WITH SEALS AND WEATHERSTRIPPING. R-VALUE =
13	TOWER ACCESS DOOR	1	D	3'-0"	3'-2"	0'-1.34"	HOLLOW METAL	IP-7	-	-	3	HOLLOW METAL	EP-1	-	-	-	7	-	PROVIDE LOUVERED VENT

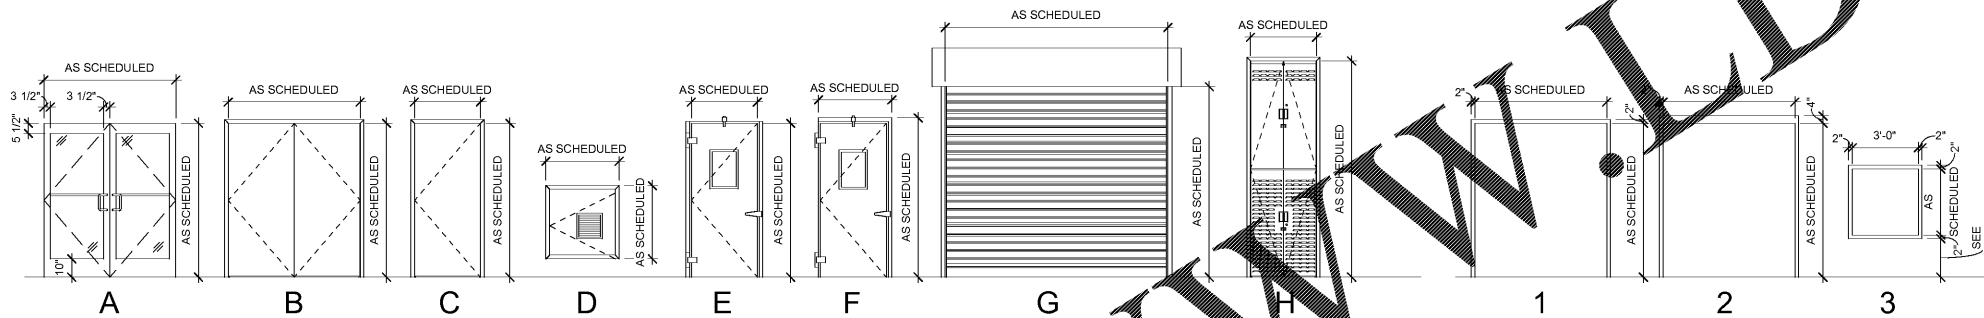

B1 DOOR TYPES
1/4" = 1'-0"

A1 FRAME TYPES
1/4" = 1'-0"

DOOR HARDWARE				
GROUP 1 DOUBLE ENTRY DOORS				
QTY	ITEM	DESCRIPTION	MODEL NUMBER	FINISH
2	CONTINUOUS HINGES	ROTON	ROTON 224HD	313
1	3 POINT LOCK, THRESH. RPD, HEADER BOLT	ADAMS RITE	MS1850-505/4015/4016	313
1	THUMBTURN	ADAMS RITE	CY-3	313
1	PERMANENT KEY CORE (G KEYWAY) BY RACETRAC	BEST	#C6GI-526	313
1	CYLINDER HOUSING SFIC	SCHLAGE	8913	313
2	CLOSER	LCN	404	695
2	DROP PLATE	LCN	404	695
2	FLUSH BOLTS	OBE	FB-12	613
1	DUST PROOF STRIKE	ES	DPI	613
2	SETS PUSH/RELEASE	OBE	FB-21	313
1	THRESHOLD	OBE	TH-43	AL
2	DOOR BOTTOM SEALS	OBE	D118/D120	313
SET 2: RECEIVING				
QTY	ITEM	MANUFACTURER	MODEL NUMBER	FINISH
1	STANDARD HINGE	MCKINNEY	MPB91 - 4 1/2" X 4 1/2"	US32D-NRP
1	CYLINDER	LOCKNET	LN2049C SFIC MORTISE CYLINDER	626
1	RIM CYLINDER	LOCKNET	LN2050	626
1	SURFACE CLOSER	YALE	3501-PA 689	689
2	KICK PLATES	ROCKWOOD	K1050 8"X34"	US32D
2	LOCK PROTECTOR	ROCKWOOD	SD1260 US32D	US32D
1	THRESHOLD	PEMCO	254 72"	C
2	WEATHERSTRIPPING	PEMCO	18062CNB 36"	C
1	WEATHERSTRIPPING	PEMCO	303AV-72"X84"	A
1	MISCELLANEOUS ITEM	PEMCO	PEMCO 346A 76"	A
2	MISCELLANEOUS ITEM	DON-JO	HDCC-3012-626	626
1	FLUSH BOLT	ROCKWOOD	555 12"	626
1	PANIC DEVICE	DETEX	V4003 P 628 94 EB	-
SET 3: DRY GOODS RECEIVING				
QTY	ITEM	MANUFACTURER	MODEL NUMBER	FINISH
3	STANDARD HINGES	MCKINNEY	MPB91 - 4 1/2" X 4 1/2"	US32D-NRP
1	CYLINDER	LOCKNET	LN2049C SFIC MORTISE CYLINDER	626
1	RIM CYLINDER	LOCKNET	LN2050	626
1	SURFACE CLOSER	YALE	3501-PA 689	689
1	KICK PLATES	ROCKWOOD	K1050 8"X34"	US32D
1	LOCK PROTECTOR	ROCKWOOD	SD1260 US32D	US32D
1	THRESHOLD	PEMCO	254A36"	C
1	WEATHERSTRIPPING	PEMCO	18062CNB 36"	C
1	WEATHERSTRIPPING	PEMCO	303AV-84"X84"	A
1	MISCELLANEOUS ITEM	PEMCO	PEMCO 346A 40"	A
1	MISCELLANEOUS ITEM	DON-JO	HDCC-3012-626	626
1	PANIC DEVICE	DETEX	V4003 P 628 94 EB	-
SET 4: RESTROOMS				
QTY	ITEM	MANUFACTURER	MODEL NUMBER	FINISH
3	HINGES	ROCKWOOD	MPB79 - 4 1/2" X 4 1/2"	626
1	PUSH PLATE	ROCKWOOD	70 C - 4" X 16"	630
1	PULL PLATE	ROCKWOOD	107 X 70C 4" X 16"	630
1	CLOSER	YALE	1101BF	689
1	KICK PLATE	ROCKWOOD	K1050 - 10" X 34"	630
1	MOP PLATE	ROCKWOOD	K1050 - 6" X 34"	630
1	WALL STOP	ROCKWOOD	409	630
1	THRESHOLD	-	2" WIDE MARBLE TO MATCH LEVEL OF TILE	-
1	SIGN	ROCKWOOD	3" X 6" ADA SIGN	-
SET 5: COOLER/FREEZER				
QTY	ITEM	MANUFACTURER	MODEL NUMBER	FINISH
1 PR	HINGES	BY COOLER / FREEZER MANUFACTURER	-	-
1	LOCKSET	BY COOLER / FREEZER MANUFACTURER	-	-
1	CLOSER	BY COOLER / FREEZER MANUFACTURER	-	-
1	KICK PLATE	BY COOLER / FREEZER MANUFACTURER	-	-
SET 6: COOLER/FREEZER				
QTY	ITEM	MANUFACTURER	MODEL NUMBER	FINISH
1 PR	HINGES	IVES	5PB1 - 4 1/2" X 4 1/2"	652
1	DEADBOLT	SCHLAGE	B760T	626
1	PERMANENT KEY CORE	SCHLAGE	K1091	626
1	OVERHEAD HOLDER/STOP	GLYNN-JOHNSON	GJ450H	SP28
1	SET PERIMETER SEALS	NGP	5050	-
SET 7: TOWER ACCESS DOOR				
QTY	ITEM	MANUFACTURER	MODEL NUMBER	FINISH
1 PR	HINGES	IVES	5PB1 - 4 1/2" X 4 1/2"	652
1	DEADBOLT	SCHLAGE	B760T	626
1	PERMANENT KEY CORE	SCHLAGE	K1091	626
1	OVERHEAD HOLDER/STOP	GLYNN-JOHNSON	GJ450H	SP28
1	SET PERIMETER SEALS	NGP	5050	-

DOOR GENERAL NOTES

- ALL DOOR GLAZING SHALL BE TEMPERED.
- REFER TO SHEET A001 FOR ADA AND OTHER CODE REQUIREMENTS.
- REFER TO DOOR AND GLAZING SPECIFICATIONS FOR ADDITIONAL INFORMATION.
- DOOR THICKNESS SHALL BE A MINIMUM OF 18 GAUGE MATERIAL.
- EGRESS DOORS SHALL BE A MINIMUM OF 3'-0" IN WIDTH, 6'-8" IN HEIGHT. (IBC 1008.1.1)
- DOORS OPEN A MINIMUM OF 90 DEGREES. (IBC 1008.1.1)
- CLEAR WIDTH OF DOORWAY SHALL BE 32" MINIMUM. (2010 ADA 404.2.3)
- DOUBLE DOORS - AT LEAST ONE MUST COMPLY WITH THE STATEMENTS ABOVE. (IBC 1008.1.1)
- BOTTOM 10" OF DOOR SHALL HAVE A SMOOTH, UNINTERRUPTED SURFACE KICK PLATE. (2010 ADA 404.2.10)
- VERTICAL CLEARANCE SHALL BE 80" MIN, DOOR CLOSER AND DOOR STOPS SHALL BE PERMITTED TO BE 78" ABOVE FINISHED FLOOR. (2010 ADA 404.2.9)
- EFFORT TO OPERATE DOORS IS WITHIN PRESSURE ALLOWED. (2010 ADA 404.2.9)
 - A. INTERIOR DOORS - 5 LBS. MAXIMUM PRESSURE TO OPERATE. (2010 ADA 404.2.9)
 - B. EXTERIOR DOORS - 15 LBS. MAXIMUM PRESSURE TO OPERATE. (2010 ADA 404.2.9)
- ALL DOORS TO HAVE LEVER HANDLES OR EQUIVALENT MOUNTED NOT MORE THAN 42 INCHES ABOVE FINISHED FLOOR.
- EXIT/EGRESS DOORS MEET NFPA 101 (502.1.1) LIFE SAFETY AND NFPA FIRE SAFETY REQUIREMENTS.

DOOR HARDWARE NOTES

- EGRESS DOORS SHALL BE OPERABLE FROM THE INSIDE WITHOUT THE USE OF A KEY OR ANY SPECIAL KNOWLEDGE OR EFFORT. (IBC 1008.1.8)
- OPENING HARDWARE SHALL BE CENTERED BETWEEN 34" AND 48" ABOVE FINISH FLOOR. (IBC 1008.1.8)

DOOR THRESHOLD

- FLOOR(S) OR LANDING(S) SHALL NOT BE MORE THAN 1/2" LOWER THAN THE TOP OF THE THRESHOLD DOORWAY. (2010 ADA 404.2.5)
- CHANGE IN LEVEL BETWEEN 1/4" AND 1/2" SHALL BE BEVELED WITH A GRADIENT OF 1:2. (2010 ADA 303.3) NOTE: A 1/2" MAXIMUM VERTICAL EDGE IS ALLOWABLE AT THRESHOLDS.

DOOR CLOSER

- DOOR AND GATE CLOSER SHALL BE ADJUSTED SO THAT FROM AN OPEN POSITION OF 90 DEGREES, THE TIME REQUIRED TO MOVE THE DOOR TO A POSITION OF 12 DEGREES FROM THE LATCH IS 5 SECONDS MINIMUM. (2010 ADA 404.2.8.1)
- SPRING HINGES, DOOR & GATE HINGES SHALL BE ADJUSTED SO THAT FROM A POSITION OF 70 DEGREES, THE DOOR OR GATE SHALL MOVE TO A CLOSED POSITION IN 1.5 SECONDS MINIMUM (2010 ADA 404.2.8.2)

COAT HOOK

- THE MOUNTING HEIGHT FOR THE COAT HOOK AT THE ACCESSIBLE STALLS SHOULD BE AT 48" MAX TO THE TOP OF COAT HOOK. PER 2010 ADA.

HARDWARE FINISHES

- HINGES (EXTERIOR): 630 (US32D) SATIN STAINLESS STEEL
- CONTINUOUS HINGES: 313 DARK BRONZE ANODIZED (ALUMINUM DOORS) AND 628 CLEAR ANODIZED (HOLLOW METAL DOORS).
- HINGES (INTERIOR METAL DOORS): 652 (US26D).
- LOCKS: 626 (US26D) SATIN CHROME PLATED
- EXIT DEVICES WITH BATTERY POWERED ALARMS: 628 (US28).
- DOOR CLOSER: 689 (POWDER COATED).
- PULL PLATES: 630 (US32D) SATIN STAINLESS STEEL
- PROTECTIVE PLATES: 630 (US32D) SATIN STAINLESS STEEL
- DOOR STOPS: 630 (US32D) SATIN STAINLESS STEEL OR 626 SATIN CHROME PLATED BRASS/BRONZE.
- OVERHEAD HOLDERS: SP28 (POWDER COAT).
- THRESHOLDS: 627 (US27) MILL FINISH ALUMINUM.
- WEATHERSTRIP: 628 (US28) CLEAR ANODIZED ALUMINUM.

RaceTrac
 ARCHITECTURE
 ENGINEERING
 3680 Pleasant Hill Road
 Suite 200
 Duluth, Georgia 30096
 p 770.622.9858
 f 770.622.9535
 www.hillfoleyrossi.com

ISSUE/REVISION RECORD

DATE	DESCRIPTION
08/21/18	ISSUED FOR PERMIT

RaceTrac
 RACETRAC PETROLEUM, INC.
 200 GALLERIA PARKWAY SOUTHEAST
 SUITE 900
 ATLANTA, GEORGIA 30339
 (770) 431-7600

PROJECT NAME
EAST MAIN STREET

CARTERSVILLE GEORGIA
 1325 E. MAIN ST.
 CARTERSVILLE, GA 30121

RACETRAC STORE NUMBER
1310

PROTOTYPE SERIES 5.5K 2.0
2018 RH MO

PLAN MODIFICATION NOTICE

SPB NO. DATE

STANDARD PLAN BULLETINS (SPB) MODIFY THE PROTOTYPE SERIES SET NOTED ABOVE. THE LISTED SPB REPRESENTS THE LATEST MODIFICATION INCORPORATED TO THIS PROTOTYPE SERIES SET AT ORIGINAL RELEASE. THE ISSUE/REVISION RECORD COLUMN ABOVE LISTS ANY REVISIONS OR SPB INCORPORATED IN THIS SET AFTER THE ORIGINAL RELEASE. CONTACT RACETRAC ENGINEERING AND CONSTRUCTION FOR ANY SUBSEQUENT BULLETINS NOT INCORPORATED HEREIN.

PROFESSIONAL SEAL



PROJECT NUMBER
 18.714.00

SHEET TITLE
DOOR HARDWARE AND SCHEDULE

SHEET NUMBER
A700
 ISSUED FOR PERMIT

Order Plans @