


- KEYNOTES**
- 1 SPLIT FACE BLOCK
  - 2 BRICK VENEER
  - 3 ALUMINUM STOREFRONT DOORS
  - 4 ALUMINUM AWNING. SEE DETAILS ON SHEET A5-2.
  - 5 METAL WALL PANEL BY PEMB
  - 6 FLAT METAL WALL PANEL BY PEMB
  - 7 METAL COPING
  - 8 CAST STONE SLOPING SILL WITH METAL FLASHING
  - 9 TUBE STEEL. SEE STRUCTURAL DRAWINGS.
  - 10 STOCK ALUMINUM AWNING SYSTEM
  - 11 NEW GRADE
  - 12 PEMB SIDING
  - 13 3-5/8" METAL STUDS @ 16" O.C.
  - 14 2" CAST IRON ROOF DRAIN TO GRADE. (FULLY INSULATED)
  - 15 8" METAL STUDS @ 16" O.C. WITH 8" BATT INSULATION (R-25)
  - 16 4" CONCRETE PAD WITH TURNDOWN. SLOPE AWAY FROM BUILDING
  - 17 BACKER ROD AND SEALANT
  - 18 EXTERIOR WALL SOUNGE
  - 19 8"x8"x3/8" ANGLE. CONT. WELD TO TUB. STEEL
  - 20 OVERHEAD DOOR (BY PEMB)
  - 21 COILING DOOR (BY PEMB)
  - 22 5/8" C/T. (BY PEMB)
  - 23 SLOPE BEYOND
  - 24 LONG SPAN METAL ROOFING PANEL. 24 GAUGE. STANDARD KYNAR FINISH COATING. PANELS TO BE CONTINUOUS FROM RIDGE TO EAVE. TYP.
  - 25 6" ROLLED INSULATION
  - 26 Z-BURLINS
  - 27 PRE-ENGINEERED METAL BUILDING MAIN FRAME BEAM
  - 28 FINISHED METAL FASCIA & EAVE BY METAL BUILDING SUPPLIER
  - 29 PEMB GUTTER (BY PRE-ENGINEERED METAL BUILDING SUPPLIER)
  - 30 PEMB DOWNSPOUT (BY PRE-ENGINEERED METAL BUILDING SUPPLIER)
  - 31 8" PRE-ENGINEERED WALL GIRTS. SEE STRUCTURAL
  - 32 6" CONCRETE SLAB
  - 33 FLOOR COVERING. SEE INTERIOR FINISH SCHEDULE
  - 34 RESILIENT BASE
  - 35 TERMITE TREAT UNDER ALL SLABS & FOOTINGS 5' OUTSIDE BUILDING
  - 36 NEW GRADE
  - 37 PEMB METAL WALL PANELS ON 12" DENS DECK WITH ROLLED ON VAPOR BARRIER ON BACK SIDE OF PARAPET (TYPICAL)
  - 38 3-5/8" METAL STUD FRAMING W/ 5/8" GYP. BRD. (PAINT)
  - 39 7"x7" LAY-IN CEILING TILE AND GRID
  - 40 12" DENS DECK WITH FULLY ADHERED SINGLE PLY MEMBRANE AND TERMINATION BAR SET IN SEALANT
  - 41 PEMB REVERSE ROLL METAL PANELS ON 6" METAL STUDS @ 16" O.C. WITH 12" DENS DECK AND VAPOR BARRIER.
  - 42 6" ALUMINUM STOREFRONT WITH 1" ARCTIC BLUE GLASS
  - 43 WRAP TUBE STEEL WITH ALUMINUM CLOSURE PANELS TO MATCH STOREFRONT
  - 44 P.T. BLOCKING
  - 45 6" METAL STUDS (16 GA.) @ 16" O.C. WITH 12" DENS DECK AND SPRAY ON AIR/WATER BARRIER. BASE BID TO BE PEMB REVERSE ROLL WALL PANELS. ADD. ALT. NO. 1 & 2 TO BE CAST STONE WITH ADJUSTABLE MASONRY ANCHORS @ EACH 2 S.F.

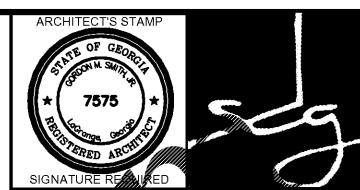

SMITH DESIGN GROUP, INC.  
 280 WEST WILKINSON STREET  
 LAGRANGE, GEORGIA 30240  
 706-882-5511 www.SDGarch.net

REVISIONS	
DATE	DESCRIPTION

PROJECT:  
**VERNON ROAD FIRE STATION**  
 VERNON ROAD  
 LAGRANGE GEORGIA

TITLE:  
**WALL SECTION**

MODIFIED DATE:	JOB NO: <b>1731</b>
ISSUED DATE: FOR BID AND PERMIT <b>07 MAY 2018</b>	SHEET: <b>A5-1</b>

**1**  
**A5-1**  
**WALL SECTION**  
 SCALE: 1" = 1'-0"

Order Plans @

www.LDOnline.com