


REACH-IN FREEZER/COOLER UNIT



HYBRID™ DISPLAY CASES

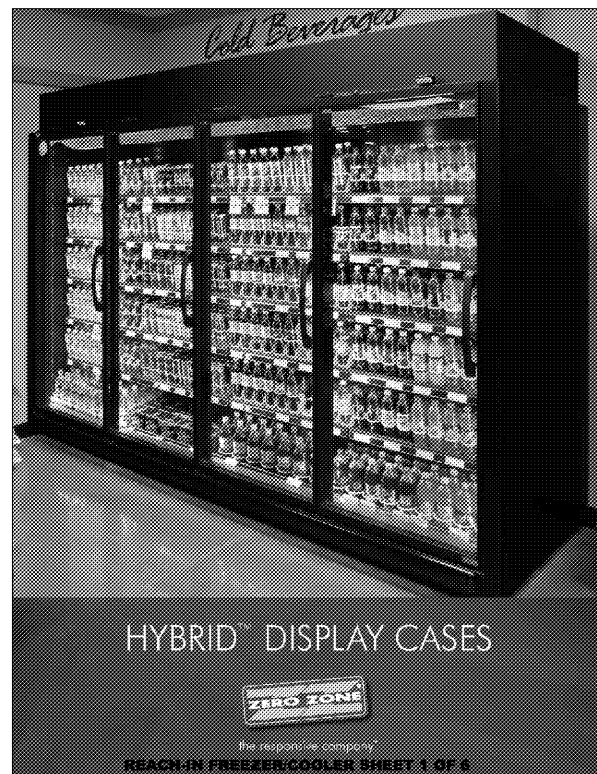

REACH-IN FREEZER/COOLER SHEET 1 OF 6



Modular refrigeration system installs quickly and easily.

Increased product & ratings with maximum product visibility.




REACH-IN FREEZER/COOLER SHEET 2 OF 6

THE BEST OF BOTH WORLDS

Zero Zone Hybrid™ freezers and coolers combine all of the benefits of a self-contained display case with the selling power and reliability of a supermarket case. Bringing together the best of both worlds, these remote cases are configured with a remarkably easy-to-install, top-mount modular refrigeration kit.


- ✓ A 2-door Hybrid™ has the same capacity as a typical 3-door self-contained unit... in 12" less floor space!
- ✓ Cases fit through 80" tall doorways!
- ✓ Everything is pre-wired and labeled.
- ✓ Pre-charged refrigeration piping with quick-connect threaded couplings.
- ✓ **Electronic control** — time clock, temperature and defrost control, visual and audible temperature alarm, and network communication capability.
- ✓ **Condensate collection and removal system** — collection pan, pump, float switch, condensate discharge pan with heater element, and connecting tubing.

*Optional door configurations are available for Hybrid™ Merchandiser Hybrid™ cases through doorways as low as 70". Consult factory for details.

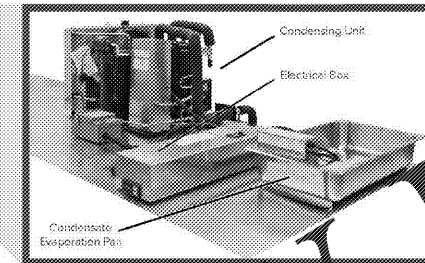

REACH-IN FREEZER/COOLER SHEET 3 OF 6

Also Available as a Hybrid™...

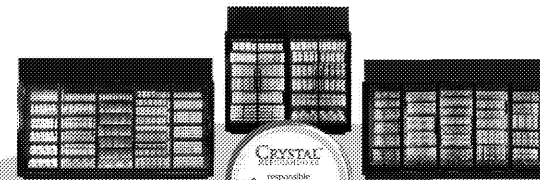

Zero Zone products are built with today's modern retailers in mind—assembled in the USA with the highest quality and innovation. Zero Zone gives you the flexibility, style, and energy efficiency you demand, while providing you with the responsive and personalized service you deserve.



REACH-IN FREEZER/COOLER SHEET 4 OF 6

Dollar Tree/Family Dollar Highlight™ Merchandiser Hybrid™ Specs
Medium and Low Temp Hybrid™ Reach-ins with 30" x 58" Doors RHCC30 & RHZC30

Note: All Zero Zone display cases are model tested for optimum energy efficiency under the U.S. model code DOE, EEC, and IEC energy requirements. * Zero Zone Hybrid™ is defined and listed as a remote self-contained display case.

| PHYSICAL DATA | Medium Temp | | | | | | Low Temp | |
|------------------|-------------|-------|-------|-------|-------|-------|----------|-------|
| | 11111 | 11111 | 11111 | 11111 | 11111 | 11111 | 11111 | 11111 |
| Forming (ft) | 27.5 | 47.4 | 55.1 | 62.7 | 70.3 | 77.9 | 85.5 | 93.1 |
| Height (ft) | 56 | 83 | 100 | 127 | 154 | 181 | 208 | 235 |
| Shelf Depth (in) | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 |
| Weight (lbs) | 828 | 1,078 | 1,328 | 1,578 | 1,828 | 2,078 | 2,328 | 2,578 |

| ELECTRICAL DATA | WITH CONDENSATE EVAPORATION SYSTEM* | | | | | | WITHOUT CONDENSATE EVAPORATION SYSTEM | |
|-----------------|-------------------------------------|-------|-------|-------|-------|-------|---------------------------------------|--|
| | 11111 | 11111 | 11111 | 11111 | 11111 | 11111 | 11111 | |
| MCCP (amps) | 15 | 15 | 15 | 15 | 15 | 15 | 15 | |
| MCCP (amps) | 3.7 | 7.8 | 11.9 | 16.0 | 20.1 | 24.2 | 28.3 | |


| ENERGY DATA | WITH CONDENSATE EVAPORATION SYSTEM* | | | | | | WITHOUT CONDENSATE EVAPORATION SYSTEM | |
|----------------------|-------------------------------------|-------|-------|-------|-------|-------|---------------------------------------|--|
| | 11111 | 11111 | 11111 | 11111 | 11111 | 11111 | 11111 | |
| Daily Energy (kWh) | 1.1 | 11.1 | 11.1 | 11.1 | 11.1 | 11.1 | 11.1 | |
| Boarded Heat (Btu/h) | 1,095 | 1,577 | 1,559 | 2,136 | 2,614 | 3,192 | 3,770 | |

| REFRIGERATION | WITH CONDENSATE EVAPORATION SYSTEM* | | | | | | WITHOUT CONDENSATE EVAPORATION SYSTEM | |
|---|-------------------------------------|---------|---------|---------|---------|---------|---------------------------------------|--|
| | 11111 | 11111 | 11111 | 11111 | 11111 | 11111 | 11111 | |
| Zero Zone Condensing Unit Size (Rated Weight (lbs)) | 69-9933 | 69-9934 | 69-9935 | 69-9936 | 69-9937 | 69-9938 | 69-9939 | |
| Condensate Pump (lbs) | 100 | 100 | 100 | 100 | 100 | 100 | 100 | |

REGULATORY DATA

| TGA (Total Gator Area) (ft²) | WITH CONDENSATE EVAPORATION SYSTEM* | | | | | | WITHOUT CONDENSATE EVAPORATION SYSTEM | |
|------------------------------|-------------------------------------|-------|-------|-------|-------|-------|---------------------------------------|--|
| | 11111 | 11111 | 11111 | 11111 | 11111 | 11111 | 11111 | |
| 11111 | 15.64 | 35.46 | 51.27 | 67.08 | 82.89 | 98.70 | 114.51 | |
| 11111 | 4.92 | 6.30 | 8.07 | 9.45 | 11.82 | 13.20 | 15.57 | |

2 REACH-IN FREEZER/COOLER SHEET 5 OF 6

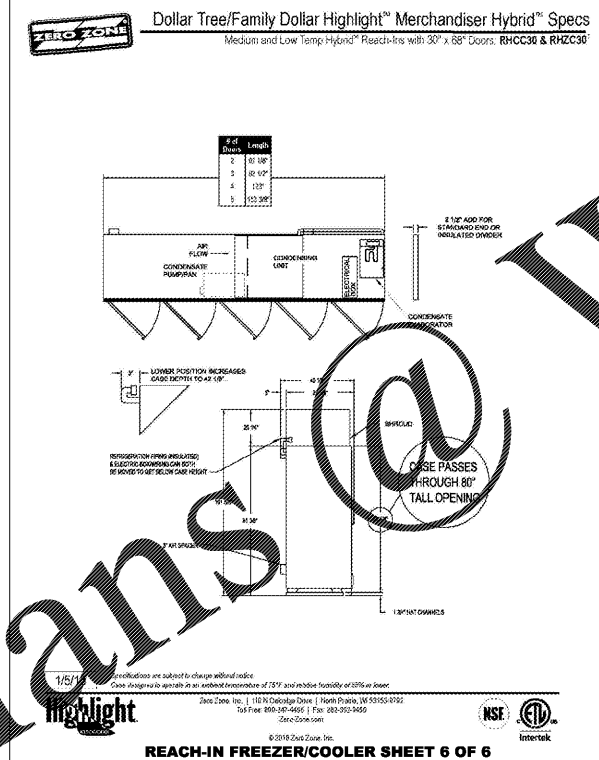

WWW.DOLLARTREE.COM

Order Plans

description
by
mark date
revisions

FOR INFORMATION ONLY

project
drawing
REFRIGERATION SPECIFICATIONS
REACH-IN UNITS DETAILS AND SPECIFICATIONS

DSI

FOR REFERENCE ONLY