

KPS GLOBAL PREFABRICATION
WALK-IN FREEZER/COOLER UNIT



NSF LABEL			
PANEL THICKNESS	3 1/2"	4"	5"
(U" VALUE=1/R" R" VALUE	25	32	40
WALL AND FILTRATION LOAD ONLY PRODUCT FULL DOWN LOAD NOT INCLUDED AMBIENT ESTIMATED AT 75° FOR INDOOR AND 100° FOR OUTDOOR WALK-INS		REFRIGERATION PROVIDED	
ROOM NAME	BTU/HR	YES	
COOLER	4,760	X	
FREEZER	5,720	X	

kps GLOBAL ENGINEERING BULLETIN NO: 6415
SUBJECT: NSF LABELING DATE: April 15, 2016

The National Sanitation Foundation (NSF) in accordance with Standards 7 and 51 establishes minimum food protection and sanitation requirements for the materials, design, manufacture construction and performance of walk-in coolers and freezers and their related components. An NSF inspector audits each of our facilities every three months.

When specified on the drawings, an NSF label is applied to the interior of the door section, latch side or to the interior of the panel adjacent to an opening when a door section is not used.

A standard NSF label is applied to units with panels and refrigeration supplied by KPS Global. An NSF "COMPONENT" label is applied when panels only are supplied by KPS Global and the refrigeration is supplied by someone else.



When specified on the drawings, a "PACKAGED PRODUCT ONLY" label is used

kps GLOBAL ENGINEERING BULLETIN NO: 6420
SUBJECT: ETL ELECTRICAL LABELING DATE: April 15, 2016

ETL Testing Laboratories has conducted tests and evaluation of KPS Global wiring methods and installation in accordance with UL-471, CAN/CSA C22.2 and the National Electrical Code, NFPA 70. An ETL inspector audits each of our facilities every three months.

An ETL label is applied to the interior of the door section, latch side or to the interior of the panel adjacent to any factory installation of wiring or conduit.

A separate Procedures Manual is included as part of the ETL listing program. Each facility has a separate label and listing number.

KPS Global
ETL LOGO
HERE
LISTING NO: 1281260
HEATER RATING-FREEZER DOOR ONLY
5.0 AMPS MAX
LIGHT RATINGS
LIGHT FIXTURE MAY BE PROVIDED BY KPS GLOBAL OR MAY BE PROVIDED BY OTHERS. THE SWITCH PROVIDED ON SLEEVABLE FOR 15 AMP CIRCUIT. MAXIMUM FIXTURE LOAD MUST BE BASED ON THE REQUIREMENTS OF THE NEC.

KPS Global
ETL LOGO
HERE
LISTING NO: 1281260
HEATER RATING-FREEZER DOOR ONLY
5.0 AMPS MAX
LIGHT RATINGS
LIGHT FIXTURE MAY BE PROVIDED BY KPS GLOBAL OR MAY BE PROVIDED BY OTHERS. THE SWITCH PROVIDED ON SLEEVABLE FOR 15 AMP CIRCUIT. MAXIMUM FIXTURE LOAD MUST BE BASED ON THE REQUIREMENTS OF THE NEC.

CANADIAN LABEL

kps GLOBAL ENGINEERING BULLETIN NO: 6423
SUBJECT: UL LABELING DATE: April 15, 2016

Underwriters Laboratories (UL) has conducted flammability tests on KPS Global products in accordance with UL-723 for surface burning characteristics. UL also conducted tests for Canadian Classification in accordance with CANULC-S102 AND ULCORP-C376. A UL inspector audits each of our facilities every three months.

When specified on the drawings, an UL label is applied to the interior of the door section, latch side or to the interior of the panel adjacent to an opening when a door section is not used and to each corner panel (five labels per unit).

A separate Procedures Manual is included as part of the UL listing program. Each facility has a separate label.

UL US
LOGO
HERE
UL723ASTM E-84 CLASS 1 PANEL, INSULATION TO 1/2" THICKNESS
PAINTED OR NON-PAINTED STEEL FINISH
FLAME SPREAD INDEX: 0 OR LESS
SMOKED DEVELOPED INDEX: 0 OR LESS
UL LISTING NO: 459 OR LESS
UL ADDRESS: 3701
UL PHONE: 419.924.1000

ULC
LOGO
HERE
SURFACE BURNING CHARACTERISTICS 99/5
INSULATED BUILDING PANELS
LISTED IN ACCORDANCE WITH CANULC-S138
SEE ULC List of Equipment and materials, Building Materials Directory
COMPOSITE PANELS
LISTED IN ACCORDANCE WITH CANULC-S102 AND S127
BUILDING PANELS
PAINTED OR NON-PAINTED STEEL FINISH
FLAME SPREAD INDEX: 0 OR LESS
SMOKED DEVELOPED INDEX: 0 OR LESS
UL LISTING NO: 396
UL ADDRESS: 3701
UL PHONE: 419.924.1000

CANADIAN LABEL

L A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkproducts.com

PTN042H6AE

Project: Dollar Tree Stores QUOTATION:
Location: Various Submitted by: Mike S. Jarrell
Customer: DATE: 7/9/2015
Manufacturer: For Record By:
Tag: Cooler For Approval Date:

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / Ph / Hz	MCA1	MOP1	Unit Amps	NEMA Receptacle	APPROX. NET WEIGHT	Rating Charge (oz)
R404A	240	115V/1/60	11.3	15	9.3	5-20R	275	45

Capacity (BTU/hr) at 95°F Ambient

+35°F Room	+38°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT TEMP CAPACITY (BTU/hr) at 95°F Ambient
4360	4570	0	0	0	



SIZES (feet)

A	B	C	D	E	F	G	H	I	J	K
28.1	15.3	14.1	20.4							

DIMENSIONS (inches)

L	M	N	P	R	S	T	U	V	W

WALK-IN COOLER SHEET 1 OF 2

L A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkproducts.com

PTN042H6AE


Project: Dollar Tree Stores QUOTATION:
Location: Various Submitted by: Mike S. Jarrell
Customer: DATE: 7/9/2015
Manufacturer: For Record By:
Tag: Cooler For Approval Date:

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / Ph / Hz	MCA1	MOP1	Unit Amps	NEMA Receptacle	APPROX. NET WEIGHT	Rating Charge (oz)
R404A	240	115V/1/60	11.3	20	15.3	6-20R	275	45

Capacity (BTU/hr) at 95°F Ambient

+35°F Room	+38°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT TEMP CAPACITY (BTU/hr) at 95°F Ambient
0	0	7000	5860	3910	

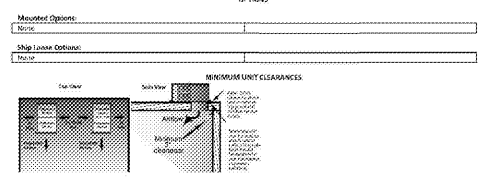

SIZES (feet)

A	B	C	D	E	F	G	H	I	J	K
52.42	19.4	24.75	38.25							

DIMENSIONS (inches)

L	M	N	P	R	S	T	U	V	W

WALK-IN COOLER SHEET 2 OF 2

L A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkproducts.com

PTN052L6BE


Project: Dollar Tree Stores QUOTATION:
Location: Various Submitted by: Mike S. Jarrell
Customer: DATE: 7/9/2015
Manufacturer: For Record By:
Tag: Freezer For Approval Date:

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / Ph / Hz	MCA1	MOP1	Unit Amps	NEMA Receptacle	APPROX. NET WEIGHT	Rating Charge (oz)
R404A	900	230/1/60	18.1	20	15.3	6-20R	275	45

Capacity (BTU/hr) at 95°F Ambient

+35°F Room	+38°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT TEMP CAPACITY (BTU/hr) at 95°F Ambient
0	0	7000	5860	3910	

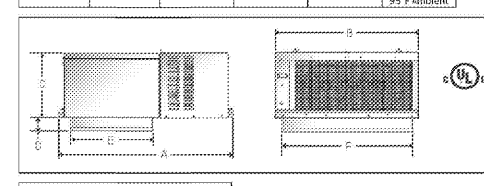

SIZES (feet)

A	B	C	D	E	F	G	H	I	J	K
52.42	19.4	24.75	38.25							

DIMENSIONS (inches)

L	M	N	P	R	S	T	U	V	W

WALK-IN FREEZER SHEET 1 OF 2

L A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkproducts.com

PTN052L6BE


Project: Dollar Tree Stores QUOTATION:
Location: Various Submitted by: Mike S. Jarrell
Customer: DATE: 7/9/2015
Manufacturer: For Record By:
Tag: Freezer For Approval Date:

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / Ph / Hz	MCA1	MOP1	Unit Amps	NEMA Receptacle	APPROX. NET WEIGHT	Rating Charge (oz)
R404A	900	230/1/60	18.1	20	15.3	6-20R	275	45

Capacity (BTU/hr) at 95°F Ambient

+35°F Room	+38°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT TEMP CAPACITY (BTU/hr) at 95°F Ambient
0	0	7000	5860	3910	

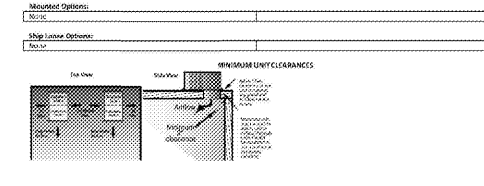

SIZES (feet)

A	B	C	D	E	F	G	H	I	J	K
52.42	19.4	24.75	38.25							

DIMENSIONS (inches)

L	M	N	P	R	S	T	U	V	W

WALK-IN FREEZER SHEET 2 OF 2

- GENERAL NOTES:
- THE PROPOSED FREEZER/COOLER UNIT SIZE IS INDICATED ON FLOOR PLAN. ALL WALK-IN & MERCHANDISING UNITS ARE SELF CONTAINED AND DO NOT REQUIRE A FLOOR DRAIN.
 - REFER TO SPECIFICATIONS
 - INSTALLATION OF THESE NSF, ETL & UL LISTED UNITS SHALL COMPLY WITH ALL STATE AND LOCAL CODES PER APPROVED PLANS.

FOR REFERENCE ONLY

project drawing

D63

WWW.LDILine.com

FOR INFORMATION ONLY