


Order Plans

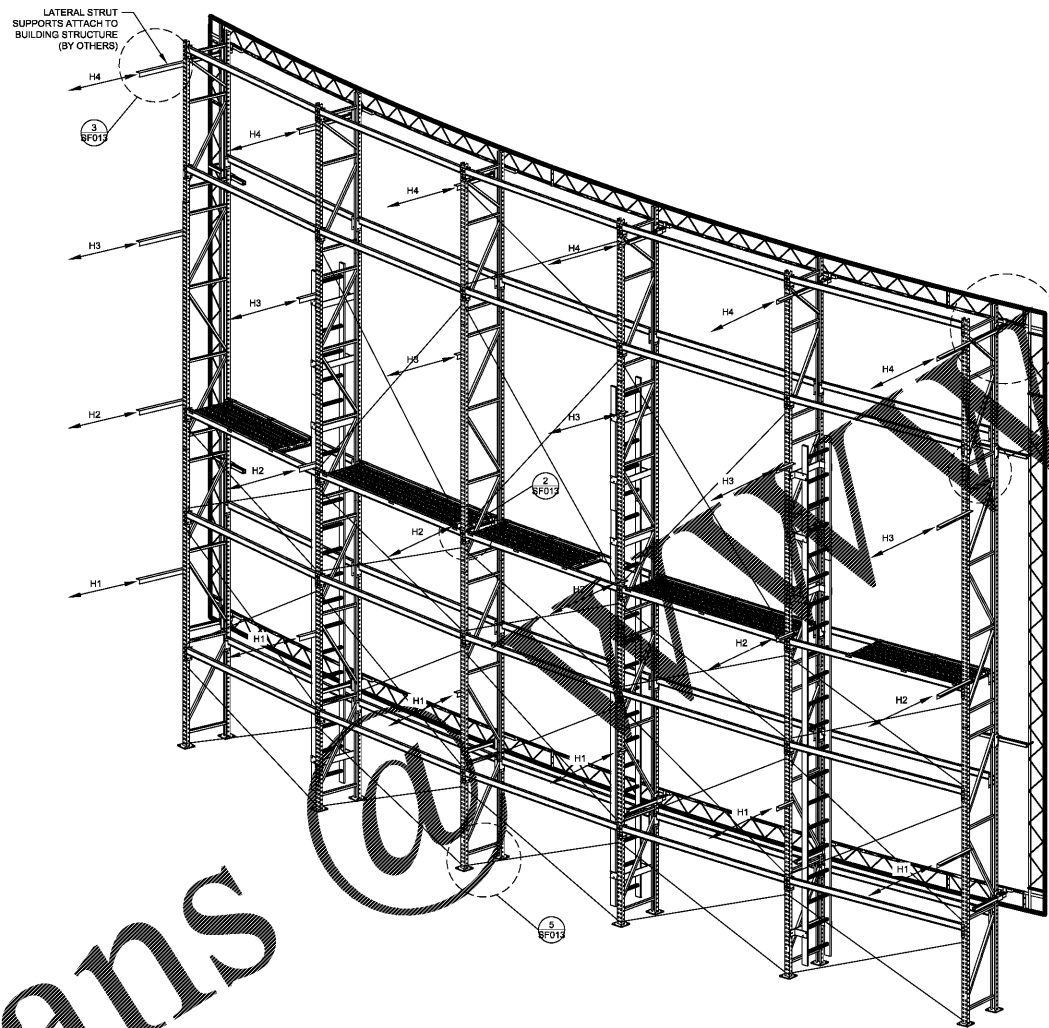

REFERENCE NOTES:
1. SEE SHEET SF007 FOR STRUCTURAL GENERAL NOTES.

LATERAL STRUT REACTION TABLE (KIPS)			
LOCATION	REACTIONS	W/D = 1.75	W/D = 2.5 FOR MASONRY
H1	± 0.009	± 0.016	± 0.023
H2	± 0.036	± 0.063	± 0.090
H3	± 0.019	± 0.033	± 0.048
H4	± 0.054	± 0.085	± 0.135

- NOTE:
- REACTIONS ARE ASD SEISMIC LOADS WITH A LOAD FACTOR = 0.7E
 - W/D = 1.75 O.S. FACTOR FOR THEATER WALL ANALYSIS AND SCREEN CONNECTION TO WALLS NOT CONSTRUCTED OF MASONRY.
 - W/D = 2.5 O.S. FACTOR FOR CONNECTIONS TO MASONRY WALLS PER ASCE 13.4.2.2.

BACK SIDE ISOMETRIC VIEW
NTS

1
SF008



PMA Engineering
4717 Shownee Mission Parkway
Suite 100, Overland Park, KS 66202
P: (913) 831-1222, F: (913) 831-0148
www.pmaengineering.com
PMA Engineering, © 2018
(PROJECT # 118075)

STRONG **MDI**
Screen Systems

1440, RAOUL-CHARRETTE
JOLIETTE, QC, CANADA
J6E
Tel.: 1-877-755-3111
Fax: 514-0-755-3111
strongdi.com

5/21/2018

PROJECT: AMC MADISON YARDS
ATLANTA, GA

AUDITORIUM #5 & 8

DATE	BY	REVISION	DESCRIPTION

DRAWING TITLE:

SCREEN STRUCTURE
ISOMETRIC VIEW
BACK SIDE

DATE: 05/10/2018

SCALE: NO SCALE
(THE ORIGINAL SIZE OF THIS DRAWING IS 36"x24")

DRAWN BY: BWP

APPROVED BY: TDA

JOB NO: SECTION:

DRAWING NUMBER:
SF008

INFORMATIONS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF MDI AND PMA. IT IS FORBIDDEN TO USE OR REPRODUCE IN WHOLE OR IN PART, EXCEPT WITH THE PRIOR WRITTEN CONSENT OF MDI AND PMA.