

GENERAL PARTITION NOTES

- 1. PLAN DIMENSIONS ARE FACE OF STUD, CMU OR FINISH FACE OF EXISTING WALL. CONSTRUCTION UNLESS SPECIFICALLY NOTED OTHERWISE.


CONTROL JOINT NOTES

- 1. LOCATE CMU CONTROL JOINTS AS FOLLOWS: A. ON ONE SIDE OF ALL WALL OPENINGS SMALLER THAN 6'-0" IN WIDTH (1'-4" FROM ROUGH OPENING).

WALL TAG LEGEND

Table with columns: WALL VARIANT, MEMBER THICKNESS, FINISHING, and Masonry. Lists various wall types like CMU, Steel Stud, and Wood Stud with their respective finishes and thicknesses.

mcmillan
pazdan
smith
ARCHITECTURE



WINDSOR AUGHTRY
HOMEZ ASHEVILLE
3804 PORT RD.
ARDEEN, NC 28704

Table with columns: Number, Description, Date. Contains revision notes for the construction document.

PRINCIPAL IN CHARGE: BZ
PROJECT ARCHITECT: BT
DRAWN BY:
SHEET TITLE: INTERIOR PARTITION TYPES

SHEET NO: A003
PROJ. NO: 01378.00

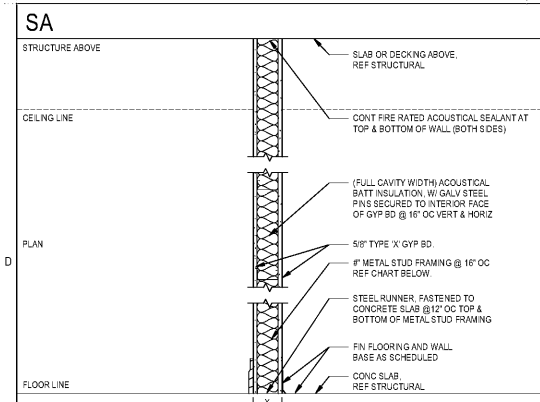


Table for partition type SA. Columns: STUD SIZE (3'6\", 4'0\", 4'6\"), ACTUAL DIMENSION 'X' (4'7 1/2\", 5'1 1/2\", 5'7 1/2\"), FIRE RATING (UL-RJ423), ACOUSTICAL RATING (W/ BATTS) (45 STC).

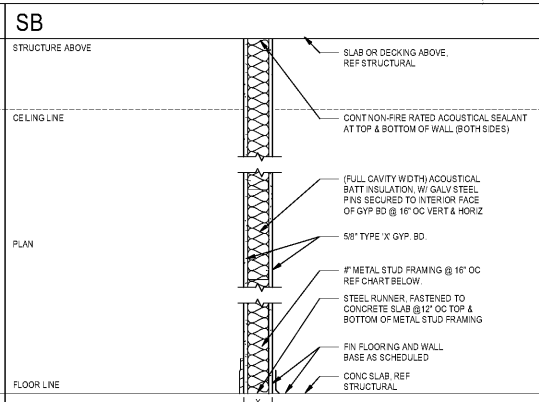


Table for partition type SB. Columns: STUD SIZE (3'6\", 4'0\", 4'6\"), ACTUAL DIMENSION 'X' (4'7 1/2\", 5'1 1/2\", 5'7 1/2\"), FIRE RATING (45 STC), ACOUSTICAL RATING (W/ BATTS) (45 STC).

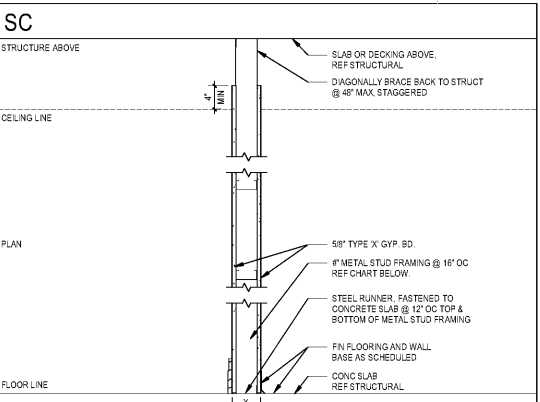


Table for partition type SC. Columns: STUD SIZE (3'6\", 4'0\", 4'6\"), ACTUAL DIMENSION 'X' (4'7 1/2\", 5'1 1/2\", 5'7 1/2\"), FIRE RATING (45 STC), ACOUSTICAL RATING (W/ BATTS) (45 STC).

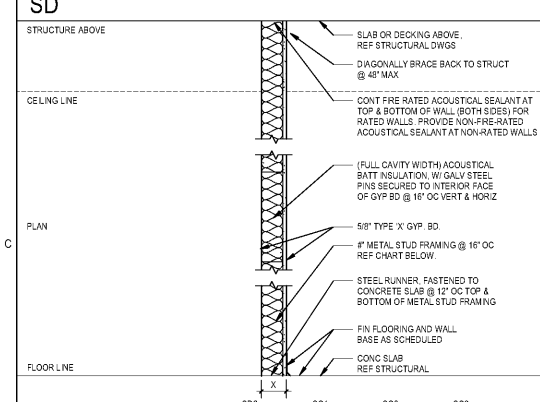


Table for partition type SD. Columns: STUD SIZE (3'6\", 4'0\", 4'6\"), ACTUAL DIMENSION 'X' (4'7 1/2\", 5'1 1/2\", 5'7 1/2\"), FIRE RATING (45 STC), ACOUSTICAL RATING (W/ BATTS) (45 STC).

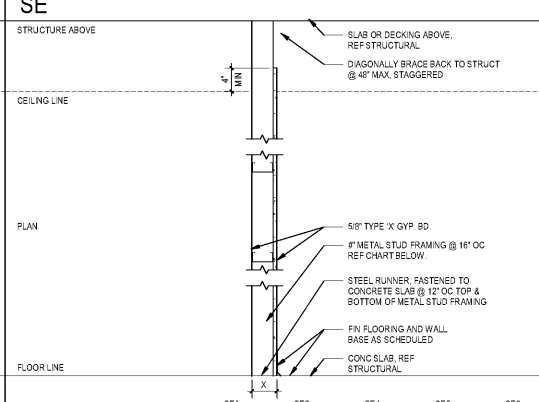


Table for partition type SE. Columns: STUD SIZE (3'6\", 4'0\", 4'6\"), ACTUAL DIMENSION 'X' (4'7 1/2\", 5'1 1/2\", 5'7 1/2\"), FIRE RATING (45 STC), ACOUSTICAL RATING (W/ BATTS) (45 STC).

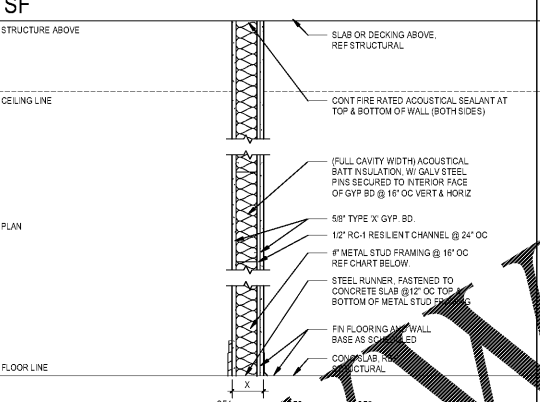


Table for partition type SF. Columns: STUD SIZE (3'6\", 4'0\", 4'6\"), ACTUAL DIMENSION 'X' (4'7 1/2\", 5'1 1/2\", 5'7 1/2\"), FIRE RATING (45 STC), ACOUSTICAL RATING (W/ BATTS) (45 STC).

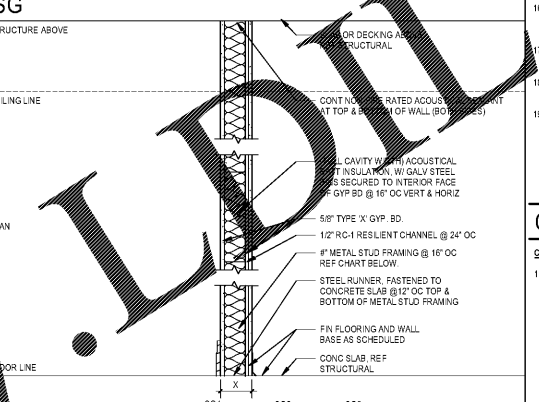


Table for partition type SG. Columns: STUD SIZE (3'6\", 4'0\", 4'6\"), ACTUAL DIMENSION 'X' (4'7 1/2\", 5'1 1/2\", 5'7 1/2\"), FIRE RATING (45 STC), ACOUSTICAL RATING (W/ BATTS) (45 STC).

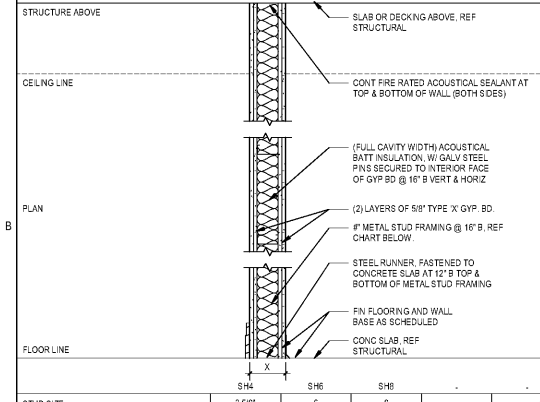


Table for partition type SH. Columns: STUD SIZE (3'6\", 4'0\", 4'6\"), ACTUAL DIMENSION 'X' (4'7 1/2\", 5'1 1/2\", 5'7 1/2\"), FIRE RATING (45 STC), ACOUSTICAL RATING (W/ BATTS) (45 STC).

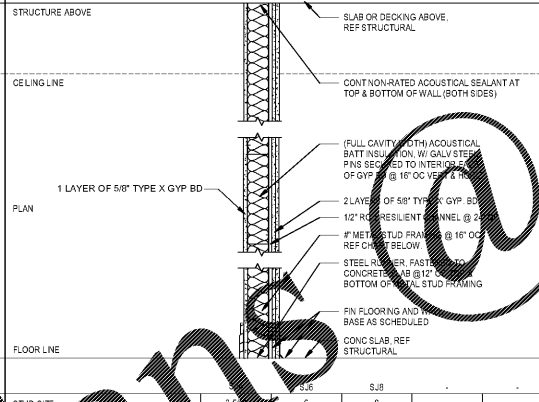


Table for partition type SJ. Columns: STUD SIZE (3'6\", 4'0\", 4'6\"), ACTUAL DIMENSION 'X' (4'7 1/2\", 5'1 1/2\", 5'7 1/2\"), FIRE RATING (45 STC), ACOUSTICAL RATING (W/ BATTS) (45 STC).

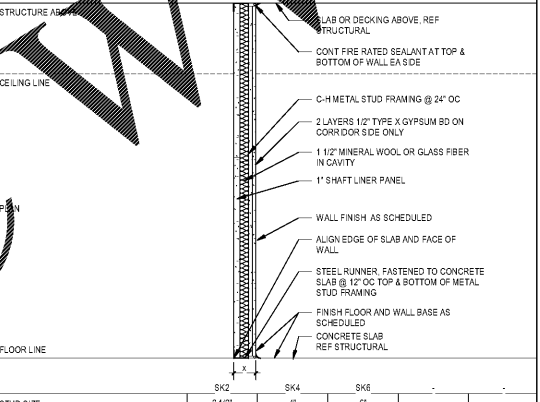


Table for partition type SK. Columns: STUD SIZE (2'12\", 3'6\", 4'0\"), ACTUAL DIMENSION 'X' (2'11 1/2\", 3'5 1/2\", 3'9 1/2\"), FIRE RATING (UL-RJ423), ACOUSTICAL RATING (W/ BATTS) (45 STC).

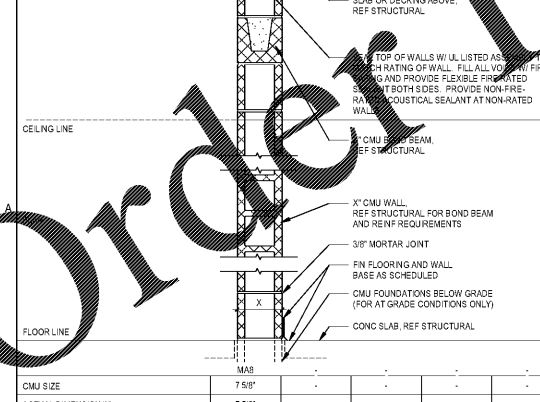


Table for partition type MA. Columns: CMU SIZE (7'6\"), ACTUAL DIMENSION 'X' (7'6\"), FIRE RATING (48 STC - HLW), ACOUST. RATING (HOLLOW/SOLID) (48 STC - HLW / 55 STC - SOLID).

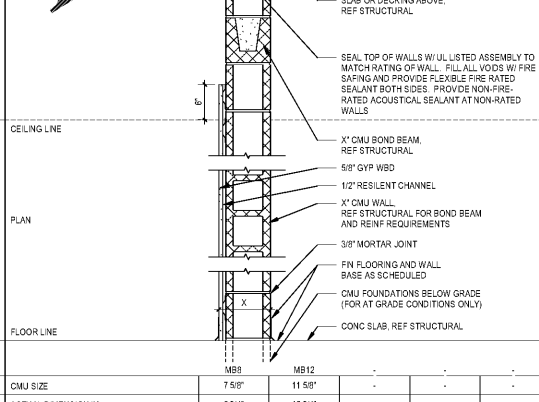


Table for partition type MB. Columns: CMU SIZE (7'6\", 11'6\"), ACTUAL DIMENSION 'X' (7'6\", 11'6\"), FIRE RATING (48 STC - HLW), ACOUST. RATING (HOLLOW/SOLID) (48 STC - HLW / 55 STC - SOLID).

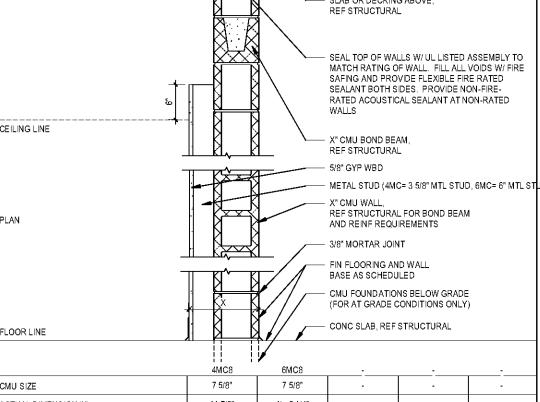


Table for partition type MC. Columns: CMU SIZE (7'6\", 11'6\"), ACTUAL DIMENSION 'X' (7'6\", 11'6\"), FIRE RATING (48 STC - HLW), ACOUST. RATING (HOLLOW/SOLID) (48 STC - HLW / 55 STC - SOLID).