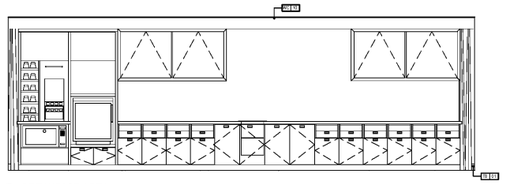

1 BREAKFAST AREA
ID4.00 SCALE: 1/4" = 1'-0"

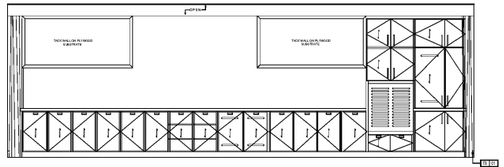

2 BREAKFAST AREA
ID4.00 SCALE: 1/4" = 1'-0"



3 BREAKFAST AREA
ID4.00 SCALE: 1/4" = 1'-0"



4 REGISTRATION DESK
ID4.00 SCALE: 1/4" = 1'-0"



5 WORKSTATIONS
ID4.00 SCALE: 1/4" = 1'-0"

6 MARKET
ID4.00 SCALE: 1/4" = 1'-0"

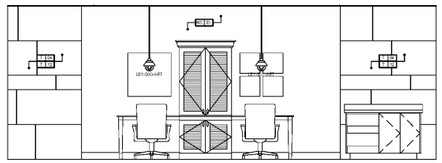

7 BUSINESS STATION
ID4.00 SCALE: 1/4" = 1'-0"

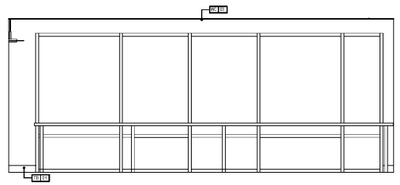

8 LOBBY WINDOW WALL 1
ID4.00 SCALE: 1/4" = 1'-0"



9 LOBBY WINDOW WALL 2
ID4.00 SCALE: 1/4" = 1'-0"

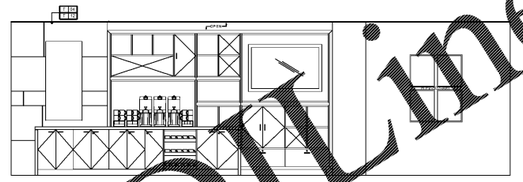

10 MEDIA WALL
ID4.00 SCALE: 1/4" = 1'-0"

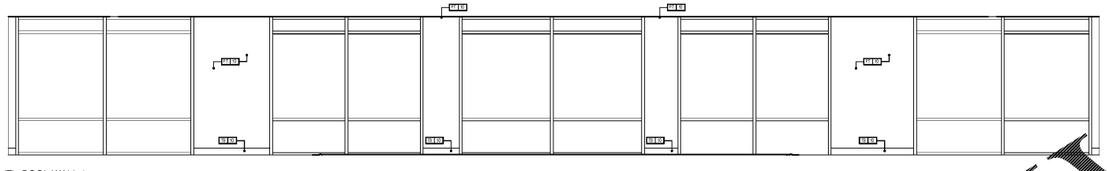

11 POOL WALL 1
ID4.00 SCALE: 1/4" = 1'-0"

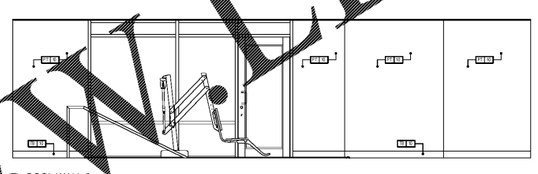

12 POOL WALL 2
ID4.00 SCALE: 1/4" = 1'-0"

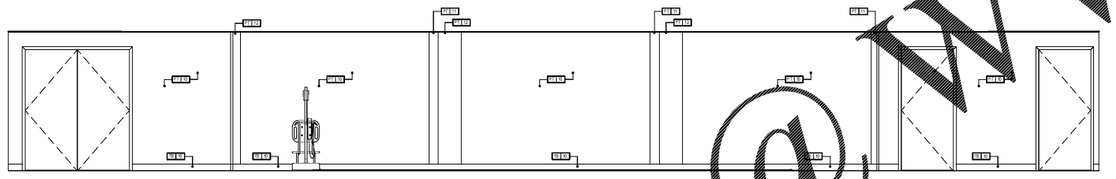

13 POOL WALL 3
ID4.00 SCALE: 1/4" = 1'-0"

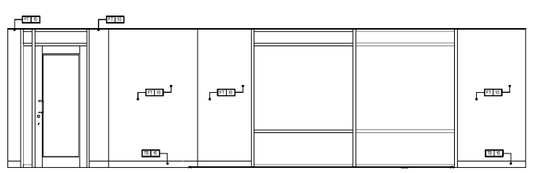

14 POOL WALL 4
ID4.00 SCALE: 1/4" = 1'-0"

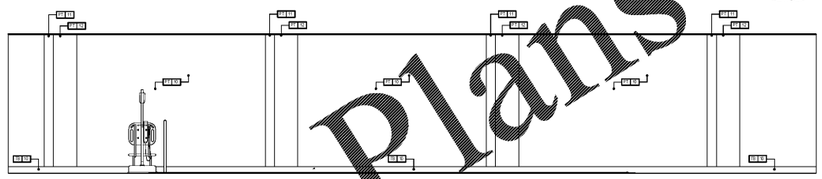

13.1 POOL WALL 3 PAINT DETAILS
ID4.00 SCALE: 1/4" = 1'-0"



15 POOL RESTROOMS CORRIDOR
ID4.00 SCALE: 1/4" = 1'-0"



16 MEN'S POOL RR WALL 1
ID4.00 SCALE: 1/4" = 1'-0"



17 MEN'S POOL RR WALL 2
ID4.00 SCALE: 1/4" = 1'-0"



18 MEN'S POOL RR WALL 3
ID4.00 SCALE: 1/4" = 1'-0"



19 MEN'S POOL RR WALL 4
ID4.00 SCALE: 1/4" = 1'-0"



20 WOMEN'S POOL RR WALL 1
ID4.00 SCALE: 1/4" = 1'-0"



21 WOMEN'S POOL RR WALL 2
ID4.00 SCALE: 1/4" = 1'-0"



22 WOMEN'S POOL RR WALL 3
ID4.00 SCALE: 1/4" = 1'-0"



23 WOMEN'S POOL RR WALL 4
ID4.00 SCALE: 1/4" = 1'-0"

KEY NOTES:

FINISH LEGEND:

CB	CARPET BASE
CP	CARPET
T	TILE
TB	TILE BASE
WB	WOOD BASE
SC	SEALED CONCRETE
RB	RESILIENT BASE
RT	RESILIENT FLOOR
VCT	VINYL COMPOSITION TILE
WC	WALL COVERING
PT	PAINT

NOTE:
REFER TO FF&E SPECIFICATIONS MANUAL FOR ITEMS NOT SPECIFICALLY LISTED WITHIN THIS DRAWING.

SHEET NOTES:

A. INTERIOR DIMENSIONS PROVIDED BY AK DESIGN GROUP ARE FOR REFERENCE ONLY. CONTRACTOR TO VERIFY ALL DIMENSIONS AND CONDITIONS.

B. PRIOR TO BEGINNING ALL WORK, VERIFY ALL EXISTING DIMENSIONS AND SQUARE FOOTAGES. NOTIFY THE DESIGNER OF ANY DISCREPANCIES PRIOR TO CONSTRUCTION. DO NOT RELY ON SCALED PLANS FOR ACCURATE DIMENSIONS.

C. TO ENSURE GOOD QUALITY APPEARANCE AND ADHESION, THE SUB FLOOR MUST BE HARD, SMOOTH, CLEAN, DRY, AND FREE FROM DEFECTS. USE OF A SUITABLE LEVELING COMPOUND IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS WILL ENSURE THAT NO IRREGULARITIES SHOW THROUGH TO THE SURFACE OF THE FINISHED FLOOR.

D. TRANSITIONS OF ALL FLOORING MATERIALS SHOULD OCCUR AT THE CENTERLINE OF THE DOOR OR CASED OPENING, FLOAT FLOOR AS REQUIRED.

E. ALLOW ALL ADHESIVE AND SUB FLOOR TO STABILIZE TO CONSTANT TEMPERATURE CONDITIONS OF 70 DEGREES FOR A PERIOD OF 24 HOURS BEFORE AND AFTER INSTALLATION. ENSURE THAT ADHESIVE HAS BEEN PROTECTED FROM FROST DURING STORAGE.

F. FIT CARPET NEATLY AT WALLS, COLUMNS, ADJACENT FLOORING, ETC. INSTALL CARPET TRIM/DUSER STRIP OR TRANSITION STRIP WHERE EDGE OF CARPET IS EXPOSED AND WHERE CARPET ABUTS OTHER MATERIAL.

G. CARPET SHALL LAY THE SAME DIRECTION, UNLESS SHOWN OTHERWISE. CARPET TO HAVE MINIMAL SEAMS; CROSS JOINTS ARE NOT PERMITTED. AVOID SEAMING NEAR CORNERS AND DOORS.

H. ALL PORCELAIN TILE TO BE CLEANED AND SEALED PRIOR TO INSTALLATION.

I. NO SUBSTITUTIONS OF GRADE, QUALITY, OR MANUFACTURER SHALL BE ALLOWED WITHOUT THE APPROVAL OF AK DESIGN STUDIO.

Order Plans @ WWW.DILine.com

AK DESIGN GROUP, LLC
HOSPITALITY INTERIORS

MEMPHIS OFFICE
7975 Stage Hills Boulevard, Suite 11
Memphis TN 38133
P: 901.384.9336
F: 855.850.8790

NASHVILLE OFFICE
1918 Patterson Road
Brentwood TN 37027

INTERIOR DESIGN DRAWINGS FOR
HOME 2
ASHEVILLE, NC

ISSUED: DATE

PUBLIC AREA ELEVATIONS AND DETAILS
FOR CONSTRUCTION

	DATE	SET

ID4.00